AP

(72) PANTOLIANO, Michael W., US

(72) RHIND, Alexander W., US

(72) SALEMME, Francis R., US

(72) SPRINGER, Barry A., US

(72) BONE, Roger F., US

(72) PETRELLA, Eugenio C., US

(71) 3-DIMENSIONAL PHARMACEUTICALS, INC., US

(51) Int.Cl.^{6} G01N 33/53, G01N 21/71, C12Q 1/68, G01N 1/00, G01N 21/64, G01N 33/566, G01N 33/542, G01N 33/483, C12M 1/40, C12Q 1/37, C12M 1/34, C12Q 1/25

(30) 1996/05/09 (60/017,860) US

(54) PROCEDE D'ANALYSE ET APPAREIL A CHANGEMENT THERMIQUE ET A MICROPLAQUE POUR L'OPTIMISATION DE LA MISE AU POINT DE LIGANDS ET DE LA CHIMIE DES PROTEINES A VARIABLES MULTIPLES

(54) MICROPLATE THERMAL SHIFT ASSAY AND APPARATUS FOR LIGAND DEVELOPMENT AND MULTI-VARIABLE PROTEIN CHEMISTRY OPTIMIZATION
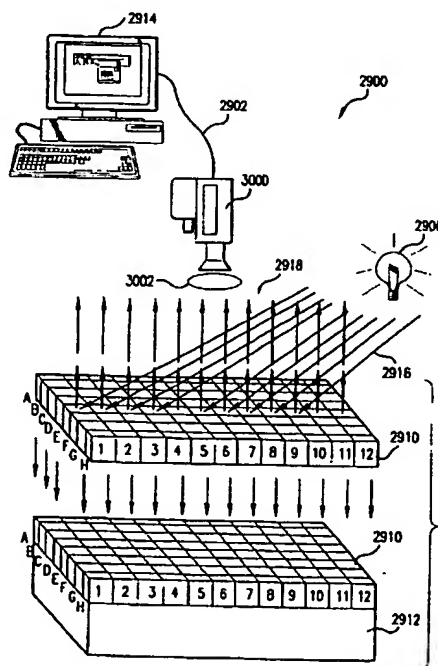
(57) Procédé permettant de classer l'affinité d'une multiplicité de molécules différentes pour une molécule cible qui est capable de se dénaturer en raison d'un changement thermique. Ledit procédé consiste à mettre

(57) The present invention is a method for ranking the affinity of each of a multiplicity of different molecules for a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting

en contact la molécule cible avec une molécule de la multiplicité de molécules différentes dans une multiplicité de récipients, à mesurer dans chacun des récipients un changement physique associé à la dénaturation thermique de la molécule cible résultant de la chauffe dans chacun des récipients, à établir une courbe de dénaturation thermique pour la molécule cible en fonction de la température de chacun des récipients et à déterminer à partir de cela une température médiane (T_m), à comparer la T_m de chacune des courbes de dénaturation thermique avec la T_m d'une courbe de dénaturation thermique obtenue pour la molécule cible en l'absence de toute autre molécule parmi la multiplicité de molécules différentes, et à classer les affinités de la multiplicité de molécules différentes selon le changement de T_m de chacune des courbes de dénaturation thermique. La présente invention concerne également un appareil d'analyse qui comporte un dispositif de réglage de température permettant de chauffer simultanément une pluralité d'échantillons, et un dispositif récepteur destiné à recevoir les émissions spectrales provenant des échantillons tandis qu'ils sont chauffés. Selon d'autres aspects de la présente invention, le dispositif récepteur peut être configuré pour recevoir des émissions fluorescentes, de la lumière ultraviolette et de la lumière visible. Ledit récepteur peut être configuré pour recevoir l'émission spectrale provenant d'échantillons de différentes manières, par ex. d'un échantillon à la fois, simultanément de plus d'un échantillon ou simultanément de tous les échantillons. Le dispositif de réglage de température peut être équipé d'un dispositif de régulation de température permettant de modifier la température selon un profil prédéterminé.

the target molecule with one molecule of the multiplicity of different molecules in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from the heating in each of the containers, generating a thermal denaturation curve for the target molecule as a function of temperature for each of the containers and determining a midpoint temperature (T_m) therefrom, comparing the T_m of each of the thermal denaturation curves with the T_m of a thermal denaturation curve obtained for the target molecule in the absence of any of the molecules in the multiplicity of different molecules, and ranking the affinities of the multiplicity of different molecules according to the change in T_m of each of the thermal denaturation curves. The present invention also provides an assay apparatus for that includes a temperature adjusting means for simultaneously heating a plurality of samples, and a receiving means for receiving spectral emission from the samples while the samples are being heated. In further aspects of the invention, the receiving means can be configured to receive fluorescent emission, ultraviolet light, and visible light. The receiving means can be configured to receive spectral emission from the samples in a variety of ways, e.g., one sample at a time, simultaneously from more than one sample, or simultaneously from all of the samples. The temperature adjusting means can be configured with a temperature controller for changing temperature in accordance with a pre-determined profile.

PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G01N 33/48, 35/00	A1	(11) International Publication Number: WO 97/42500
		(43) International Publication Date: 13 November 1997 (13.11.97)

(21) International Application Number: PCT/US97/08154	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 9 May 1997 (09.05.97)	
(30) Priority Data: 60/017,860 9 May 1996 (09.05.96) US	
(71) Applicant: 3-DIMENSIONAL PHARMACEUTICALS, INC. [US/US]; Eagleview Corporate Center, Suite 104, 665 Stockton Drive, Exton, PA 19341 (US).	
(72) Inventors: PANTOLIANO, Michael, W.; 570 Chandler Mill Road, Avondale, PA 19311 (US). RHIND, Alexander, W.; 604 Harvard Lane, Libertyville, IL 60048 (US). SALEMME, Francis, R.; 1970 Timber Lakes, Yardley, PA 19067 (US). SPRINGER, Barry, A.; 208 Charleston Drive, Wilmington, DE 19808 (US). BONE, Roger, F.; 797 Garfield Avenue, Bridgewater, NJ 08807 (US). PETRELLA, Eugenio, C.; 304 Fairfax Court, Wayne, PA 19087 (US).	**Published** *With international search report.* *Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*
(74) Agents: GOLDSTEIN, Jorge, A. et al.; Sterne, Kessler, Goldstein & Fox P.L.L.C., Suite 600, 1100 New York Avenue, N.W., Washington, DC 20005-3934 (US).	

(54) Title: MICROPLATE THERMAL SHIFT ASSAY AND APPARATUS FOR LIGAND DEVELOPMENT AND MULTI-VARIABLE PROTEIN CHEMISTRY OPTIMIZATION

(57) Abstract

The present invention is a method for ranking the affinity of each of a multiplicity of different molecules for a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with one molecule of the multiplicity of different molecules in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from the heating in each of the containers, generating a thermal denaturation curve for the target molecule as a function of temperature for each of the containers and determining a midpoint temperature (T_m) therefrom, comparing the T_m of each of the thermal denaturation curves with the T_m of a thermal denaturation curve obtained for the target molecule in the absence of any of the molecules in the multiplicity of different molecules, and ranking the affinities of the multiplicity of different molecules according to the change in T_m of each of the thermal denaturation curves. The present invention also provides an assay apparatus for that includes a temperature adjusting means for simultaneously heating a plurality of samples, and a receiving means for receiving spectral emission from the samples while the samples are being heated. In further aspects of the invention, the receiving means can be configured to receive fluorescent emission, ultraviolet light, and visible light. The receiving means can be configured to receive spectral emission from the samples in a variety of ways, e.g., one sample at a time, simultaneously from more than one sample, or simultaneously from all of the samples. The temperature adjusting means can be configured with a temperature controller for changing temperature in accordance with a pre-determined profile.

Microplate Thermal Shift Assay and Apparatus for Ligand Development and Multi-Variable Protein Chemistry Optimization

5   This application claims priority to U.S. provisional application no. 60/017,860, filed May 9, 1996, the entirety of which is incorporated by reference.

Statement as to Rights to Inventions Made Under Federally-Sponsored Research and Development

Part of the work performed during development of this invention utilized U.S. Government funds. The U.S. Government has certain rights in this
10   invention.

Background of the Invention

Field of the Invention

The present invention relates generally to the screening of compound and combinatorial libraries. More particularly, the present invention relates to a
15   method and apparatus for performing assays, particularly thermal shift assays.

Related Art

In recent years, pharmaceutical researchers have turned to combinatorial libraries as sources of new lead compounds for drug discovery. A combinatorial library is a collection of chemical compounds which have been generated, by
20   either chemical synthesis or biological synthesis, by combining a number of chemical "building blocks" as reagents. For example, a combinatorial polypeptide library is formed by combining a set of amino acids in every possible way for a given compound length (i.e., the number of amino acids in a polypeptide compound). Millions of chemical compounds can theoretically be
25   synthesized through such combinatorial mixing of chemical building blocks. Indeed, one investigator has observed that the systematic, combinatorial mixing of 100 interchangeable chemical building blocks results in the theoretical

synthesis of 100 million tetrameric compounds or 10 billion pentameric compounds (Gordon, E.M. *et al., J. Med. Chem.* *37*:1233-1251 (1994)).

The rate of combinatorial library synthesis is accelerated by automating compound synthesis and evaluation. For example, DirectedDiversity® is a computer based, iterative process for generating chemical entities with defined physical, chemical and/or bioactive properties. The DirectedDiversity® system is disclosed in U.S. Patent 5,463,564, which is herein incorporated by reference in its entirety.

Once a library has been constructed, it must be screened to identify compounds which possess some kind of biological or pharmacological activity. To screen a library of compounds, each compound in the library is equilibrated with a target molecule of interest, such as an enzyme. A variety of approaches have been used to screen combinatorial libraries for lead compounds. For example, in an encoded library, each compound in a chemical combinatorial library can be made so that an oligonucleotide "tag" is linked to it. A careful record is kept of the nucleic acid tag sequence for each compound. A compound which exerts an effect on the target enzyme is selected by amplifying its nucleic acid tag using the polymerase chain reaction (PCR). From the sequence of the tag, one can identify the compound (Brenner, S. *et al., Proc. Natl. Acad. Sci. USA* *89*:5381-5383 (1992)). This approach, however, is very time consuming because it requires multiple rounds of oligonucleotide tag amplification and subsequent electrophoresis of the amplification products.

A filamentous phage display peptide library can be screened for binding to a biotinylated antibody, receptor or other binding protein. The bound phage is used to infect bacterial cells and the displayed determinant (i.e., the peptide ligand) is then identified (Scott, J.K. *et al., Science* *249*:386-390 (1990)). This approach suffers from several drawbacks. It is time consuming. Peptides which are toxic to the phage or to the bacterium cannot be studied. Moreover, the researcher is limited to investigating peptide compounds.

In International Patent Application WO 94/05394 (1994), Hudson, D. et al., disclose a method and apparatus for synthesizing and screening a

combinatorial library of biopolymers on a solid-phase plate, in an array of 4 X 4
to 400 X 400. The library can be screened using a fluorescently labeled,
radiolabeled, or enzyme-linked target molecule or receptor. The drawback to this
approach is that the target molecule must be labeled before it can be used to
5   screen the library.

A challenge presented by currently available combinatorial library
screening technologies is that they provide no information about the relative
binding affinities of different ligands for a receptor protein. This is true whether
the process for generating a combinatorial library involves phage library display
10   of peptides (Scott, J.K. et al., Science 249:386-390 (1990)), random synthetic
peptide arrays (Lam, K.S. et al., Nature 354:82-84 (1991)), encoded chemical
libraries (Brenner, S. et al., Proc. Natl. Acad. Sci. USA 89:5381-5383 (1992)), the
method of Hudson (Intl. Appl. WO 94/05394), or most recently, combinatorial
organic synthesis (Gordon, E. et al., J. Med. Chem. 37:1385-1399 (1994)).

15   To acquire quantitative binding data from the high throughput screening
of ligand affinities for a target enzyme, researchers have relied on assays of
enzyme activity. Enzymes lend themselves to high throughput screening because
the effect of ligand binding can be monitored using kinetic assays. The
experimental endpoint is usually a spectrophotometric change. Using a kinetic
20   assay, most researchers use a two-step approach to lead compound discovery.
First, a large library of compounds is screened against the target enzyme to
determine if any of the library compounds are active. These assays are usually
performed in a single concentration (between 10^{-4}-10^{-6} M) with one to three
replicates. Second, promising compounds obtained from the first screen (i.e.,
25   compounds which display activity greater than a predetermined value) are usually
re-tested to determine a 50% inhibitory concentration (IC_{50}), an inhibitor
association constant (K_i), or a dissociation constant (K_d). This two-step approach,
however, is very labor intensive, time-consuming and prone to error. Each re-
tested sample must either be retrieved from the original assay plate or weighed
30   out and solubilized again. A concentration curve must then be created for each
sample and a separate set of assay plates must be created for each assay.

There are other problems associated with the biochemical approach to high throughput screening of combinatorial libraries. Typically, a given assay is not applicable to more than one receptor. That is, when a new receptor becomes available for testing, a new assay must be developed. For many receptors, reliable

5   assays are simply not available. Even if an assay does exist, it may not lend itself to automation. Further, if a K_i is the endpoint to be measured in a kinetic assay, one must first guess at the concentration of inhibitor to use, perform the assay, and then perform additional assays using at least six different concentrations of inhibitor. If one guesses too low, an inhibitor will not exert its inhibitory effect

10   at the suboptimal concentration tested.

In addition to the drawbacks to the kinetic screening approach described above, it is difficult to use the kinetic approach to identify and rank ligands that bind outside of the active site of the enzyme. Since ligands that bind outside of the active site do not prevent binding of spectrophotometric substrates, there is

15   no spectrophotometric change to be monitored. An even more serious drawback to the kinetic screening approach is that non-enzyme receptors cannot be assayed at all.

Thermal protein unfolding, or thermal "shift," assays have been used to determine whether a given ligand binds to a target receptor protein. In a physical

20   thermal shift assay, a change in a biophysical parameter of a protein is monitored as a function of increasing temperature. For example, in calorimetric studies, the physical parameter measured is the change in heat capacity as a protein undergoes temperature induced unfolding transitions. Differential scanning calorimetry has been used to measure the affinity of a panel of azobenzene ligands for

25   streptavidin (Weber, P. *et al., J. Am. Chem. Soc. 16*:2717-2724 (1994)). Titration calorimetry has been used to determine the binding constant of a ligand for a target protein (Brandts, J. *et al., American Laboratory 22*:30-41 (1990)). The calorimetric approach, however, requires that the researcher have access to a calorimetric device. In addition, calorimetric technologies do not lend themselves

30   to the high throughput screening of combinatorial libraries, **three thermal scans per day are routine.

Like calorimetric technologies, spectral technologies have been used to monitor temperature induced protein unfolding (Bouvier, M. *et al., Science* 265:398-402 (1994); Chavan, A.J. *et al., Biochemistry* 33:7193-7202 (1994); Morton, A. *et al., Biochemistry* 1995:8564-8575 (1995)). The calorimetric and

5   spectral thermal shift studies described above all share a common limitation. In each study, only one binding reaction was heated and assayed at a time. The single sample heating and assay configuration, as conventionally performed, has impeded the application of thermal shift technologies to high throughput screening of combinatorial libraries. Thus, there is a need for a thermal shift

10   technology which can be used to screen combinatorial libraries, can be used to identify and rank lead compounds, and is applicable to all receptor proteins.

Thermal shift assays have been used to determine whether a ligand binds to DNA. Calorimetric, absorbance, circular dichroism, and fluorescence technologies have been used (Pilch, D.S. *et al., Proc. Natl. Acad. Sci. U.S.A.*

15   91:9332-9336 (1994); Lee, M. *et al., J. Med. Chem.* 36:863-870 (1993); Butour, J.-L. *et al., Eur. J. Biochem.* 202:975-980 (1991); Barcelo, F. *et al., Chem. Biol. Interactions* 74:315-324 (1990)). As used conventionally, however, these technologies have impeded the high throughput screening of nucleic acid receptors for lead compounds which bind with high affinity. Thus, there is a need

20   for a thermal shift technology which can be used to identify and rank the affinities of lead compounds which bind to DNA sequences of interest.

When bacterial cells are used to overexpress exogenous proteins, the recombinant protein is often sequestered in bacterial cell inclusion bodies. For the recombinant protein to be useful, it must be purified from the inclusion

25   bodies. During the purification process, the recombinant protein is denatured and must then be renatured. It is impossible to predict the renaturation conditions that will facilitate and optimize proper refolding of a given recombinant protein. Usually, a number of renaturing conditions must be tried before a satisfactory set of conditions is discovered. In a study by Tachibana *et al.*, each of four disulfide

30   bonds were singly removed, by site-directed mutagenesis, from hen lysozyme (Tachibana *et al., Biochemistry* 33:15008-15016 (1994)). The mutant genes were

expressed in bacterial cells and the recombinant proteins were isolated from inclusion bodies. Each of the isolated proteins were renatured under different temperatures and glycerol concentrations. The efficacy of protein refolding was assessed in a bacteriolytic assay in which bacteriolytic activity was measured as a function of renaturing temperature. The thermal stability of each protein was studied using a physical thermal shift assay. In this study, however, only one sample reaction was heated and assayed at a time. The single sample heating and assay configuration prevents the application of thermal shift technologies to high throughput screening of a multiplicity of protein refolding conditions. Thus, there is a need for a thermal shift technology which can be used to rank the efficacies of various protein refolding conditions.

Over the past four decades, X-ray crystallography and the resulting atomic models of proteins and nucleic acids have contributed greatly to an understanding of structural, molecular, and chemical aspects of biological phenomena. However, crystallographic analysis remains difficult because there are not straightforward methodologies for obtaining X-ray quality protein crystals. Conventional methods cannot be used quickly to identify crystallization conditions that have highest probability of promoting crystallization (Garavito, R.M. *et al., J. Bioenergtics and Biomembranes 28*:13-27 (1996)). Even the use of factorial design experiments and successive automated grid searches (Cox, M.J., & Weber, P.C., *J. Appl. Cryst. 20*:366-373 (1987); Cox, M.J., & Weber, P.C., *J. Crystal Growth 90*:318-324 (1988)) do not facilitate rapid, high throughput screening of biochemical conditions that promote the crystallization of X-ray quality protein crystals. Moreover, different proteins are expected to require different conditions for protein crystallization, just as has been the experience for their folding (McPherson, A., In: *Preparation and Analysis of Protein Crystals*, Wiley Interscience, New York, (1982)). Conventional methods of determining crystallization conditions are cumbersome, slow, and labor intensive. Thus, there is a need for a rapid, high throughput technology which can be used to rank the efficacies of protein crystallization conditions.

-7-

Rapid, high throughput screening of combinatorial molecules or biochemical conditions that stabilize target proteins in thermal shift assays would be facilitated by the simultaneous heating of many samples. To date, however, thermal shift assays have not been performed that way. Instead, the conventional approach to performing thermal shift assays has been to heat and assay only one sample at a time. That is, researchers conventionally 1) heat a sample to a desired temperature in a heating apparatus; 2) assay a physical change, such as absorption of light or change in secondary, tertiary, or quaternary protein structure; 3) heat the samples to the next highest desired temperature; 4) assay for a physical change; and 5) continue this process repeatedly until the sample has been assayed at the highest desired temperature.

This conventional approach is disadvantageous for at least two reasons. First, this approach is labor intensive. Second, this approach limits the speed with which thermal shift screening assays can be performed and thereby precludes rapid, high-throughput screening of combinatorial molecules binding to a target receptor and biochemical conditions that stabilize target proteins. Thus, there is a need for an apparatus capable of performing rapid, high-throughput thermal shift assays that will be suitable for all receptors, including reversibly folding proteins.

Summary of the Invention

The present invention provides a multi-variable method for ranking the efficacy of one or more of a multiplicity of different molecules or different biochemical conditions for stabilizing a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with one or more of a multiplicity of different molecules or different biochemical conditions in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from heating, generating a thermal denaturation curve for the target

molecule as a function of temperature for each of the containers, comparing each of the denaturation curves to (i) each of the other thermal denaturation curves and to (ii) the thermal denaturation curve obtained for the target molecule under a reference set of biochemical conditions, and ranking the efficacies of multiplicity of different molecules or the different biochemical conditions according to the change in each of the thermal denaturation curves.

The present invention provides a multi-variable method for optimizing the shelf life of a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with one or more of a multiplicity of different molecules or different biochemical conditions in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from heating, generating a thermal denaturation curve for the target molecule as a function of temperature for each of the containers, comparing each of the denaturation curves to (i) each of the other thermal denaturation curves and to (ii) the thermal denaturation curve obtained for the target under a reference set of biochemical conditions, and ranking the efficacies of multiplicity of different molecules or the different biochemical conditions according to the change in each of the thermal denaturation curves.

The present invention also provides a multi-variable method for ranking the affinity of a combination of two or more of a multiplicity of different molecules for a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with a combination of two or more different molecules of the multiplicity of different molecules in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from the heating, generating a thermal denaturation curve for the target molecule as a function of temperature for each of the containers, comparing each of the thermal

denaturation curves with (i) each of the other thermal denaturation curves obtained for the target molecule and to (ii) the thermal denaturation curve for the target molecule in the absence of any of the two or more different molecules, and ranking the affinities of the combinations of the two or more multiplicity of different molecules according to the change in each of the thermal denaturation curves.

The present invention also provides a multi-variable method for ranking the efficacies of one or more of a multiplicity of different biochemical conditions to facilitate the refolding of a sample of a denatured protein. The method comprises placing one of the refolded protein samples in each of a multiplicity of containers, wherein each of the refolded protein samples has been previously refolded according to one or more of the multiplicity of conditions, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the protein resulting from heating, generating a thermal denaturation curve for the protein as a function of temperature for each of the containers, comparing each of the denaturation curves to (i) each of the other thermal denaturation curves and to (ii) the thermal denaturation curve obtained for the native protein under a reference set of biochemical conditions, and ranking the efficacies of the multiplicity of different refolding conditions according to the change in the magnitude of the physical change of each of the thermal denaturation curves.

The present invention also provides a further multi-variable method for ranking the efficacies of one or more of a multiplicity of different biochemical conditions to facilitate the refolding of a sample of a denatured protein, which comprises determining one or more combinations of a multiplicity of different conditions which promote protein stabililty, folding the denatured protein under said one or more combinations of biochemical conditions that were identified as promoting protein stabilization, asseessing folded protein yield, ranking the efficacies of said multiplicity of different refolding conditions according to folded protein yield, and repeating these steps until a combination of biochemical conditions that promote optimal protein folding are identified.

Using the microplate thermal shift assay, one can determine one or more biochemical conditions have an additive effect on protein stability. Once a set of biochemical conditions that facilitate an increase in protein stability have been identified using the thermal shift assay, the same set of conditions can be used in protein folding experiments with recombinant protein. If the conditions that promote protein stability in the thermal shift assay correlate with conditions that promote folding of recombinant protein, conditions can be further optimized by performing additional thermal shift assays until a combination of stabilizing conditions that result in further increase protein stability are identified. Recombinant protein is then folded under those conditions. This process is repeated until optimal folding conditions are identified.

The present invention also provides a multi-variable method for ranking the efficacy of one or more of a multiplicity of different biochemical conditions for facilitating the crystallization of a protein which is capable of denaturing due to a thermal change. The method comprises contacting the protein with one or more of the multiplicity of different biochemical conditions in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the protein resulting from the heating, generating a thermal denaturation curve for the protein as a function of temperature for each of the containers, comparing each of the denaturation curves to (i) each of the other thermal denaturation curves and (ii) to the thermal denaturation curve obtained using a reference set of biochemical conditions, and ranking the efficacies of the multiplicity of different biochemical conditions according to the change in each of the thermal denaturation curves.

The present invention also provides a method for ranking the affinity of each of a multiplicity of different molecules for a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with one molecule of a multiplicity of different molecules in each of a multiplicity of containers, simultaneously heating the containers, measuring in each of the containers a physical change associated with the thermal

denaturation of the target molecule resulting from heating, generating a thermal denaturation curve for the target molecule as a function of temperature in each of the containers, comparing each of the thermal denaturation curves with the thermal denaturation curve obtained for the target molecule in the absence of any of the molecules in the multiplicity of different molecules, and ranking the affinities of each molecule according to the change in each of the thermal denaturation curves.

The present invention also provides a method for assaying a pool or collection of a multiplicity of different molecules for a molecule which binds to a target molecule which is capable of denaturing due to a thermal change. The method comprises contacting the target molecule with a collection of at least two molecules of a multiplicity of different molecules in each of a multiplicity of containers, simultaneously heating the multiplicity of containers, measuring in each of the containers a physical change associated with the thermal denaturation of the target molecule resulting from heating, generating a set of thermal denaturation curves for the target molecule as a function of temperature for each of the containers, comparing each of the thermal denaturation curves with the thermal denaturation curve obtained for the target molecule in the absence of any of the molecules in the multiplicity of different molecules, ranking the affinities of the collections of different molecules according to the change in each of the thermal denaturation curves, selecting the collection of different molecules which contains a molecule with affinity for the target molecule, dividing the selected collection into smaller collections of molecules in each of a multiplicity of containers, and repeating the above steps until a single molecule responsible for the original thermal shift in the multiplicity of molecules is identified.

This invention also provides an improved method for generating lead compounds which comprises synthesizing a multiplicity of compounds and testing the ability of each compound to bind to a receptor molecule. The improvement comprises contacting the receptor molecule with one compound of a multiplicity of different compounds in each of a multiplicity of wells in a microplate, simultaneously heating the wells, measuring in each of the wells a

physical change, resulting from heating, associated with the thermal denaturation of the receptor molecule, generating a thermal denaturation curve for the receptor molecule as a function of temperature in each of the wells, comparing each of the thermal denaturation curves with the thermal denaturation curve obtained for the receptor molecule in the absence of any of the compounds in the multiplicity of different compounds, and ranking the affinities of each compound according to the change in each of the thermal denaturation curves.

The present invention also provides a product of manufacture which comprises a carrier having a multiplicity of containers therein, each of the containers containing a target molecule which is capable of denaturation due to heating, and at least one molecule selected from a multiplicity of different molecules present in a combinatorial library, wherein each of the different molecules are present in a different one of the multiplicity of containers in the carrier.

Optimization of protein stability, ligand binding, protein folding, and protein crystallization are multi-variable events. Multi-variable optimization problems require large numbers of parallel experiments to collect as much data as possible in order to determine which variables influence a favorable response. For example, multi-variable optimization problems require large numbers of parallel experiments to collect as much data as possible in order to determine which variables influence protein stabililty. In this regard, both protein crystallization and quantitative structure activity relationship analyses have greatly benefited from mass screening protocols that employ matrix arrays of incremental changes in biochemical or chemical composition. Thus, in much the same way that quantitative structure activity relationships are constructed to relate variations of chemical functional groups on ligands to their effect on binding affinity to a given therapeutic receptor, the methods and apparatus of the present invention facilitate the construction of a quantitative model that relates different biochemical conditions to experimentally measured protein stability, ligand specificity, folded protein yield, and crystallized protein yield.

The present invention offers a number of advantages over previous technologies that are employed to optimize multi-variable events such as protein stabilization, ligand binding, protein folding, and protein crystallization. Foremost among these advantages is that the present invention facilitates high throughput screening. Further, the present invention offers a number of advantages over previous technologies that are employed to screen combinatorial libraries. Foremost among these advantages is that the present invention facilitates high throughput screening of combinatorial libraries for lead compounds. Many current library screening technologies simply indicate whether a ligand binds to a receptor or not. In that case, no quantitative information is provided. No information about the relative binding affinities of a series of ligands is provided. In contrast, the present invention facilitates the ranking of a series of compounds for their relative affinities for a target receptor. With this information in hand, a structure-activity relationship can be developed for a set of compounds. The ease, reproducibility, and speed of using ligand-dependent changes in midpoint unfolding temperature (T_m) to rank relative binding affinities makes the present invention a powerful tool in the drug discovery process.

Typically, the conventional kinetic screening approach requires at least six additional well assays at six different concentrations of inhibitor to determine a K_i. Using the present invention, throughput is enhanced ~6 fold over the enzyme based assays because one complete binding experiment can be performed in each well of a multiwell microplate. The kinetic screening approached are even further limited by the usual compromise between dilution and signal detection, which usually occurs at a protein concentration of about 1 nM. In this regard, the calorimetric approaches, either differential scanning calorimetry or isothermal titrating calorimetry, are at an even worse disadvantage since they are limited to solitary binding experiments, usually 1 per hour. In contrast, the present invention affords a wide dynamic range of measurable binding affinities, from ~10^{-4} to 10^{-15} M, in a single well.

The present invention does not require radioactively labeled compounds. Nor does it require that receptors be labeled with a fluorescent or chromophoric label.

A very important advantage of the present invention is that it can be applied universally to any receptor that is a drug target. Thus, it is not necessary to invent a new assay every time a new receptor becomes available for testing. When the receptor under study is an enzyme, researchers can determine the rank order of affinity of a series of compounds more quickly and more easily than they can using conventional kinetic methods. In addition, researchers can detect ligand binding to an enzyme, regardless of whether binding occurs at the active site, at an allosteric cofactor binding site, or at a receptor subunit interface. The present invention is equally applicable to non-enzyme receptors, such as proteins and nucleic acids.

In a further aspect of the present invention, an assay apparatus is provided that includes a heating means for simultaneously heating a plurality of samples, and a receiving means for receiving spectral emission from the samples while the samples are being heated. In yet a further aspect of the present invention, an assay apparatus is provided that includes a temperature adjusting means for simultaneously adjusting a temperature of a plurality of samples in accordance with a pre-determined temperature profile, and a receiving means for receiving spectral emission from the samples while the temperature of the samples is adjusted in accordance with the temperature profile.

In yet a further aspect, the present invention also provides an assay apparatus that includes a movable platform on which are disposed a plurality of heat conducting blocks. The temperature of the heat conducting blocks, and their samples, are adjusted by a temperature adjusting means. Each of the plurality of heat conducting blocks is adapted to receive a plurality of samples. A light source is provided for emitting an excitatory wavelength of light for the samples.

While the temperature of the samples is being adjusted, a sensor detects the spectral emission from the samples in response to the excitatory wavelength of light. The movable platform is moved between heat conducting blocks to

sequentially detect spectral emission from the samples in each of the plurality of heat conducting blocks.

The assay apparatus of the present invention affords the artisan the opportunity to rapidly screen molecules and biochemical conditions that affect protein stability. Samples are simultaneously heated over a range of temperatures. During heating, spectral emissions are received. The assay apparatus of the present invention also provides the artisan with an opportunity for conveniently and efficiently carrying out the methods of the present invention. The assay apparatus of the present invention is particularly adapted for carrying out thermal shift assays of molecules and biochemical conditions that stabilize target proteins.

Because the apparatus of the present invention comprises both a heating means and a spectral emission receiving means, the apparatus of the present invention obviates the need to heat samples in one apparatus and transfer the samples to another apparatus prior to taking spectral emission readings. As a result, the apparatus of the present invention facilitates changing temperature in accordance with a pre-determined temperature profile, rather than incremental temperature increases and intermediate cooling steps. Thus, more data points can be collected for a given sample and more accurate information can be obtained.

Further, because the assay apparatus of the present invention comprises both a heating means and a spectral emission receiving means, spectral measurements can be taken from the samples while they are being heated. Thus, using the assay apparatus of the present invention, the artisan can study both irreversibly unfolding proteins and reversibly folding proteins.

Further features and advantages of the present invention are described in detail below with reference to the accompanying drawings.

Brief Description of the Figures

The present invention is described with reference to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number identifies the drawing in which the reference number first appears.

FIGURE 1 shows the results of a microplate thermal shift assay for ligands which bind to the active site of human α-thrombin (with turbidity as the experimental signal).

FIGURE 2 shows the results of a microplate thermal shift assay for ligands which bind to acidic fibroblast growth factor (aFGF) (with turbidity as the experimental signal).

FIGURE 3 shows the results of a microplate thermal shift assay for ligand binding to the active site of human α-thrombin (with fluorescence emission as the experimental signal). The lines drawn through the data points represent non-linear least squares curve fits of the data using the equation shown at the bottom of the figure. There are five fitting parameters for this equation of y(T) vs. T: (1) y_f, the pre-transitional fluorescence for the native protein; (2) y_u, the post-transitional fluorescence for the unfolded protein; (3) T_m, the temperature at the midpoint for the unfolding transition; (4) ΔH_u, the van't Hoff unfolding enthalpy change; and (5) ΔC_{pu}, the change in heat capacity upon protein unfolding. The non-linear least squares curve fitting was accomplished using KaleidaGraph™ 3.0 software (Synergy Software, Reading PA), which allows the five fitting parameters to float while utilizing Marquardt methods for the minimization of the sum of the squared residuals.

FIGURE 4 shows the result of a microplate thermal shift assay of ligands which bind to the D(II) domain of human FGF receptor 1 (D(II) FGFR1) (with fluorescence emission as the experimental signal). The lines drawn through the data points represent non-linear least squares curve fits of the data using the equation shown at the bottom of the figure, as described for Figure 3.

-17-

FIGURE 5 shows the results of a miniaturized microplate thermal shift assay for Factor D in the absence of any ligands.

FIGURE 6 shows the results of a microplate thermal shift assay for Factor Xa in the absence of any ligands.

5   FIGURE 7 shows the results of a miniaturized microplate thermal shift assay of a ligand that binds to the catalytic site of human α-thrombin.

FIGURE 8 shows the results of a miniaturized microplate thermal shift assay of aprosulate binding to the D(II) domain of human FGF receptor 1.

FIGURE 9 shows the results of a miniaturized microplate thermal shift
10   assay for urokinase in the presence of glu-gly-arg chloromethylketone.

FIGURE 10 shows the results of a miniaturized microplate thermal shift assay of human α-thrombin in which the assay volume is 2 μl. Thermal denaturation curves for three experiments are shown.

FIGURE 11 shows the results of a miniaturized microplate thermal shift
15   assay of human α-thrombin in which the assay volume is 5 μl. Thermal denaturation curves for five experiments are shown.

FIGURE 12 shows the results of a single temperature microplate thermal shift assay of human α-thrombin in the presence of four different compounds in four separate experiments.

20   FIGURE 13 shows the results of a microplate thermal shift assay of the intrinsic tryptophan fluorescence of human α-thrombin. In this assay, blank well fluorescence was not subtracted from sample fluorescence.

FIGURE 14 shows the results of a microplate thermal shift assay of the intrinsic tryptophan fluorescence of human α-thrombin. In this assay, blank well
25   fluorescence was subtracted from sample fluorescence.

FIGURE 15 shows the results of microplate thermal shift assays of single ligand binding interactions to three different classes of binding sites for human α-thrombin.

FIGURE 16 shows the results of microplate thermal shift assays of multi-
30   ligand binding interactions for human α-thrombin.

FIGURES 17A-D show the results of microplate thermal shift assays of the effect of pH and various sodium chloride concentrations on the stability of human α-thrombin. In Figure 17A, the fluorophore is 1,8-ANS. In Figure 17B, the fluorophore is 2,6-ANS. In Figure 17C, the fluorophore is 2,6-TNS. In

5   Figure 17D, the fluorophore is bis-ANS.

FIGURE 18 shows the results of microplate thermal shift assays of the effect of calcium chloride, ethylenediaminetetraacetic acid, dithiothreitol, and glycerol on the stability of human α-thrombin.

FIGURE 19 shows the results of microplate thermal shift assays of the

10   effect of pH and sodium chloride concentration of the stability of human D(II) FGF receptor 1.

FIGURE 20 shows the results of microplate thermal shift assays of the effect of various biochemical conditions on the stability of human D(II) FGF receptor 1.

15   FIGURE 21 shows the results of microplate thermal shift assays of the effect of various biochemical conditions on the stability of human D(II) FGF receptor 1.

FIGURE 22 shows the results of microplate thermal shift assays of the effect of various biochemical conditions on the stability of human D(II) FGF

20   receptor 1.

FIGURE 23 shows the results of microplate thermal shift assays of the effect of various biochemical conditions on the stability of human D(II) FGF receptor 1.

FIGURE 24 shows the results of microplate thermal shift assays of the

25   effect of various biochemical conditions on the stability of human D(II) FGF receptor 1.

FIGURE 25 shows the results of microplate thermal shift assays of the effect of various biochemical conditions on the stability of human urokinase.

FIGURE 26 is a schematic diagram of a thermodynamic model for the

30   linkage of the free energies of protein folding and ligand binding.

FIGURE 27 is a schematic diagram of a method of screening biochemical conditions that optimize protein folding.

FIGURE 28 shows the results of microplate thermal shift assays of human α-thrombin stability using various fluorophores.

FIGURE 29 shows a schematic diagram of one embodiment of an assay apparatus of the present invention.

FIGURE 30 shows a schematic diagram of an alternate embodiment of the assay apparatus of the present invention.

FIGURE 31 shows a schematic diagram of the assay apparatus according to another embodiment of the present invention.

FIGURES 32A-E illustrate one embodiment of a thermal electric stage for the assay apparatus of the present invention. Figure 32A shows a side view of the thermal electric stage. Figure 32B shows a top view of the thermal electric stage. Figures 32C-E show three configurations of inserts that can be attached to the thermal electric stage. In one embodiment, inserts accommodate a microtitre plate. In such an embodiment, assay samples are contained within the wells of the microtitre plate.

FIGURE 33 is a schematic diagram illustrating a top view of another embodiment of the assay apparatus of the present invention.

FIGURE 34 is a schematic diagram illustrating the top view of the embodiment of the assay apparatus shown in Figure 33 with a housing installed.

FIGURE 35 is a schematic diagram illustrating a side view of the embodiment of the assay apparatus shown in Figures 33 and 34.

FIGURES 36A and 36B illustrate a temperature profile and how the temperature profile is implemented using the automated assay apparatus of the present invention.

FIGURE 37 shows an exemplary computer system suitable for use with the present invention.

FIGURE 38 shows a flow diagram illustrating one embodiment for implementation of the present invention.

FIGURE 39 shows a flow diagram illustrating an alternate embodiment for implementation of the present invention.

FIGURE 40 shows a comparison of the results of microplate thermal shift assays of human α-thrombin denaturation performed using a fluorescence scanner and a CCD camera.

FIGURES 41A and 41B show photographs of microplate thermal shift assay of human α-thrombin denaturation performed using a CCD camera. Figure 41A: V-bottom well microplate. Figure 41B: dimple microplate.

FIGURE 42 shows a comparison of the results of microplate thermal shift assays of human α-thrombin denaturation performed using a fluorescence scanner and a CCD camera.

Detailed Description of the Preferred Embodiments

In the following description, reference will be made to various terms and methodologies known to those of skill in the biochemical and pharmacological arts. Publications and other materials setting forth such known terms and methodologies are incorporated herein by reference in their entireties as though set forth in full.

Overview of the Methods of the Present Invention

The present invention provides a method for ranking a multiplicity of different molecules in the order of their ability to bind to a target molecule which is capable of unfolding due to a thermal change. In one embodiment of this method, the target molecule is contacted with one molecule of a multiplicity of different molecules in each of a multiplicity of containers. The containers are then simultaneously heated, in intervals, over a range of temperatures. After each heating interval, a physical change associated with the thermal denaturation of the target molecule is measured. In an alternate embodiment of this method, the containers are heated in a continuous fashion. A thermal denaturation curve is plotted as a function of temperature for the target molecule in each of the

containers. Preferably, the temperature midpoint, T_m, of each thermal denaturation curve is identified and is then compared to the T_m of the thermal denaturation curve obtained for the target molecule in the absence of any of the molecules in the containers. Alternatively, an entire thermal denaturation curve can be compared to other entire thermal denaturation curves using computer analytical tools.

The term "combinatorial library" refers to a plurality of molecules or compounds which are formed by combining, in every possible way for a given compound length, a set of chemical or biochemical building blocks which may or may not be related in structure. Alternatively, the term can refer to a plurality of chemical or biochemical compounds which are formed by selectively combining a particular set of chemical building blocks. Combinatorial libraries can be constructed according to methods familiar to those skilled in the art. For example, see Rapoport et al., Immunology Today 16:43-49 (1995); Sepetov, N.F. et al., Proc. Natl. Acad. Sci. U.S.A. 92:5426-5430 (1995); Gallop, M.A. et al., J. Med. Chem. 9:1233-1251 (1994); Gordon, E.M. et al., J. Med. Chem. 37:1385-1401 (1994); Stankova, M. et al., Peptide Res. 7:292-298 (1994); Erb, E. et al., Proc. Natl. Acad. Sci. U.S.A. 91:11422-11426 (1994); DeWitt, S.H. et al., Proc. Natl. Acad. Sci. U.S.A. 90:6909-6913 (1993); Barbas, C.F. et al., Proc. Natl. Acad. Sci. U.S.A. 89:4457-4461 (1992); Brenner, S. et al. Proc. Natl. Acad. Sci. U.S.A. 89:5381-5383 (1992); Lam, K.S. et al., Nature 354:82-84 (1991); Devlin, J.J. et al., Science 245:404-406 (1990); Cwirla, S.E. et al., Proc. Natl. Acad. Sci. U.S.A. 87:6378-6382 (1990); Scott, J.K. et al., Science 249:386-390 (1990). Preferably, the term "combinatorial library" refers to a DirectedDiversity library, as set forth in U.S. Patent 5,463,564. Regardless of the manner in which a combinatorial library is constructed, each molecule or compound in the library is catalogued for future reference.

The term "compound library" refers to a plurality of molecules or compounds which were not formed using the combinatorial approach of combining chemical or biochemical building blocks. Instead, a compound library is a plurality of molecules or compounds which are accumulated and are stored

-22-

for use in future ligand-receptor binding assays. Each molecule or compound in the compound library is catalogued for future reference.

The terms "multiplicity of molecules," "multiplicity of compounds," or "multiplicity of containers" refer to at least two molecules, compounds, or

5 containers.

The term "multi-variable" refers to more than one experimental variable.

The term "screening" refers to the testing of a multiplicity of molecules or compounds for their ability to bind to a target molecule which is capable of denaturing.

10 The term "ranking" refers to the ordering of the affinities of a multiplicity of molecules or compounds for a target molecule, according to the ability of the molecule or compound to shift the thermal denaturation curve of the target molecule, relative to the thermal denaturation curve of the target molecule in the absence of any molecule or compound.

15 The term "ranking" also refers to the ordering of the efficacies of a multiplicity of biochemical conditions in optimizing protein stabilization, protein folding, protein crystallization, or protein shelf life. In the context of optimization of protein stabilization, optimizaiton of protein folding, optimization of protein crystallization, and optimization of protein shelf life, the term

20 "ranking" refers to the ordering of the efficacies of one or more combinations of biochemical conditions to shift the thermal denaturation curve of the target molecule, relative to the thermal denaturation curve of the target molecule under a reference set of conditions.

The term "reference set of conditions" refers to a set of biochemical

25 conditions under which a thermal denaturation curve for a target molecule is obtained. Thermal denaturation curves obtained under conditions different than the reference conditions are compared to each other and to the thermal denaturation curve obtained for the target molecule under reference conditions.

As discussed above, ranking molecules, compounds, or biochemical

30 conditions according to a change in the T_m of a thermal denaturation curve is preferable. Alternatively, molecules, compounds, or biochemical conditions can

be ranked for their ability to stabilize a target molecule according to the change in entire thermal denaturation curve.

The term "lead molecule" refers to a molecule or compound, from a combinatorial library, which displays relatively high affinity for a target molecule. The terms "lead compound" and "lead molecule" are synonymous. The term "relatively high affinity" relates to affinities in the K_d range of from 10^{-4} to 10^{-15} M.

The term "target molecule" encompasses peptides, proteins, nucleic acids, and other receptors. The term encompasses both enzymes and proteins which are not enzymes. The term encompasses monomeric and multimeric proteins. Multimeric proteins may be homomeric or heteromeric. The term encompasses nucleic acids comprising at least two nucleotides, such as oligonucleotides. Nucleic acids can be single-stranded, double-stranded or triple-stranded. The term encompasses a nucleic acid which is a synthetic oligonucleotide, a portion of a recombinant DNA molecule, or a portion of chromosomal DNA. The term target molecule also encompasses portions of peptides, proteins, and other receptors which are capable of acquiring secondary, tertiary, or quaternary structure through folding, coiling or twisting. The target molecule may be substituted with substituents including, but not limited to, cofactors, coenzymes, prosthetic groups, lipids, oligosaccharides, or phosphate groups. The term "capable of denaturing" refers to the loss of secondary, tertiary, or quaternary structure through unfolding, uncoiling, or untwisting. The terms "target molecule" and "receptor" are synonymous.

Examples of target molecules are included, but not limited to those disclosed in Faisst, S. et al., Nucleic Acids Research 20:3-26 (1992); Pimentel, E., Handbook of Growth Factors, Volumes I-III, CRC Press, (1994); Gilman, A.G. et al., The Pharmacological Basis of Therapeutics, Pergamon Press (1990); Lewin, B., Genes V, Oxford University Press (1994); Roitt, I., Essential Immunology, Blackwell Scientific Publ. (1994); Shimizu, Y., Lymphocyte Adhesion Molecules, RG Landes (1993); Hyams, J.S. et al., Microtubules, Wiley-Liss (1995); Montreuil, J. et al., Glycoproteins, Elsevier (1995); Woolley, P.,

-24-

Lipases: Their Structure Biochemistry and Applications, Cambridge University
Press (1994); Kurjan, J., Signal Transduction: Prokaryotic and Simple Eukaryotic
Systems, Academic Press (1993); Kreis, T., et al., Guide Book to the Extra
Cellular Matrix and Adhesion Proteins, Oxford University Press (1993);
5   Schlesinger, M.J., Lipid Modifications of Proteins, CRC Press (1992); Conn,
P.M., Receptors: Model Systems and Specific Receptors, Oxford University Press
(1993); Lauffenberger, D.A. et al., Receptors: Models For Binding Trafficking
and Signaling, Oxford University Press (1993); Webb, E.C., Enzyme
Nomenclature, Academic Press (1992); Parker, M.G., Nuclear Hormone
10   Receptors; Molecular Mechanisms, Cellular Functions Clinical Abnormalities,
Academic Press Ltd. (1991); Woodgett, J.R., Protein Kinases, Oxford University
Press (1995); Balch, W.E. et al., Methods in Enzymology, 257, Pt. C: Small
GTPases and Their Regulators: Proteins Involved in Transport, Academic Press
(1995); The Chaperonins, Academic Press (1996); Pelech, L., Protein Kinase
15   Circuitry in Cell Cycle Control, RG Landes (1996); Atkinson, Regulatory
Proteins of the Complement System, Franklin Press (1992); Cooke, D.T. et al.,
Transport and Receptor Proteins of Plant Membranes: Molecular Structure and
Function, Plenum Press (1992); Schumaker, V.N., Advances in Protein
Chemistry: Lipoproteins, Apolipoproteins, and Lipases, Academic Press (1994);
20   Brann, M., Molecular Biology of G-Protein-Coupled Receptors: Applications of
Molecular Genetics to Pharmacology, Birkhauser (1992); Konig, W., Peptide and
Protein Hormones: Structure, Regulations, Activity - A Reference Manual, VCH
Publ. (1992); Tuboi, S. et al., Post-Translational Modification of Proteins, CRC
Press (1992); Heilmeyer, L.M., Cellular Regulation by Protein Phosphorylation,
25   Springer-Verlag (1991); Takada, Y., Integrin: The Biological Problem, CRC
Press (1994); Ludlow, J.W., Tumor Suppressors: Involvement in Human Disease,
Viral Protein Interactions, and Growth Regulation, RG Landes (1994);
Schlesinger, M.J., Lipid Modification of Proteins, CRC Press (1992); Nitsch,
R.M., Alzheimer's Disease: Amyloid Precursor Proteins, Signal Transduction,
30   and Neuronal Transplantation, New York Academy of Sciences (1993);
Cochrane, C. G. et al., Cellular and Molecular Mechanisms of Inflammation, Vol.

3: Signal Transduction in Inflammatory Cells, Part A, Academic Press (1992); Gupta, S. et al., Mechanisms of Lymphocyte Activation and Immune Regulation IV: Cellular Communications, Plenum Press (1992); Authi, K.S. et al., Mechanisms of Platelet Activation and Control, Plenum Press (1994); Grunicke, H., Signal Transduction Mechanisms in Cancer, RG Landes (1995); Latchman, D.S., Eukaryotic Transcription Factors, Academic Press (1995).

The term "target molecule" refers more specifically to proteins involved in the blood coagulation cascade, fibroblast growth factors, and fibroblast growth factor receptors, urokinase, and factor D.

The term "molecule" refers to the compound which is tested for binding affinity for the target molecule. This term encompasses chemical compounds of any structure, including, but not limited to nucleic acids and peptides. More specifically, the term "molecule" encompasses compounds in a compound or a combinatorial library. The terms "molecule" and "ligand" are synonymous.

The terms "thermal change" and "physical change" encompass the release of energy in the form of light or heat, the absorption of energy in the form or light or heat, changes in turbidity and changes in the polar properties of light. Specifically, the terms refer to fluorescent emission, fluorescent energy transfer, absorption of ultraviolet or visible light, changes in the polarization properties of light, changes in the polarization properties of fluorescent emission, changes in turbidity, and changes in enzyme activity. Fluorescence emission can be intrinsic to a protein or can be due to a fluorescence reporter molecule (below). For a nucleic acid, fluorescence can be due to ethidium bromide, which is an intercalating agent. Alternatively, the nucleic acid can be labeled with a fluorophore (below).

The term "contacting a target molecule" refers broadly to placing the target molecule in solution with the molecule to be screened for binding. Less broadly, contacting refers to the turning, swirling, shaking or vibrating of a solution of the target molecule and the molecule to be screened for binding. More specifically, contacting refers to the mixing of the target molecule with the molecule to be tested for binding. Mixing can be accomplished, for example, by

repeated uptake and discharge through a pipette tip. Preferably, contacting refers to the equilibration of binding between the target molecule and the molecule to be tested for binding. Contacting can occur in the container (infra) or before the target molecule and the molecule to be screened are placed in the container.

5   The target molecule may be contacted with a nucleic acid prior to being contacted with the molecule to be screened for binding. The target molecule may be complexed with a peptide prior to being contacted with the molecule to be screened for binding. The target molecule may be phosphorylated or dephosphorylated prior to being contacted with the molecule to be screened for

10   binding.

A carbohydrate moiety may be added to the target molecule before the target molecule is contacted with the molecule to be screened for binding. Alternatively, a carbohydrate moiety may be removed from the target molecule before the target molecule is contacted with the molecule to be screened for

15   binding.

The term "container" refers to any vessel or chamber in which the receptor and molecule to be tested for binding can be placed. The term "container" encompasses reaction tubes (e.g., test tubes, microtubes, vials, etc.). Preferably, the term "container" refers to a well in a multiwell microplate or microtiter plate.

20   The term "sample" refers to the contents of a container.

A "thermal denaturation curve" is a plot of the physical change associated with the denaturation of a protein or a nucleic acid as a function of temperature. See, for example, Davidson *et al.*, *Nature Structure Biology* 2:859 (1995); Clegg, R.M. *et al.*, *Proc. Natl. Acad. Sci. U.S.A.* 90:2994-2998 (1993).

25   The " midpoint temperature, T_m" is the temperature midpoint of a thermal denaturation curve. The T_m can be readily determined using methods well known to those skilled in the art. See, for example, Weber, P. C. et al., J. Am. Chem. Soc. 116:2717-2724 (1994); Clegg, R.M. et al., Proc. Natl. Acad. Sci. U.S.A. 90:2994-2998 (1993).

30   The term "fluorescence probe molecule" refers to a fluorophore, which is a fluorescent molecule or a compound which is capable of binding to an unfolded

or denatured receptor and, after excitement by light of a defined wavelength, emits fluorescent energy. The term fluorescence probe molecule encompasses all fluorophores. More specifically, for proteins, the term encompasses fluorophores such as thioinosine, and N-ethenoadenosine, formycin, dansyl derivatives, fluorescein derivatives, 6-propionyl-2-(dimethylamino)-napthalene (PRODAN), 2-anilinonapthalene, and N-arylamino-naphthalene sulfonate derivatives such as 1-anilinonaphthalene-8-sulfonate (1,8-ANS), 2-anilinonaphthalene-6-sulfonate (2,6-ANS), 2-aminonaphthalene-6-sulfonate, N,N-dimethyl-2-aminonaphthalene-6-sulfonate, N-phenyl-2-aminonaphthalene, N-cyclohexyl-2-aminonaphthalene-6-sulfonate, N-phenyl-2-aminonaphthalene-6-sulfonate, N-phenyl-N-methyl-2-aminonaph-thalene-6-sulfonate, N-(o-toluyl)-2-aminonaphthalene-6-sulfonate, N-(m-toluyl)-2-aminonaphthalene-6-sulfonate, N-(p-toluyl)-2-aminonaphthalene-6-sulfonate, 2-(p-toluidinyl)-naphthalene-6-sulfonic acid (2,6-TNS), 4-(dicyanovinyl) julolidine (DCVJ), 6-dodecanoyl-2-dimethylaminonaphthalene (LAURDAN), 6-hexadecanoyl-2-(((2-(trimethylammonium)ethyl)methyl)amino)naphthalenechloride(PATMAN), nile red, N-phenyl-1-naphthylamine, 1,1-dicyano-2- [6-(dimethylamino) naphthalen-2-yl]propene (DDNP), 4,4'-dianilino-1,1-binaphthyl-5,5-disulfonic acid (bis-ANS), and Dapoxyl™ derivatives (Molecular Probes, Eugene, OR). Preferably for proteins, the term refers to 1,8-ANS or 2,6-TNS.

A double-stranded oligonucleotide may be used in fluorescence resonance energy transfer assays. One strand of the oligonucleotide will contain the donor fluorophore. The other strand of the oligonucleotide will contain the acceptor fluorophore. For a nucleic acid to "contain" a donor or an acceptor fluorophore, the fluorophore can be incorporated directly into the oligonucleotide sequence. Alternatively, the fluorophore can be attached to either the 5'- or 3'-terminus of the oligonucleotide.

A donor fluorophore is one which, when excited by light, will emit fluorescent energy. The energy emitted by the donor fluorophore is absorbed by the acceptor fluorophore. The term "donor fluorophore" encompasses all fluorophores including, but not limited to, carboxyfluorescein,

-28-

iodoacetamidofluorescein, and fluorescein isothiocyanate. The term "acceptor fluorophore" encompasses all fluorophores including, but not limited to, iodoacetamidoeosin and tetramethylrhodamine.

The term "carrier" encompasses a platform or other object, of any shape, which itself is capable of supporting at least two containers. The carrier can be made of any material, including, but not limited to glass, plastic, or metal. Preferably, the carrier is a multiwell microplate. The terms microplate and microtiter plate are synonymous. The carrier can be removed from the heating element. In the present invention, a plurality of carriers are used. Each carrier holds a plurality of containers.

The term "biochemical conditions" encompasses any component of a physical, chemical, or biochemical reaction. Specifically, the term refers to conditions of temperature, pressure, protein concentration, pH, ionic strength, salt concentration, time, electric current, potential difference, concentrations of cofactor, coenzyme, oxidizing agents, reducing agents, detergents, metal ion, ligands, or glycerol.

The term "denatured protein" refers to a protein which has been treated to remove secondary, tertiary, or quaternary structure. The term "native protein" refers to a protein which possesses the degree of secondary, tertiary or quaternary structure that provides the protein with full chemical and biological function. A native protein is one which has not been heated and has not been treated with denaturation agents or chemicals such as urea.

The term "denatured nucleic acid" refers to a nucleic acid which has been treated to remove folded, coiled, or twisted structure. Denaturation of a triple-stranded nucleic acid complex is complete when the third strand has been removed from the two complementary strands. Denaturation of a double-stranded DNA is complete when the base pairing between the two complementary strands has been interrupted and has resulted in single-stranded DNA molecules that have assumed a random form. Denaturation of single-stranded RNA is complete when intramolecular hydrogen bonds have been interrupted and the RNA has assumed a random, non-hydrogen bonded form.

The terms "folding," "refolding," and "renaturing" refer to the acquisition of the correct secondary, tertiary, or quaternary structure, of a protein or a nucleic acid, which affords the full chemical and biological function of the biomolecule.

The term "efficacy" refers to the effectiveness of a particular set of biochemical conditions in facilitating the refolding or renaturation of an unfolded or denatured protein.

The terms "spectral measurement" and "spectrophotometric measurement" refer to measurements of changes in the absorption of light. Turbidity measurements, measurements of visible light absorption, and measurement of ultraviolet light absorption are examples of spectral measurements.

The term "polarimetric measurement" relates to measurements of changes in the polarization properties of light and fluorescent emission. Circular dichroism and optical rotation are examples of polarization properties of light which can be measured polarimetrically. Measurements of circular dichroism and optical rotation are taken using a spectropolarimeter. "Nonpolarimetric" measurements are those that are not obtained using a spectropolarimeter.

The term "collection" refers to a pool or a group of at least one molecule to be tested for binding to a target molecule or receptor.

A "host" is a bacterial cell that has been transformed with recombinant DNA for the purpose of expressing protein which is heterologous to the host bacterial cell.

The thermal shift assay is based on the ligand-dependent change in the thermal denaturation curve of a receptor, such as a protein or a nucleic acid. When heated over a range of temperatures, a receptor will unfold. By plotting the degree of denaturation as a function of temperature, one obtains a thermal denaturation curve for the receptor. A useful point of reference in the thermal denaturation curve is the temperature midpoint (T_m), the temperature at which the receptor is half denatured.

Ligand binding stabilizes the receptor (Schellman, J., Biopolymers 14:999-1018 (1975)). The extent of binding and the free energy of interaction follow parallel courses as a function of ligand concentration (Schellman, J.,

-30-

Biophysical Chemistry 45:273-279 (1993); Barcelo, F. et al., Chem. Biol.
Interactions 74:315-324 (1990)). As a result of stabilization by ligand, more
energy (heat) is required to unfold the receptor. Thus, ligand binding shifts the
thermal denaturation curve. This property can be exploited to determine whether
a ligand binds to a receptor: a change, or "shift", in the thermal denaturation
curve, and thus in the T_m, suggests that a ligand binds to the receptor.

The thermodynamic basis for the thermal shift assay has been described
by Schellman, J.A. (*Biopolymers 15*:999-1000 (1976)), and also by Brandts *et al.*
(Biochemistry 29:6927-6940 (1990)). Differential scanning calorimetry studies
by Brandts et al., (Biochemistry 29:6927-6940 (1990)) have shown that for tight
binding systems of 1:1 stoichiometry, in which there is one unfolding transition,
one can estimate the binding affinity at T_m from the following expression:

$$K_L^{T_m} = \frac{\exp\left\{-\frac{\Delta H_u^{T_0}}{R}\left[\frac{1}{T_m} - \frac{1}{T_0}\right] + \frac{\Delta C_{pu}}{R}\left[\ln\left(\frac{T_m}{T_0}\right) + \frac{T_0}{T_m} - 1\right]\right\}}{[L_{T_m}]} \qquad \text{(equation 1)}$$

where $K_L^{T_m}$ = the ligand association constant at T_m ;

T_m = the midpoint for the protein unfolding transition in the presence of ligand;

T_0 = the midpoint for the unfolding transition in the absence of ligand;

$\Delta H_u^{T_0}$ = the enthalpy of protein unfolding in the absence of ligand at T_0 ;
ΔC_{pu} = the change in heat capacity upon protein unfolding in the absence of
         ligand;

$[L_{T_m}]$ = the free ligand concentration at T_m ; and

R = the gas constant.

The parameters ΔH_u and ΔC_{pu} are usually observed from differential
scanning calorimetry experiments and are specific for each receptor. To calculate
the binding constant from equation 1, one should have access to a differential
scanning calorimetry instrument to measure ΔH_u and ΔC_{pu} for the receptor of

interest. One can also locate these parameters for the receptor of interest, or a receptor closely related to it, in the literature. In these situations, equation (1) will allow the accurate measurement of K_L at T_m.

It is also possible to calculate the ligand association constant at any temperature, K_L at T, using equation 2. To use equation 2, calorimetry data for the binding enthalpy at T, ΔH_L, and the change of heat capacity upon ligand binding, ΔC_{pL} must be known (Brandts *et al.*, *Biochemistry 29*:6927-6940 (1990)).

$$K_L^T = K_L^{T_m} \exp\left\{-\frac{\Delta H_L^T}{R}\left[\frac{1}{T} - \frac{1}{T_m}\right] + \frac{\Delta C_{pL}}{R}\left[\ln\left(\frac{T}{T_m}\right) - \frac{T}{T_m} + 1\right]\right\} \quad \text{(equation 2)}$$

where K_L^T = the ligand association constant at any temperature T ;

$K_L^{T_m}$ = the ligand association constant at T_m ;

T_m = the midpoint for the protein unfolding transition in the presence of ligand;

ΔH_L^T = the enthalpy of ligand binding in the absence of ligand at T ;

ΔC_{pL} = the change in heat capacity upon binding of ligand; and

R = the gas constant.

The second exponential term of equation 2 is usually small enough to be ignored so that approximate values of K_L at T can be obtained using just the first exponential term:

$$K_L^T = K_L^{T_m} \exp\left\{-\frac{\Delta H_L^T}{R}\left[\frac{1}{T} - \frac{1}{T_m}\right]\right\} \quad \text{(equation 3)}$$

One need not, however, calculate binding constants according to equations 1-3 in order to rank the affinities of a multiplicity of different ligands for a receptor. Rather, the present invention provides a method for ranking affinities of ligands according to the degree to which the thermal denaturation curve is

shifted by the ligand. Thus, it is possible to obtain estimates of K_L at T_m, even in the absence of accurate values of ΔH_u, ΔC_{pu}, and ΔH_L.

The present invention is particularly useful for screening a combinatorial or a compound library. To achieve high throughput screening, it is best to house samples on a multicontainer carrier or platform. A multicontainer carrier facilitates the heating of a plurality of samples simultaneously. In one embodiment, a multiwell microplate, for example a 96 or a 384 well microplate, which can accommodate 96 or 384 different samples, is used as the carrier.

In one embodiment, one sample is contained in each well of a multi-well microplate. The control well contains receptor, but no molecule to be tested for binding. Each of the other samples contains at least one molecule to be tested for binding. The thermal denaturation curve for the receptor in the control well is the curve against which curves for all of the other experiments are compared.

The rate of screening is accelerated when the sample contains more than one molecule to be tested for binding. For example, the screening rate is increased 20-fold when the sample contains a pool of 20 molecules. Samples which contain a binding molecule must then be divided into samples containing a smaller collection of molecules to be tested for binding. These divided collections must then be assayed for binding to the target molecule. These steps must be repeated until a single molecule responsible for the original thermal shift is obtained.

Receptor denaturation can be measured by light spectrophotometry. When a protein in solution denatures in response to heating, the receptor molecules aggregate and the solution becomes turbid. Thermally induced aggregation upon denaturation is the rule rather than the exception. Aggregation generally complicates calorimetric experiments. Aggregation, however, is an advantage when using a spectrophotometric technology, because changes in turbidity can be measured by monitoring the change in absorbance of visible or ultraviolet light of a defined wavelength.

Denaturation of a nucleic acid can be monitored using light spectrophotometry. The change in hyperchromicity, which is the increase in

absorption of light by polynucleotide solutions due to a loss of ordered structure, is monitored as a function of increase in temperature. Changes in hyperchromicity is typically assayed using light spectrophotometry.

In another embodiment, however, fluorescence spectrometry is used to monitor thermal denaturation. The fluorescence methodology is more sensitive than the absorption methodology.

The use of intrinsic protein fluorescence and fluorescence probe molecules in fluorescence spectroscopy experiments is well known to those skilled in the art. See, for example, Bashford, C.L. et al., Spectrophotometry and Spectrofluorometry: A Practical Approach, pp. 91-114, IRL Press Ltd. (1987); Bell, J.E., Spectroscopy in Biochemistry, Vol. I, pp. 155-194, CRC Press (1981); Brand, L. et al., Ann. Rev. Biochem. 41:843 (1972).

If the target molecule or receptor to be studied is a nucleic acid, fluorescence spectrometry can be performed using an ethidium bromide displacement assay (Lee, M. et al., J. Med. Chem. 36:863-870 (1993)). In this approach, ligand binding displaces ethidium bromide and results in a decrease in the fluorescent emission from ethidium bromide. An alternative approach is to use fluorescence resonance emission transfer. In the latter approach, the transfer of fluorescent energy, from a donor fluorophore on one strand of an oligonucleotide to an acceptor fluorophore on the other strand, is monitored by measuring the emission of the acceptor fluorophore. Denaturation prevents the transfer of fluorescent energy.

The fluorescence resonance emission transfer methodology is well known to those skilled in the art. Fore example, see Ozaki, H. et al., Nucleic Acids Res. 20:5205-5214 (1992); Clegg, R.M. et al., Proc. Natl. Acad. Sci. U.S.A. 90:2994-2998 (1993); Clegg, R. M. et al., Biochemistry 31:4846-4856 (1993).

The element upon which the sample carrier is heated can be any element capable of heating samples rapidly and in a reproducible fashion. In the present invention, a plurality of samples is heated simultaneously. The plurality of samples can be heated on a single heating element. Alternatively, the plurality of samples can be heated to a given temperature on one heating element, and then

moved to another heating element for heating to another temperature. Heating can be accomplished in regular or irregular intervals. To generate a smooth denaturation curve, the samples should be heated evenly, in intervals of 1 or 2°C. The temperature range across which the samples can be heated is from 25 to 110 °C. Spectral readings are taken after each heating step. Samples can be heated and read by the spectral device in a continuous fashion. Alternatively, after each heating step, the samples may be cooled to a lower temperature prior to taking the spectral readings. Preferably, the samples are heated continuously and spectral readings are taken while the samples are being heated.

Spectral readings can be taken on all of the samples in the carrier simultaneously. Alternatively, readings can be taken on samples in groups of at least two at a time. Finally, the readings can be taken one sample at a time.

In one embodiment, thermal denaturation is monitored by fluorescence spectrometry using an assay apparatus such as the one shown in Figure 29. The instrument consists of a scanner and a control software system. The system is capable of quantifying soluble and cell-associated fluorescence emission. Fluorescence emission is detected by a photomultiplier tube in a light-proof detection chamber. The software runs on a personal computer and the action of the scanner is controlled through the software. A precision X-Y mechanism scans the microplate with a sensitive fiber-optic probe to quantify the fluorescence in each well. The microplate and samples can remain stationary during the scanning of each row of the samples, and the fiber-optic probe is then is moved to the next row. Alternatively, the microplate and samples can be moved to position a new row of samples under the fiber-optic probe. The scanning system is capable of scanning 96 samples in under one minute. The scanner is capable of holding a plurality of excitation filters and a plurality of emission filters to measure the most common fluorophores. Thus, fluorescence emission readings can be taken one sample at a time, or on a subset of samples simultaneously. An alternate embodiment of the assay apparatus is shown in Figure 33. The assay apparatus of the present invention will be described in more detail below.

The present invention is also directed to a product of manufacture which comprises a carrier having a multiplicity of containers within it. The product of manufacture can be used to screen a combinatorial library for lead compounds which bind to the receptor of interest. The combinatorial library can be screened using the method according to the present invention.

In the product of manufacture, each of the containers contains a uniform amount of a receptor of interest. In addition, each of these containers contains a different compound from a combinatorial library at a concentration which is at least 2-fold above the concentration of the receptor. Preferably, the product of manufacture is a multiwell microplate or a multiplicity of multiwell microplates. If the receptor is a protein, each container may further contain a fluorescence probe molecule. If the receptor is a nucleic acid, each container may further contain ethidium bromide. Alternatively, the nucleic acid may be labeled with a fluorophore.

Prior to use, the product of manufacture can be stored in any manner necessary to maintain the integrity of the receptor of interest. For example, the product of manufacture can be stored at a temperature between -90°C and room temperature. The receptor and compound can be stored in lyophilized form, in liquid form, in powdered form, or can be stored in glycerol. The product of manufacture may be stored either in the light or in the dark.

The heat conducting element or block upon which the sample carrier is heated can be any element capable of heating samples rapidly and reproducibly. The plurality of samples can be heated on a single heating element. Alternatively, the plurality of samples can be heated to a given temperature on one heating element, and then moved to another heating element for heating to another temperature. Heating can be accomplished in regular or irregular intervals. To generate a smooth denaturation curve, the samples should be heated evenly, in intervals of 1 or 2°C. The temperature range across which the samples can be heated is from 25 to 110°C.

In the present invention, a plurality of samples is heated simultaneously. If samples are heated in discrete temperature intervals, in a stairstep fashion,

spectral readings are taken after each heating step. Alternatively, after each heating step, the samples may be cooled to a lower temperature prior to taking the spectral readings. Alternatively, samples can be heated in a continuous fashion and spectral readings are taken during heating.

Spectral readings can be taken on all of the samples on a carrier simultaneously. Alternatively, readings can be taken on samples in groups of at least two at a time.

The present invention also provides an improved method for generating lead compounds. After a compound or a combinatorial library of compounds has been screened using the thermal shift assay, compounds which bind to the target receptor are chemically modified to generate a second library of compounds. This second library is then screened using the thermal shift assay. This process of screening and generating a new library continues until compounds that bind to the target receptor with affinities in the K_d range of from 10^{-4} to 10^{-15} M are obtained.

A fluorescence emission imaging system can be used to monitor the thermal denaturation of a target molecule or a receptor. Fluorescence emission imaging systems are well known to those skilled in the art. For example, the AlphaImager™ Gel Documentation and Analysis System (Alpha Innotech, San Leandro, CA) employs a high performancd charge coupled device camera with 768 x 494 pixel resolution. The charge coupled device camera is interfaced with a computer and images are anlayzed with Image analysis software™. The ChemiImager™ (Alpha Innotech) is a cooled charge coupled device that performs all of the functions of the AlphaImager™ and in addition captures images of chemiluminescent samples and other low intensity samples. The ChemiImager™ charge coupled device includes a Pentium processor (1.2 Gb hard drive, 16 Mb RAM), AlphaEase™ analysis software, a light tight cabinet, and a UV and white light trans-illuminator. For example, the MRC-1024 UV/Visible Laser Confocal Imaging System (BioRad, Richmond, CA) facilitates the simultaneous imaging of more than one fluorophore across a wide range of illumination wavelengths (350 to 700 nm). The Gel Doc 1000 Fluorescent Gel Documentation System

(BioRad, Richmond, CA) can clearly display sample areas as large as 20 x 20 cm, or as small as 5 x 4 cm. At least two 96 well microplates can fit into a 20 x 20 cm area. The Gel Doc 1000 system also facilitates the performance of time-based experiments.

A fluorescence thermal imaging system can be used to monitor receptor unfolding in a microplate thermal shift assay. In this embodiment, a plurality of samples is heated simultaneously between 25 to 110°C. A fluorescence emission reading is taken for each of the plurality of samples simultaneously. For example, the fluorescence emission in each well of a 96 or a 384 well microplate can be monitored simultaneously. Alternatively, fluorescence emission readings can be taken continuously and simultaneously for each sample. At lower temperatures, all samples display a low level of fluorescence emission. As the temperature is increased, the fluorescence in each sample increases. Wells which contain ligands which bind to the target molecule with high affinity shift the thermal denaturation curve to higher temperatures. As a result, wells which contain ligands which bind to the target molecule with high affinity fluoresce less, at a given temperature above the T_m of the target molecule in the absence of any ligands, than wells which do not contain high-affinity ligands. If the samples are heated in incremental steps, the flourescence of all of the plurality of samples is simultaneoulsy imaged at each heating step. If the samples are heated continuously, the fluorescent emission of all of the plurality of samples is simultaneously imaged during heating.

A thermal shift assay can be performed in a volume of 100 μL volumes. For the following reasons, however, it is preferable to perform a thermal shift assay in a volume of 10 μL. First, approximately 10-fold less protein is required for the miniaturized assay. Thus, only ~ 5 to 40 pmole of protein are required (0.1 μg to 1.0 μg for a 25 kDa protein) for the assay (i.e. 5 to 10 μL working volume with a target molecule concentration of about 1 to about 4 μM). Thus, 1 mg of protein can be used to conduct 1,000 to 10,000 assays in the miniaturized format. This is particularly advantageous when the target molecule is available in minute quantities.

Second, approximately 10-fold less ligand is required for the miniaturized assay. This advantage is very important to researchers when screening valuable combinatorial libraries for which library compounds are synthesized in minute quantities. In the case of human α-thrombin, the ideal ligand concentration is about 50 μM, which translates into 250 pmoles of ligand, or 100 ng (assuming a MW of 500 Da) of ligand per assay in the miniaturized format.

Third, the smaller working volume allows the potential of using larger arrays of assays because the miniaturized assay can fit into a much smaller area. For example, a 384 well (16 x 24 array) or 864 well (24 x 36 array) plates have roughly the same dimensions as the 96 well plates (about 8.5 x 12.5 cm). The 384 well plate and the 864 well plate allows the user to perform 4 and 9 times as many assays, respectively, as can be performed using a 96 well plate. Alternatively, 1536 well plates (32 x 48 arrays; Matrix Technologies Corp.) can be used. A 1536 well plate will facilitate sixteen times the throughput afforded by a 96 well plate.

Thus, using the 1536 well plate configuration, the assay speed can be increased by about 16 times, relative to the speed at which the assay can be performed using the 96 well format. The 8 x 12 assay array arrangement (in a 96-well plate) facilitates the performance of 96 assays/hr, or about 2300 assays/24 hours. The 32 x 48 array assay arrangement facilitates the performance of about 1536 assays hr., or about 37,000 assays/24 hours can be performed using a 32 x 48 assay array configuration.

The assay volume can be 1-100 μL. Preferably, the assay volume is 1-50 μL. More preferably, the assay volume is 1-25 μL. More preferably still, the assay volume is 1-10 μL. More preferably still, the assay volume is 1-5 μL. More preferably still, the assay volume is 5 μL. Most preferably, the assay volume is 1 μL or 2 μL.

Preferably, the assay is performed in V-bottom polycarbonate plates or polycarbonate dimple plates. A dimple plate is a plate that contains a plurality of round-bottom wells that hold a total volume of 15 μL.

One alternative to taking spectral readings over a temperature range around the T_m of the therapeutic target to obtain a full thermal unfolding curve for the ligand/target complex, in order to identify shifts in T_m, is to perform the assay at a single temperature near the T_m of the target molecule. In this embodiment,
5   samples that emit less fluorescence, relative to a control sample (containing a target molecule, but no candidate ligand) indicate that the candidate ligand binds to the target molecule.

In this embodiment, the magnitude of a physical change associated with the thermal denaturation of a target molecule resulting from heating is determined
10   by generating a thermal denaturation curve for the target molecule as a function of temperature over a range of one or more discrete or fixed temperatures. The physical change associated with thermal denaturation, for example, fluorescence emission, is measured. The magnitude of the physical change at the discrete or fixed temperature for the target molecule in the absence of any ligand is noted.
15   The magnitude of the physical change in the presence of each of a multiplicity of different molecules, for example, combinatorial compounds, is measured. The magnitude of the physical change associated with thermal denaturation of the target molecule in the presence of each of the multiplicity of molecules is compared to magnitude of the physical change obtained for the target molecule
20   at the discrete or fixed temperature in the absence of any of the multiplicity of different molecules. The affinities of the multiplicity of different molecules are ranked according to the change in the magnitude of the physical change.

The discrete or fixed temperature at which the physical change is measure can be any temperature that is useful for discriminating shifts in thermal stability.
25   Preferably, the discrete or fixed temperature is the midpoint temperature T_m for the thermal denaturation curve for the target molecule in the absence of any of the multiplicity of different molecules tested for binding to the target molecule.

The single temperature configuration is particularly advantageous if one is interested in assaying a series of relatively high affinity ligands, which are the
30   preferred compounds for candidates in clinical testing. In cases where a less stringent requirement for binding affinity is preferred, however, one may increase

the ligand concentration to 500 μM in order to identify ligands with K_d's of 2.5 μM or higher affinity.

The single temperature embodiment offers a number of advantages. First, assay speed is increased by a factor of ten fold. Thus, as the 96 well plate (8 x 12 array) assay facilitates about 96 assays per hour, the single temperature variation will facilitate about 1000 assays per hr. Using a 1536 well plate (32 x 48 array), as long as sample aliquoting can be effected at the same rate for the 32 x 48 array system as in the 8 x 12 array system, about 15,000 assays can be performed per hour.

Another alternative method for detecting the thermal unfolding transitions for the microplate thermal shift assay is through the intrinsic tryptophan (Trp) fluorescence of the target protein. Most fluorescence emission plate readers, such as the CytoFluor II, use tungsten-halogen lamps as their light source. These lamps do not give off enough light near 280 nm to allow excitation of the intrinsic Trp residues of proteins which absorb maximally near 280 nm. However, the Biolumin 960 (Molecular Dynamics) uses a Xenon-Arc lamp. The Xenon-Arc lamp affords excitation at 280 nm and the measurement of emission at 350 nm.

The methods and assay apparatus of the present invention are not limited to assaying ligand-protein interactions. The methods and the assay apparatus can be used to rapidly assay any multi-variable system related to protein stabilization. For example, the methods and the assay apparatus of the present invention can be used to simultaneously assay the binding of more than one compound or ligand to a target molecule. Using this approach, the additive effect of multiple-ligand binding can be assessed. Positive and negative cooperativity can be determined. To accomplish this method, thermal shift assays are performed for a target molecule, such as a protein, in the absence of any ligands, in the presence of a single ligand, and in the presence of two or more ligands. A thermal denaturation curve is generated for the protein alone and for each combination of protein and ligand(s). The midpoint temperature T_m is then determined for each curve. Each T_m is then compared to each of the other T_m's for the other curves. Alternatively, each entire thermal denaturation curve is compared to each of the other thermal

denaturation curves. In either of these manners, the additive contribution of more than one ligand to binding interaction or to protein stability can be determined.

In a similar fashion, the additive contributions of one or more biochemical conditions to protein stability can be determined. Thus, the present invention can be used to rapidly identify biochemical conditions that optimize protein stabililty, and hence shelf-life. of a protein.

Further, the methods and the assay apparatus of the present invention can be used to rank the efficacies of various biochemical conditions for refolding or renaturing an unfolded or denatured protein. This embodiment addresses the need in the art for a reliable method for screening for effective refolding or renaturing conditions.

For example, expression of recombinant DNA in a bacterial cell usually results in the sequestration of recombinant protein into bacterial inclusion bodies (Marston, F.A.O., Biochem. J. 240:1-12 (1986)). Although other expression systems can be used instead of bacterial expression systems, expression in bacterial cells remains the method of choice for the high-level production of recombinant proteins (Rudolph, R., Protein Engineering: Principles and Practices, pp. 283-298, John Wiley & Sons (1995)). In many cases, recovery of recombinant protein requires that protein be isolated from inclusion bodies. Protein purification from inclusion bodies process necessitates the denaturation of recombinant protein. As a result, recombinant protein must be renatured or refolded under conditions suitable to generate the protein in its native, fully functional form.

In each of these cases, denatured protein must be renatured or refolded in order to be useful for further study or use. Unfortunately, one cannot easily predict the exact conditions under which a given protein or fragment of the protein should be renatured. Each protein is different. One must always resort to testing a number of different combinations of renaturing conditions before one can know which set of conditions is optimal. Thus, it is desirable to have a reliable and rapid method for ranking the efficacies of various renaturing conditions.

Recombinant DNA technology has allowed the biosynthesis of a wide variety of heterologous polypeptides of interest in relatively large quantities through the recruitment of the bacterial protein expression apparatus. However, the promise of cheap and abundant supplies of correctly folded rare human proteins of high therapeutic value expressed in *E. coli* has foundered due to the overwhelmingly predominant aggregation of unfolded or partially unfolded target proteins into insoluble protein inclusion bodies. For recent reviews, see Rudolph, R., & Lilie, H., *FASEB J. 10*:49-56 (1995); Sadana, A., *Biotechnology & Bioengineering 48*:481-489 (1995); Jaenicke, R., *Phil. Trans. Royal Soc. London Ser. B-Biol. Sci. 348*:97-105 (1995)). Reasons for the prevailing self aggregation reaction in *E. coli* have centered on the relatively high concentration of the heterologous protein (as high as 30% of the weight of the cell) found to various degrees in partially unfolded states. Thus, at the elevated protein concentrations of an overexpressing *E. coli* strain, the exposed hydrophobic residues of unfolded proteins are more likely to encounter other molecules with similarly exposed groups (inter-molecular reaction) than they are to sample self collapsed polypeptide conformations where these hydrophobic residues are packed in a proper orientation (intra-molecular transition state) for proceeding to the fully folded native state (see Figure 26). From this perspective, the insoluble protein inclusion bodies are seen as kinetically trapped side reaction products that thwart the preferred protein folding process.

Techniques for isolating inclusion bodies, purifying recombinant protein from inclusion bodies, and techniques for refolding or renaturing protein are well known to those skilled in the art. For example, see Sambrook, J. et al., Molecular Cloning: a Laboratory Manual, pp. 17.37-17.41, Cold Spring Harbor Laboratory Press (1989); Rudolph, R. et al., FASEB J. 10:49-56 (1995).

Another impediment to producing large quantities of correctly folded proteins in *E. coli* is that the reducing redox potential of the *E. coli* cytosol impedes the formation of disulfide bonds *in vivo*. The formation of disulfide bonds is an important co- and post-translational event in the biosynthesis of many extracellular proteins that is often coupled to protein folding. In addition, the cis-

trans proline isomerization reaction has been demonstrated to be a rate determining step for correct folding of certain proteins (Lin, L.-N., & Brandts, J.F., *Biochemistry 22*:564-573 (1983)). As a result, partially folded intermediates accumulate in sufficient quantity *in vivo* that they aggregate and precipitate into protein masses.

Cells employ a class of host proteins called molecular chaperonins that assist *in vivo* protein folding by apparently preventing many of the unproductive side reactions discussed above with regard to inclusion body formation, i.e. aggregation and improper disulfide bond formation. However, the *E. coli* chaperonin machinery, which is comprised in part by the proteins, GroEL and GroES, presumably becomes overwhelmed by massive overexpression. Despite many attempts to correct this chaperonin deficit by co-expression of molecular chaperonins with the protein of interest (Rudolph, R., & Lilie, H., The FASEB J. 10:49-56 (1995)) positive results have been reported in only one case (Goloubinoff, P., *et al., Nature 342*:884-889 (1989)).

Two hypotheses have been promoted to explain how GroEL and GroES assist *in vivo* protein folding. Under the first hypothesis, the Anfinsen cage hypothesis, the function of a molecular chaperonin is to provide a protected environment where folding of the protein to its native state can proceed without interference by pro-aggregation conditions in the cell (Martin, *et al., Nature 352*:36-42 (1991); Ellis, R.J., *Current Biology 4*:633-635 (1994)). Under the second hypothesis, the "iterative annealing" hypothesis, the function of the chaperonin is to partly unfold misfolded proteins (that is, kinetically trapped intermediates) with some of the energy of ATP hydrolysis being channeled into the conformational energy of the substrate polypeptide, forcing the polypeptide into a higher energy state from which it could once again attempt to refold correctly after being released into solution (Todd, M.J. *et al., Science 265*:659-666 (1994); Jackson, *et al., Biochemistry 32*:2554-2563 (1993); Weissman, J.S., *et al., Cell 78*:693-702 (1994); Weissman, J.S., & Kim, P.S., *Science 253*:1386-1393 (1991)).

The *in vivo* results discussed above are in many ways consistent with the more recent experiences with *in vitro* refolding of recombinant heterologous proteins expressed in *E. coli*. That is, while the primary amino acid sequence of a protein may contain sufficient information to determine its native folded conformation (Anfinsen, C.B., *Science 181*:223-230 (1973)), the biochemical conditions in which the folding reaction takes place can strongly influence the partitioning between unfolded, aggregated, and correctly folded forms.

For example, pH can be understood to influence the folding reaction by its effect on the long range electrostatic interactions summed in the fourth term of the equation (4).

$$\Delta G_{fold} = \Delta G_{conf} + \sum \Delta g_{i,int} + \sum \Delta g_{i,s} + \Delta W_{el} + (\Delta G_{bind}) \qquad \text{Equation (4)}$$

where ΔG_{conf} = conformational free energy (order/disorder term);

$\Delta g_{i,int}$ = short range interactions (H-bonds, van der Walls interactions, salt bridges, cofactor binding, etc.);

$\Delta g_{i,s}$ = short range interactions with solvent (hydrophobic effect, hydration of ions, etc.); and

ΔW_{el} = long range electrostatic interactions.

ΔG_{bind} = ligand binding free energy

As the pH of a protein solution is lowered below the pI for the protein, functional groups on the polypeptide become increasingly protonated, to the point where the electrostatic repulsion between functional groups eventually out balances the other terms in the free energy equation (equation (4)), and the protein is no longer able to adopt the native conformation.

Another important biochemical parameter for protein folding is the solvent, water, which repels aliphatic and aromatic side chains (and possibly the main chain to some extent) to minimize their exposed surface area. The influence of solvent over the folding reaction is summed in the third term of the free energy equation (equation (4)). Certain salts are known to increase the hydrophobic interaction among protein side chains in water solutions. The effect depends

upon the nature of the ions following the Hofmeister series: Cations: $Mg^{2+} > Li^+$ $> Na + > K^+ > NH_4^+$. Anions: $SO_4^{2-} > HPO_4^{2-} >$ acetate $>$ citrate $>$ tartrate $>$ Cl$^-$ $> NO_3^- -> ClO_3^- > I^- > ClO_4^- > SCN^-$. Stabilizing Hofmeister anions, such as SO_4^{2-} and HPO_4^{2-} at 0.4 M have been found to increase the yield of correctly folded

5   proteins (Creighton, T.E., In: *Proteins: Structures and Molecular Properties*, Freeman, New York, (1984)). This favorable outcome for the native conformation of the protein has been attributed to the cations' and anions' "salting out" effect which leads to the preferential hydration of the protein (Creighton, T.E., In: *Proteins: Structures and Molecular Properties*, Freeman, New York,

10   (1984)).

         Glycerol alters the solvation properties of water to favor the native conformation of proteins. The mechanism by which this occurs is the co-solvent exclusion and preferential hydration of the protein, not unlike the effect of salts of the salts of the Hofmeister series (Timasheff & Arakawa, In: *Protein Structure,*

15   *A Practical Approach*, T.E. Creighton, ed., IRL Press, Oxford, UK (1989), pp. 331-354).

         Another example of how the environment influences protein folding is the effect that known ligands and cofactors have on the yield of folded protein. Ligand binding has the effect of shifting the equilibrium from an unfolded state

20   to a native-ligand complex through a coupling of the binding free energy to that of the folding reaction. The role of metal ions in the refolding of bovine carbonic anhydrase II has been described (Bergenhem & Carlsson, *Biochim. Biophys. Acta* *998*:277-285 (1989)). Other biochemical parameters that have been shown to affect protein folding are: protein concentration, temperature, glutathione redox

25   buffers (GSH, GSSG), the presence of detergents, and the presence of other additives, such as glycerol, arginine-HCl, polyethylene glycol (PEG), and organic solvents.

         During incubation under refolding conditions, recombinant proteins can be immobilized to solid phase support. This configuration resembles the

30   "Anfinsen cage" hypothesis for the function of GroEL and GroES where an unfolded protein becomes temporarily immobilized in a protected environment

where folding to the native state can proceed without interference from competing aggregation reactions. Confirmation of protein folding on solid supports has now come from two recent reports in the literature. A poly-histidine tagged TIMP-2 protein could be refolded by dialysis while still bound to a metal chelate column (Negro, A. *et al., FEBS Lett. 360*:52-56 (1995)). A polyionic fusion peptide attached to the amino or carboxyl terminus of α-glucosidase allowed folding while bound to heparin-Sepharose resin at about 5 mg/mL (Rudolph & Lilie, *FASEB J. 10*:49-56 (1995)). A polyionic arginine tag metholdology for immobilizing and refolding α-glucosidase is disclosed in Stempfer, G. *et al., Nature Biotechnology 14*:329-334 (1996).

In the present invention, the thermal shift assay is used to rank the efficacy of various refolding or renaturing conditions. Each of a multiplicity of aliquots of a protein of interest, which has been incubated under a variety of different biochemical folding conditions, are placed in a container in a multicontainer carrier. An aliquot of the native, fully functional protein of known concentration is placed in the control container. The samples can be placed in any multicontainer carrier. Preferably, each sample can be placed in a well of a multiwell microplate.

In considering the many biochemical variables that can influence the outcome of the protein folding reaction, optimization of protein folding is a multi-variable optimization problem, not unlike protein crystallization and quantitative structure activity relationships (QSAR) in drug discovery. Multi-variable optimization problems require large numbers of parallel experiments to collect as much data as possible in order to influence a favorable response. In this regard, both protein crystallization and QSAR analyses have greatly benefited from mass screening protocols that employ matrix arrays of incremental changes in biochemical or chemical composition.

The present invention can be used to rank the efficacies of refolding or renaturing conditions. Such conditions include, but are not limited to, the concentration of glycerol, the concentration of protein, the use of agents which catalyze the formation of disulfide bond formation, temperature, pH, ionic

strength, type of solvent, the use of thiols such as reduced glutathione (GSH) and oxidized glutathione (GSSG), chaotropes such as urea, guanidinium chlorides, alkyl-urea, organic solvents such as carbonic acid amides, L-arginine HCl, Tris buffer, polyethylene glycol, nonionic detergents, ionic detergents, zwitterionic detergents, mixed micelles, and a detergent in combination with cyclodextrin. The present invention can be used regardless of whether a denaturation agent is removed from the protein using dialysis, column chromatographic techniques, or suction filtration.

Using a spectral thermal shift assay, the conditions which facilitate optimal protein refolding can be determined rapidly. In this embodiment, the renatured protein samples and a control protein sample (i.e., a sample of native protein in its fully functional form) are heated over a temperature range. At discrete temperature intervals, a spectral reading is taken. Alternatively, spectral readings can be taken during a continuous, pre-determined temperature profile. A thermal denaturation curve is constructed for each sample. The T_m for the thermal denaturation curve of the native, fully functional protein is determined. The relative efficacies of the refolding conditions are ranked according to the magnitude of the physical change associated with unfolding at the T_m of the native, fully functional protein, relative to the magnitude of the physical change of a known quantity of the native, fully functional protein at that T_m. The magnitude of physical change used to measure the extent of unfolding (reflected on the ordinate, or y-axis, of a thermal denaturation curve) corresponds to the amount of correctly folded protein.

The present invention provides a method for screening biochemical conditions that facilitate and optimize protein folding. To screen conditions for a given protein, it is first necessary to determine the thermal unfolding profile for a protein of interest. This is accomplished by generating a denaturation curve using the microplate thermal shift assay. Various conditions can be optimized, including pH optimum, ionic strength dependence, concentration of salts of the Hofmeister series, glycerol concentration, sucrose concentration, arginine concentration, dithiothreitol concentration, metal ion concentration, etc.

Using the microplate thermal shift assay, one can determine one or more biochemical conditions have an additive effect on protein stability. Once a set of biochemical conditions that facilitate an increase in protein stability have been identified using the thermal shift assay, the same set of conditions can be used in protein folding experiments with recombinant protein. See Figure 27. If the conditions that promote protein stability in the thermal shift assay correlate with conditions that promote folding of recombinant protein, conditions can be further optimized by performing additional thermal shift assays until a combination of stabilizing conditions that result in further increase protein stability are identified. Recombinant protein is then folded under those conditions. This process is repeated until optimal folding conditions are identified. Protein stability is expected to correlate with improved yields of protein folding. Yield of correctly folded protein can be determined using any suitable technique. For example, yield of correctly folded protein can be calculated by passing refolded protein over an affinity column, for example, a column to which a ligand of the protein is attached, and quantifying the amount of protein that is present in the sample. In this way, folding conditions can be assessed for their additive contributions to correct folding. The transition state for the protein folding reaction resembles the native form of the protein more than the denatured form. This has been demonstrated to be the case for may proteins (Fersht, A.R., *Curr. Op. Struct. Biol. 7*:3-9 (1997)).

The methods and the apparatus of the present invention provide a rapid, high throughput approach to screening for combinations of biochemical conditions that favor the protein folding. The method does not require cumbersome and time consuming steps that conventional approaches to protein folding require. For example, using the method of the present invention, it is not necessary to dilute protein to large volumes and low protein concentrations (~10 µg/mL) in order to avoid aggregation problems associated with conventional methods of recombinant protein refolding. Suppression of protein aggregation will allow for screening biochemical parameters that shift the protein folding

equilibrium (between the unfolded and the folded forms of proteins) to the correct native conformation.

Like protein stabilization, protein folding, ligand selection, and drug design, selection of conditions that promote protein crystallization is another multi-variable optimization problem that is solved using the methods and the apparatus of the present invention.

The methods and the assay apparatus of the present invention are also useful for determining conditions that facilitate protein crystallization. The crystallization of molecules from solution is a reversible equilibrium process, and the kinetic and thermodynamic parameters are a function of the chemical and physical properties of the solvent system and solute of interest (McPherson, A., In: *Preparation and Analysis of Protein Crystals*, Wiley Interscience (1982); Weber, P.C., *Adv. Protein Chem.* *41*:1-36 (1991)) 1991). Under supersaturating conditions, the system is driven toward equilibrium where the solute is partitioned between the soluble and solid phase instead of the unfolded and native states. The molecules in the crystalline phase pack in ordered and periodic three dimensional arrays that are energetically dominated by many of the same types of cohesive forces that are important for protein folding, i.e. van der Waals interactions, electrostatic interactions, hydrogen bonds, and covalent bonds (Moore, W.J., In: *Physical Chemistry*, 4th Ed., Prentice Hall, (1972), pp. 865-898).

Thus, in many ways protein crystallization can be viewed as a higher level variation of protein folding where whole molecules are packed to maximize cohesive energies instead of individual amino acid residues. Moreover, for both protein crystallization and protein folding, the composition of the solvent can make very important contributions to the extent of partitioning between the soluble (unfolded) and crystalline (native) forms. The cohesive interactions present in protein macromolecules and the role played by solvent in modulating these interactions for both protein folding and protein crystallization are complex and not fully understood at the present time. In this regard, biochemical

conditions that promote protein stabililty and protein folding also promote protein crystallization.

For example, biochemical conditions that were found to increase the stability of D(II) FGF receptor 1 (Figures 19-24) correlate with the conditions that facilitated the crystallization of x-ray diffraction quality protein crystals. Conditions that were employed to obtain crystals of D(II) FGFR1 protein (Lewankowski, Myslik, Bone, R. Springer, B.A. and Pantoliano, M.W., unpublished results (1997)) are shown in Table 1. Protein crystals were obtained in the pH range 7.4 to 9.2 in the presence of the Hofmeister salt Li_2SO_4 (65 to 72%). These crystallization conditions correlated with the pH optimum of about 8.0 in Figure 23. Other salts of the Hofmeister series such as Na_2SO_4, $(NH_4)_2SO_4$ and Mg_2SO_4 were also found useful as additives for lowering the amount of Li_2SO_4 required as the precipitant. Clearly, these conditions for successful D(II) FGFR1 crystallization correlate closely with the stabilizing conditions that were identified using the microplate thermal shift assay.

Conditions that were identified as facilitating human α-thrombin stabilization also facilitate human α-thrombin protein crystallization. Figures 17A-D and 18 show the results of microplate thermal shift assays of conditions that facilitate human α-thrombin stability. Table 2 contains a summary of the conditions identified by three different investigators that facilitate crystallization of x-ray diffraction quality human α-thrombin crystals (Bode, W., *et al., Protein Sci. 1*:426-471 (1992); Vijayalakshmi, J. *et al., Protein Sci. 3*:2254-22271 (1994); and Zdanov, A. *et al., Proteins: Struct. Funct. Genet. 17*:252-265 (1993)).

The conditions summarized in Table 2 correlate closely with the conditions identified in the microplate thermal shift assay as facilitating human α-thrombin stability. Crystals formed near a pH optimum of about 7.0. Furthermore, there is a clear preference for the presence of 0.1 to 0.5 M NaCl (50% of the conditions) or 0.1 to 0.2 M $NaHPO_4$. This is consistent with the recently discovered Na^+ binding site (Dang *et al., Nature Biotechnology 15*:146-149 (1997)) and microplate thermal shift assay results in Figures 17A-D and 18. All of the human α-thrombin samples described in Table 2 that have yielded good

crystals are complexed with a ligand, thereby further stabilizing the native structure of this protein beyond that acquired from the biochemical conditions.

Table 1. D(II) FGFR1 Crystallization Conditions

Buffer	Precipitant	Additive	Protein Concentration
50 mM Hepes pH 7.4	72% Li2SO4		10 mg/ml (10 mM Hepes pH 7.5)
50 mM Hepes pH 7.4	72% Li2SO4	3.4mM ZnSO4	10 mg/ml (10 mM Hepes pH 7.5)
50 mM Hepes pH 7.4	68% Li2SO4	1% PEG 8000	10 mg/ml (10 mM Hepes pH 7.5)
50 mM Hepes pH 7.4	66% Li2SO4	3.4 mM Na2SO4	10 mg/ml (10 mM Hepes pH 7.5)
50 mM Hepes pH 7.4	66% Li2SO4	5.3 mM (NH4) 2SO4	10 mg/ml (10 mM Hepes pH 7.5)
50 mM Hepes pH 7.4	66% Li2SO4	2.1 mM MgSO4	10 mg/ml (10 mM Hepes pH 7.5)
10 mM Tris Hcl, pH 8.0	65% Li2SO4		10 mg/ml (10 mM Hepes pH 7.5)
20 mM glycine, pH 5.2	68% Li2SO4		10 mg/ml (10 mM Hepes pH 7.5)

Protein crystallization is a slow and tedious process that has historically been the rate determining step for the x-ray diffraction determination of protein and nucleic acid structures. The method and apparatus of the present invention facilitate the rapid, high-throughput elucidation of conditions that promote the stability of a given protein and thus the formation of X-ray quality protein crystals.

When a protein is more stable, it has fewer thermodynamic motions that inhibit packing into a crystal lattice. With fewer motions, the protein fits better into a crystal lattice. Using conventional crystallization methods, crystallization experiments are set up at room temperature for weeks at a time. Over time, protein unfolding occurs. Using the methods of the present invention, conditions that stabilize a protein are examined over a temperature range. Conditions that shift the thermal unfolding curve to higher temperature will lower extent of unfolding that occurs while the crystallization process occurs.

-52-

Table 2

Crystallization Conditions

Human α-thrombin Complex	Buffer	Salt	Precipitant	Additive	Protein Conc.	Comment
Vijayalakshmi *et al.*						
MDL-28050	75 mM NaHPO4 pH 7.3	0.375 M NaCl		1 mM NaN3	3 mg/ml	protein (2.2 Å)
	100 mM NaHPO4 pH 7.3		24 % PEG 4000	1 mM NaN3		well
Hirugen / Hirulog 1	50 mM NaHPO4 pH 7.3	0.375 M NaCl		.5 mM NaN3	3-3.7 mg/ml	protein (2.3 Å)
	0.1 M NaHPO4 pH 7.3		28% PEG 8000	1 mM NaN3		well
FPAM + Hirugen	0.1 M NaHPO4 pH 7.3				5 mg/ml	protein (2.5 Å)
	0.1 M NaHPO4 pH 7.3		28% PEG 8000			well
Hirulog 3	75 mM NaHPO4 pH 7.3	0.38 M NaCl		1mM NaN3	5 mg/ml	protein (2.3 Å)
	0.1 M NaHPO4 pH 7.3		24% PEG 8000	1 mM NaN3		well
Bode *et al.*						
NAPAP	0.1 M KHPO4 pH 8.0				10 mg/ml	protein (2.3 Å)
	0.1 M KHPO4 pH 8.0		1.9 M NH4SO4			
PPACK	2 mM MOPS pH7	0.1 M NaCl			10 mg/ml	protein (1.9Å)
	0.2 M PO4 pH 6-7	0.5 M NaCl	20 % PEG 6000	0.5 % NaN3		well
Zdanov *et al.*						
Hirutonin-2	50 mM NaHPO4 pH 5.5	0.1 M NaCl			10 mg/ml	protein (2.1 Å)
	0.1 M Na Citrate pH 5.5	0.1 M NaCl	24 % PEG 4000			well

5

10

-53-

Overview of Assay Apparatus

The assay apparatus of the present invention is directed to an automated temperature adjusting and spectral emission receiving system that simultaneously adjusts the temperature of a multiplicity of samples over a defined temperature range and receives spectral emission from the samples. The assay apparatus of the present invention is particularly useful for performing microplate thermal shift assays of protein stability. The assay apparatus of the present invention can be used to practice all of the methods of the present invention.

The assay apparatus of the present invention replaces separate heating devices and spectral emission receiving devices. In contrast to other devices, the assay apparatus of the present invention can be configured to simultaneously adjust the temperature of a multiplicity of samples and receive spectral emissions from the samples during adjustment of temperature in accordance with a predetermined temperature profile.

After heat denaturation, reversibly folding proteins partially or fully refold after heat denaturation. Refolding precludes meaningful measurements in a thermal shift assay. Using the assay apparatus of the present invention, however, one can assay reversibly folding proteins in a thermal shift assay. That is because in the assay apparatus of the present invention, spectral measurements are taken while the protein is being heated. And protein refolding does not occur.

In such a configuration, the assay apparatus of the present invention includes a sensor which is positioned over a movable heat conducting block upon which an array of samples is placed. A relative movement means, such as a servo driven armature, is used to move the sensor so that the sensor is sequentially positioned over each sample in the array of samples. The sensor receives spectral emissions from the samples.

The assay apparatus of the present invention can be configured so that it contains a single heat conducting block. Alternatively, the assay apparatus can be configured so that it contains a plurality of heat conducting blocks upon a movable platform. The platform may be a translatable platform that can be translated, for example, by a servo driven linear slide device. An exemplary

-54-

linear slide device is model SA A5M400 (IAI America, Torrance, CA). In this embodiment, the sensor receives spectral emissions from each of the samples on a given heat conducting block. The platform is then translated to place another heat conducting block and its accompanying samples under the sensor so that it

5   receives spectral emissions from each of the samples on that heating block. The platform is translated until spectral emissions are received from the samples on all heat conducting blocks.

Alternatively, the platform may by a rotatable platform that may be rotated, for example, by a servo driven axle. In the latter embodiment, the sensor

10 receives spectral emissions from each of the samples on a given heat conducting block. The platform is then rotated to place another heat conducting block and its accompanying samples under the sensor so that it receives spectral emissions from each of the samples on that heating block. The platform is rotated until spectral emissions are received from the samples on all heat conducting blocks.

15 *System Description*

Figure 29 shows a schematic diagram of one embodiment of an assay apparatus **2900** of the present invention. Assay apparatus **2900** includes a heat conducting block **2912** that includes a plurality of wells **2920** for a plurality of samples **2910**. Heat conducting block **2912** is composed of a material that has a

20 relatively high coefficient of thermal conductivity, such as aluminum, stainless steel, brass, teflon, and ceramic.

Thus, heat conducting block **2912** can be heated and cooled to a uniform temperature but will not be thermally conductive enough to require excess heating or cooling to maintain a temperature.

25 Assay apparatus **2900** also includes a light source **2906** for emitting an excitatory wavelength of light, shown generally at **2916**, for the samples. Light source **2906** excites samples **2910** with excitatory light **2916**. Any suitable light source can be used. For example a tungsten-halogen lamp can be used. Alternatively, a Xenon-arc lamp, such as the Biolumin 960 (Molecular Dynamics)

30 can used.

Alternatively, a high pressure mercury (Hg) Lamp can be used. High pressure mercury lamps emit light of higher intensity than Xenon (Xe) lamps. The intensity of light from a high pressure mercury lamp is concentrated in specific lines, and are only useful if the Hg lines are at suitable wavelengths for excitation of particular fluorophores.

Some fluorescent plate readers employ lasers for excitation in the visible region of the electromagnetic spectrum. For example, the FluorImager™ (Molecular Dynamics, Palo Alto, CA) is such a device. This technology is useful when using fluorescent dyes that absorb energy at around 480 nm and emit energy at around 590 nm. Such a dye could then be excited with the 488 nm illumination of standard argon, argon/krypton lasers. For example, 1,1-dicyano-2-[6-(di-methylamino)naphthalen-2-yl]propene (DDNP) is such a dye. The advantage in using a laser is that a laser is characterized by very high intensity light, which results in an improved signal to noise ratio.

Excitatory light 2916 causes a spectral emission 2918 from samples 2910. Spectral emission 2918 can be electromagnetic radiation of any wavelength in the electromagnetic spectrum. Preferably, spectral emission 2918 is fluorescent, ultraviolet, or visible light. Most preferably, spectral emission 2918 is fluorescence emission. Spectral emission 2918 is received by a photomultiplier tube 2904. Photomultiplier tube 2904 is communicatively and operatively coupled to a computer 2914 by an electrical connection 2902. Computer 2914 functions as a data analysis means for analyzing spectral emission as a function of temperature.

As discussed above, the spectral receiving means or sensor of the assay apparatus of the present invention can comprise a photomultiplier tube. Alternatively, the spectral receiving means or sensor can include a charge coupled device or a charge coupled device camera. In still another alternative, the spectral receiving means or sensor can include a diode array.

An alternate embodiment of the assay apparatus of the present invention is shown in Figure 30. In the embodiment shown in Figure 30, a charge coupled device (CCD) camera 3000 is used to detect spectral emission 2918 from samples 2910. CCD camera 3000 can be any CCD camera suitable for imaging fluorescent

-56-

emissions. For example, suitable CCD cameras are available from Alpha-Innotech (San Leandro, CA), Stratagene (La Jolla, CA), and BioRad (Richmond, CA). For measuring fluorescent emission in the microplate thermal shift assay, one alternative to a fluorescent plate reader is a charge coupled device (CCD). For example, high resolution CCD cameras can detect very small amounts of electromagnetic energy, whether it originates from distance stars, is diffracted by crystals, or is emitted by fluorophores. A CCD is made of semi-conducting silicon. When photons of light fall on it, free electrons are released. As an electronic imaging device, a CCD camera is particularly suitable for fluorescence emission imaging because it can detect very faint objects, affords sensitive detection over a broad spectrum range, affords low levels of electromagnetic noise, and detects signals over a wide dynamic range--that is, a charge coupled device can simultaneously detect bright objects and faint objects. Further, the output is linear so that the amount of electrons collected is directly proportional to the number of photons received. This means that the image brightness is a measure of the real brightness of the object, a property not afforded by, for example, photographic emulsions.

When a fluorescence imaging camera or a CCD camera is used, excitatory light 2916 can be a suitable lamp that is positioned over the plurality of samples 2910. Alternatively, excitatory light 2916 can be a suitable lamp that is positioned under the plurality of samples 2910. In another alternative embodiment, excitatory light 2916 can be delivered to each sample 2910 by a plurality of fiber optic cables. Each fiber optic cable is disposed through one of a plurality of tunnels in conducting block 2912. Thus, each of samples 2910 receives excitatory light 2916 through a fiber optic cable.

As shown in Figure 30, source 2906 excites samples 2910 with excitatory light 2916. Excitatory light 2916 causes spectral emission 2918 from samples 2910. Spectral emission 2918 is filtered through an emission filter 3002. Emission filter 3002 filters out wavelengths of spectral emission 2918 that are not to be monitored or received by CCD camera 3000. CCD camera 3000 receives the filtered spectral emission 2918 from all of samples 2910 simultaneously. For simplicity and ease of understanding, only spectral emissions form one row of

-57-

samples 2910 are shown in Figure 30. CCD camera 3000 is communicatively and operatively coupled to computer 2914 by electrical connection 2902.

With reference now to Figure 31, one embodiment of assay apparatus 2900 is shown in more detail. As shown in Figure 31, many apparatus components are attached to a base 3100. A heat conducting block relative movement means 3128 is used to move heat conducting block 2912 in directions 3150 and 3152. Heat conducting block relative movement means 3128 is communicatively and operatively connected to a servo controller 3144. Activation of heat conducting block relative movement means 3128 by servo controller 3144 moves heat conducting block 2912 in directions 3150 and 3152. Servo controller 3144 is controlled by a computer controller 3142. Alternatively, computer 2914 could be used to control servo controller 3144.

A sensor is removably attached to a sensor armature 3120. An exemplary sensor is a fiber optic probe 3122. Fiber optic probe 3122 includes a fiber optic cable capable of transmitting receiving excitatory light 2916 to samples 2910, and a fiber optic cable capable of receiving spectral emission 2918 from samples 2910. Electromagnetic radiation is transmitted from excitatory light source 2906 to fiber optic probe 3122 by excitatory light input fiber optic cable 3108. In one embodiment of the present invention, a spectral receiving means comprising photomultiplier tube 2904 is used to detect spectral emission from samples 2910. In this embodiment, electromagnetic radiation is transmitted from fiber optic probe 3122 to photomultiplier tube 2904 by fiber optic cable 3110. In an alternative embodiment of the present invention, CCD camera 3002 is used to detect spectral emission from samples 2910. In this embodiment, fiber optic cable 3110 is not required.

A temperature sensor 3124 is removably attached to sensor armature 3120. Temperature sensor 3124 is communicatively and operably linked to a temperature controller 3162. Temperature sensor 3124 monitors the temperature of heat conducting block 2912 and feeds temperature information back to temperature controller 3162. Temperature controller 3162 is connected to heat conducting block 2912 by a thermoelectric connection 3164. Under the action of temperature controller 3162, the temperature of heat conducting block 2912 can

-58-

be increased, decreased, or held constant. Particularly, the temperature of heat conducting block 2912 can be changed by temperature controller 3162 in accordance with a pre-determined temperature profile. Preferably, temperature computer controller 3162 is implemented using a computer system such as that described below with respect to Figure 37.

As used herein, the term "temperature profile" refers to a change in temperature over time. The term "temperature profile" encompasses continuous upward or downward changes in temperature, both linear and non-linear changes. The term also encompasses any stepwise temperature change protocols, including protocols characterized by incremental increases or decreases in temperature during which temperature increases or decreases are interrupted by periods during which temperature is maintained constant. In the apparatus of the present invention, the temperature profile can be pre-determined by programming temperature computer controller 3162. For example, temperature profiles can be stored in a memory device of temperature controller 3162, or input to temperature controller 3162 by an operator.

A sensor armature relative movement means 3130 is used to move sensor armature 3120 in directions 3154 and 3156. A sensor armature servo controller 3118 is fixedly connected to excitatory light filter housing 3160. Activation of sensor armature servo controller 3118 moves fiber optic probe 3122 in directions 3154 and 3156. It would be readily apparent to one of ordinary skill in the relevant art how to configure servo controllers to move heat conducting block 2912 and sensor armature 3120. It should be understood that the present invention is not limited to the use of servo controllers for movement of heat conducting block 2912 and sensor armature 3120, and other suitable means known to one of skill in the art can also be used, such as a motor.

Servo controllers 3118 and 3144 are both communicatively and operatively connected to computer controller 3142. Computer controller 3142 controls the movement of sensor armature 3120 in directions 3154 and 3156. In addition, computer controller 3142 controls the movement of heat conducting block relative movement means 3128 in directions 3150 and 3152.

In the assay apparatus of the present invention, excitatory light source 2906 is used to excite samples 2910. Excitatory light source 2906 is communicatively and operably connected to excitatory light filter 3104, which is contained within excitatory light filter housing 3160. Excitatory light filter 3104 filters out all wavelengths of light from excitatory light source 2906 except for the wavelength(s) of light that are desired to be delivered by fiber optic probe 3122 to samples 2910. An excitatory light filter servo controller 3106 controls the aperture of excitatory light filter 3104. Excitatory light source 2906 and excitatory light filter servo controller 3106 are communicatively and operatively connected to excitatory light computer controller 3102. Computer controller 3102 controls the wavelength of excitatory light transmitted to samples 2910 by controlling excitatory light filter servo controller 3106. Excitatory light 2916 is transmitted through excitatory light input fiber optic cable 3108 to fiber optic probe 3122 for transmission to samples 2912.

Spectral emission 2918 from samples 2910 is received by fiber optic probe 3122 and is transmitted to a spectral emission filter 3114 by output fiber optic cable 3110. Spectral emission filter 3114 is contained within a spectral emission filter housing 3166. Spectral emission filter housing 3166 is disposed on photomultiplier tube housing 3168. Photomultiplier tube housing 3168 contains photomultiplier tube 2904. A spectral emission servo controller 3112 controls the aperture of spectral emission filter 3114, thereby controlling the wavelength of spectral emission 2918 that is transmitted to photomultiplier tube 2904. Spectral emission servo controller 3112 is controlled by a computer controller 3170.

Spectral emission 2918 from samples 2910 is transmitted from photomultiplier tube 2904. Electrical output 3140 connects photomultiplier tube 2904 to electric connection 2902. Electric connection 2902 connects electrical output 3140 to computer 2914. Driven by suitable software, computer 2914 processes the spectral emission signal from samples 2910. Exemplary software is a graphical interface that automatically analyzes fluorescence data obtained from samples 2910. Such software is well known to those of ordinary skill in the art. For example, the CytoFluor™II fluorescence multi-well plate reader

(PerSeptive Biosystems, Framingham, MA) utilizes the Cytocalc™ Data Analysis System (PerSeptive Biosystems, Framingham, MA). Other suitable software includes, MicroSoft Excel or any comparable software.

Figures 32A-C illustrate one embodiment of a thermal electric stage or heat conducting block for the assay apparatus of the present invention. Figure 32A shows a side view of heat conducting block 2912 and a heat conducting wire 3206. Figure 32B shows a top view of heat conducting block 2912 and heat conducting wire 3206. Heat conducting wire 3206 is a temperature adjusting element that adjusts the temperature of heat conducting block 2912. By means readily known to one of skill in the art, temperature controller 3162 causes heat conducting wire 3206 to increase or decrease in temperature, thereby changing the temperature of heat conducting block 2912. For example, an exemplary temperature controller is a resistance device that converts electric energy into heat energy. Alternatively, the heating element can be a circulating water system, such as that disclosed in U.S. patent no. 5,255,976, the content of which is incorporated herein by reference. In another alternative, the temperature adjusting element can be a heat conducting surface upon which heat conducting block 2912 is disposed. Particularly, the temperature of heat conducting wire 3206 can be changed by temperature controller 3162 in accordance with a pre-determined temperature profile. Temperature controller 3162 is preferably implemented using a computer system such as that described below with respect to Figure 37. Alternatively, computer 2914 could be used to implement temperature controller 3162. An exemplary set of specifications for temperature controller 3162 and heat conducting block 2912 is as follows:

resolution	0.1 °C
accuracy	+ 0.5°C
stability	0.1 °C
repeatability	0.1 °C.

Temperature controller 3162 changes temperature in accordance with a temperature profile as discussed below with respect to Figures 36A and 36B.

The temperature of heat conducting block 2912 can be controlled such that a uniform temperature is maintained across the heat conducting block. Alternatively, the temperature of heat conducting block 2921 can be controlled

-61-

such that a temperature gradient is established from one end of the heat conducting block to the other. Such a technique is disclosed in U.S. patent nos. 5,255,976 and 5,525,300, the entirety of both of which is incorporated by reference.

5   Heat conducting block 2912 is preferably configured with plurality of wells 2920 for samples 2910 to be assayed. In one embodiment, each of wells 2920 is configured to receive a container containing one of plurality of samples 2910. Alternatively, heat conducting block 2912 is configured to receive a container containing plurality of samples 2910. An exemplary container for

10   containing plurality of samples 2910 is a microtiter plate.

In yet a further alternate embodiment, heat conducting block 2912 is configured to receive a heat conducting adaptor that is configured to receive a container containing one or more of samples 2910. The heat conducting adaptor is disposed on heat conducting block 2912, and the container containing samples

15   2910 fits into the heat conducting adaptor. Figures 32C-E show three exemplary configurations of a heat conducting adaptor. An adaptor 3200 is configured with round-bottomed wells. An adaptor 3202 is configured with square-bottom wells. An adaptor 3204 is configured with V-shaped wells. For example, adaptor 3200 can receive a plurality of round-bottom containers, each containing one sample.

20   Similarly, adaptor 3202 can receive a plurality of square-bottom containers, and adaptor 3204 can contain a plurality of V-shaped bottom containers. Adaptors 3200, 3202, and 3204 can also receive a carrier for a multiplicity of round-bottom containers. An exemplary carrier is a microtitre plate having a plurality of wells, each well containing a sample. When heat conducting block 2912 is heated, heat

25   conducting adaptors 3200, 3202, or 3204 are also heated. Thus, the samples contained in the containers that fit within adaptors 3200, 3202, or 3204 are also heated. Adaptors 3200, 3202, and 3204 can accept standard microplate geometries.

Another embodiment of the assay apparatus of the present invention is

30   shown in Figure 33. In this embodiment, a plurality of heat conducting blocks 2912 is mounted on a rotatable platform or carousel 3306. Alternativeley, the platform can be a translatable platform. Platform or carousel 3306 can be

composed of a heat conducting material, such as the material that heat conducting

block 2912 is composed of. Although six heat conducting blocks are shown in

Figure 33, this number is exemplary and it is to be understood that any number

of heat conducting blocks can be used. As shown in Figure 33, an axle 3308 is

5   rotatably connected to base 3100. Rotatable platform 3306 is axially mounted to

rotate about axle 3308. Rotation of axle 3308 is controlled by a servo controller

3312. Servo controller 3312 is controlled by a computer controller 3314 in a

manner well known to one of skill in the relevant arts. Computer controller 3314

causes servo controller 3312 to rotate axle 3308 thereby rotating rotatable

10   platform 3306. In this manner, heat conducting blocks 2912 are sequentially

placed under fiber optic probe 3122.

Each of the plurality of heat conducting blocks 2912 can be controlled

independently by temperature controller 3162. Thus, the temperature of a first

heat conducting block 2912 can be higher or lower than the temperature of a

15   second heat conducting block 2912. Similarly, the temperature of a third heat

conducting block 2912 can be higher or lower than the temperature of either first

or second heat conducting block 2912.

In a manner similar to that described above for Figure 31, relative

movement means 3130 is also used to move sensor armature 3120 in directions

20   3150 and 3152 so that fiber optic probe 3122 can be moved to detect spectral

emission from samples 2910. A second sensor armature relative movement

means 3316 is used to move sensor armature 3120 in directions 3154 and 3156.

The temperature of heat conducting blocks 2912 is controlled by

temperature controller 3162. Temperature controller 3162 is connected to

25   rotatable platform 3306 by connection 3164 to heat conducting blocks 2912.

Under the action of temperature controller 3162, the temperature of heat

conducting blocks 2912 can be increased and decreased. Alternatively,

temperature controller 3162 can be configured to adjust the temperature of

rotatable platform 3306. In such a configuration, when rotatable platform 3306

30   is heated, heat conducting blocks 2912 are also heated. Alternatively, the

temperature of each of heat conducting blocks 2912 can be controlled by a

circulating water system such as that noted above.

In a manner similar to that illustrated in Figure 31, excitatory light source 2906 is used to excite samples 2910. Excitatory light source 2906 is communicatively and operably connected to excitatory light filter 3104, which is contained within excitatory light filter housing 3160. Excitatory light filter 3104 filters out all wavelengths of light from excitatory light source 2906 except for the wavelength(s) of light that are desired to be delivered by fiber optic probe 3122 to samples 2910. An excitatory light filter servo controller 3106 controls the aperture of excitatory light filter 3104. Excitatory light source 2906 and excitatory light filter servo controller 3106 are communicatively and operatively connected to excitatory light computer controller 3102. Computer controller 3102 controls the wavelength of excitatory light transmitted to samples 2910 by controlling excitatory light filter servo controller 3106. Excitatory light 2916 is transmitted through excitatory light input fiber optic cable 3108 to fiber optic probe 3122 for transmission to samples 2912.

Spectral emission 2918 from samples 2910 is received by fiber optic probe 3122 and is transmitted to spectral emission filter 3114 by fiber optic cable 3110. Spectral emission servo controller 3112 controls spectral emission filter 3114 aperture and thus controls the wavelength of spectral emission that is transmitted to photomultiplier tube 2904. In a manner similar to that explained for Figure 31, spectral emission servo controller 3112 is controlled by computer controller 3170.

The assay apparatus of the present invention can detect spectral emission from samples 2910 one sample at a time or simultaneously from a subset of samples 2910. As used herein, the term "subset of samples" refers to at least two of samples 2910. To detect spectral emission simultaneously from a subset of samples in an embodiment of the assay apparatus of the present invention comprising photomultiplier tube 2904, a plurality of excitatory light filters 3104, excitatory light input fiber optic cables 3108, emission light output fiber optic cables 3110, and emission light filters 3114 must be used.

The spectral emission signal is transmitted from photomultiplier tube 2904 to computer 2914. Photomultiplier tube 2904 is communicatively and operatively coupled to computer 2914 by electrical connection 2902. Connection

2902 is connected to photomultiplier tube 2904 through electrical output 3140. Computer 2914 functions as a data analysis means for analyzing spectral emission as a function of temperature.

Figure 34 illustrates a top view of the assay apparatus shown in Figure 33
5   with a housing 3400 that covers the apparatus. A door 3402 opens to reveal samples 2910. Door 3402 can be a hinge door that swings open. Alternatively, door 3402 can be a sliding door that slides open. A side view of the assay apparatus shown in Figures 33 and 34 is illustrated in Figure 35. Cover 3400 is disposed on top of base 3100. Cover 3400 can be made of any suitable material.
10   For example, cover 3400 can be made of plexiglass, fiberglass, or metal.

Figures 36A and 36B illustrate a temperature profile and how the temperature profile is implemented using the assay apparatus of the present invention. Figure 36A illustrates a temperature profile 3600 that shows the temperature of heat conducting blocks 2912 as a function of time. Heat
15   conducting blocks 2912 and samples 2910 are heated in a continuous fashion in accordance with temperature profile 3600. Alternatively, rotatable platform 3306 can be heated along with heat conducting blocks 2912. Preferably, temperature profile 3600 is linear, with temperatures ranging from about 25°C to about 110°C.

20   Alternatively, temperature profile 3600 can be characterized by incremental, stair step increases in temperature, in which heat conducting blocks 2912 and samples 2910 are heated to a predetermined temperature, maintained at that temperature for a predetermined period of time, and than heated to a higher pre-determined temperature. For example, temperature can be increased from
25   0.5°C to 20°C per minute. Although the temperature range from about 25°C to about 110°C is disclosed, it is to be understood that the temperature range with which a given target molecule, for example, a protein, is to be heated to generate a thermal denaturation curve can readily be determined by one of ordinary skill in the art. The length of time over which temperature profile 3600 is
30   accomplished will vary, depending on how many samples are to be assayed and on how rapidly the sensor that receives spectral emission 2918 can detect spectral emission 2918 from samples 2910. For example, an experiment in which each

of six heat conducting blocks 2912 holds a total of 96 samples 2910 (for a total of 576 samples), and in which samples are scanned using a fluorescent reader device having a single fiber optic probe, and in which the temperature profile is from 38°C and 76°C, would take approximately 38 minutes to perform using the apparatus shown in Figure 33.

While heating in accordance with temperature profile 3600, spectral emission 2918 from each sample 2910 in a first heat conducting block 2912 is received through fiber optic probe 3122. As illustrated in Figure 36B, after emissions from all of samples 2910 in first heat conducting block 2912 have been received, platform 3306 is rotated to move the next heat conducting block 2912 under fiber optic probe 3122 and spectral emission 2918 from samples 2910 is received by fiber optic probe 3122. This process is continued until reception of spectral emissions from all samples in all heat conducting blocks 2912 is complete. Spectral emission from samples 2910 on each heat conducting block 2912 can be received one at a time, simultaneously from a subset of samples, simultaneously from one row of samples at a time, or all of the samples at one time.

Computer Program Implementation of the Preferred Embodiments

The present invention may be implemented using hardware, software, or a combination thereof, and may be implemented in a computer system or other processing system. A flowchart 3800 for implementation of one embodiment of the present invention is shown in Figure 38. Flowchart 3800 begins with a start step 3802. In a step 3804, temperature profile 3600 is initiated. For example, temperature controller 3162 causes the temperature of heat conducting block 2912 to increase. In a step 3806, a sensor such as fiber optic probe 3122 or CCD camera 3000 is moved over a sample 2910, row of samples 2910, or all of samples 2910. In a step 3808, excitatory light is transmitted to sample(s) 2910 using excitatory light source 2906. In a step 3810, spectral emission is received by the sensor from sample(s) 2910. In a decision step 3812, it is determined whether spectral emission 2918 has been received from all of the samples, rows

of samples, in one heat conducting block 2912. If spectral emission 2918 has not been received from all of the samples or rows of samples, the sensor is moved over the next sample or row of samples in a step 3814. Processing then continues at step 3808 to transmit excitatory light 2916. Processing then continues to a step 3810 to receive spectral emission 2918 from sample(s) 2910.

If spectral emission 2918 has been received from all of samples or rows of samples, processing continues to a decision step 3816. In decision step 3816, it is determined whether spectral emission 2918 has been received from samples in all heat conducting blocks. If not, rotatable platform 3306 is rotated in a step 3818 to place the next heat conducting block 2912 and samples 2910 contained therein under the sensor. Steps 3806 through 3818 are followed until spectral emission 2918 has been received from all of the samples in all of heat conducting blocks 2912. Processing then continues to a step 3820, in which temperature profile 3600 is completed and processing ends at a step 3822.

A flowchart 3900 for implementation of an alternate embodiment of the present invention is shown in Figure 39. In this embodiment, a sensor for simultaneously receiving spectral emission 2918 from all of samples 2910 on heat conducting block 2912, such as CCD camera 3000, is positioned over heat conducting block 2912. Flowchart 3900 begins with a start step 3902. In a step 3904, temperature profile 3600 is initiated. For example, temperature controller 3162 causes the temperature of heat conducting block 2912 to increase. In a step 3906, excitatory light is transmitted to sample(s) 2910 using excitatory light source 2906. In a step 3908, spectral emission is received by CCD camera 3000 from sample(s) 2910. In a decision step 3910, it is determined whether spectral emission 2918 has been received from all of heat conducting blocks 2912. If not, rotatable platform 3306 is rotated in a step 3912 to place the next heat conducting block 2912 and samples 2910 contained therein under CCD camera 3000. Steps 3906 through 3912 are followed until spectral emission 2918 has been received from samples 2910 in all of heat conducting blocks 2912. Processing then continues to a step 3914. In step 3914, temperature profile 3600 is completed and processing ends at a step 3916.

As stated above, the present invention may be implemented using hardware, software, or a combination thereof, and may be implemented in a computer system or other processing system. An exemplary computer system 3702 is shown in Figure 37. Computer controllers 3102, 3142, 3162, 3170, or 3314, can be implemented using one or more computer systems such as computer system 3702.

After reading this description, it will become apparent to a person skilled in the relevant art how to implement the invention using other computer systems and/or computer architectures. Computer system 3702 includes one or more processors, such as processor 3704. Processor 3704 is connected to a communication bus 3706.

Computer system 3702 also includes a main memory 3708, preferably random access memory (RAM), and can also include a secondary memory 3710. The secondary memory 3710 can include, for example, a hard disk drive 3712 and/or a removable storage drive 3714, representing a floppy disk drive, a magnetic tape drive, an optical disk drive, etc. The removable storage drive 3714 reads from and/or writes to a removable storage unit 3716 in a well known manner. Removable storage unit 3716 represents a floppy disk, magnetic tape, optical disk, etc. which is read by and written to by removable storage drive 3714. As will be appreciated, the removable storage unit 3716 includes a computer usable storage medium having stored therein computer software and/or data.

In alternative embodiments, secondary memory 3710 may include other similar means for allowing computer programs or other instructions to be loaded into computer system 3702. Such means can include, for example, a removable storage unit 3718 and an interface 3720. Examples of such can include a program cartridge and cartridge interface (such as that found in video game devices), a removable memory chip (such as an EPROM, or PROM) and associated socket, and other removable storage units 3718 and interfaces 3720 which allow software and data to be transferred from the removable storage unit 3718 to computer system 3702.

Computer system **3702** can also include a communications interface **3722**. Communications interface **3722** allows software and data to be transferred between computer system **3702** and external devices. Examples of communications interface **3722** can include a modem, a network interface (such as an Ethernet card), a communications port, a PCMCIA slot and card, etc. Software and data transferred via communications interface **3722** are in the form of signals **3724** which can be electronic, electromagnetic, optical or other signals capable of being received by communications interface **3722**. These signals **3724** are provided to communications interface via a channel **3726**. This channel **3726** carries signals **3724** and can be implemented using wire or cable, fiber optics, a phone line, a cellular phone link, an RF link and other communications channels. In the assay apparatus of the present invention, one example of channel **3726** is electrical connection **2902** that carries signal **3724** of spectral emission **2918** to computer **2914**.

In this document, the terms "computer program medium" and "computer usable medium" are used to generally refer to media such as removable storage device, **3716** and **3718**, a hard disk installed in hard disk drive **3712**, and signals **3724**. These computer program products are means for providing software to computer system **3702**.

Computer programs (also called computer control logic) are stored in main memory **3708** and/or secondary memory **3710**. Computer programs can also be received via communications interface **3722**. Such computer programs, when executed, enable the computer system **3702** to perform the features of the present invention as discussed herein. In particular, the computer programs, when executed, enable the processor **3704** to perform the features of the present invention. Accordingly, such computer programs represent controllers of the computer system **3702**.

In an embodiment where the invention is implemented using software, the software may be stored in a computer program product and loaded into computer system **3702** using removable storage drive **3714**, hard drive **3712** or communications interface **3722**. The control logic (software), when executed

by the processor **3704**, causes the processor **3704** to perform the functions of the invention as described herein.

In another embodiment, the invention is implemented primarily in hardware using, for example, hardware components such as application specific integrated circuits (ASICs). Implementation of the hardware state machine so as to perform the functions described herein will be apparent to persons skilled in the relevant art(s).

In yet another embodiment, the invention is implemented using a combination of both hardware and software.

The assay apparatus of the present invention is particularly suited for carrying out the methods of the present invention. To conduct a microplate thermal shift assay using the method and apparatus of the present invention, samples are placed in a heat conducting block, heated according to a predetermined temperature profile, stimulated with an excitatory wavelength of light, and the spectral emission from the samples is detected while the samples are being heated in accordance with the pre-determined temperature profile.

It is to be understood that the assay apparatus of the present invention is not limited to use with the methods of the present invention or limited to conducting assays on biological polymers, proteins, or nucleic acids. For example, the assay apparatus of the present invention can be used to incubate samples to a predetermined temperature. Alternatively, the assay apparatus of the present invention can be used to perform polymerase chain reaction, thermal cycling steps for any purpose, assaying thermal stability of a compound, such as a drug, to determine conditions that stabilize a compound, or to determine conditions that facilitate crystallization of a compound.

Having now generally described the invention, the same will become more readily understood by reference to the following specific examples which are included herein for purposes of illustration only and are not intended to be limiting unless otherwise specified.

-70-

Example 1
Ranking Ligands That Bind To The
Active Site Of Human α-thrombin

Using the computer controlled process DirectedDiversity® (see U.S. Patent 5,463,564), scientists at 3-Dimensional Pharmaceuticals, Inc. have generated a combinatorial library of compounds directed at the active site of human α-thrombin. Approximately 400 compounds were synthesized and assayed by a conventional spectrophotometric kinetic assay in which succinyl-Ala-Ala-Pro-Arg-p-nitroanilide (Bachem, King of Prussia, PA) served as substrate. Five of these compounds, which are characterized by K_i's that span almost four orders of magnitude in binding affinity, were used to test the range and limits of detection of the thermal shift assay. These five proprietary compounds are listed in Table 3, along with the K_i for each respective compound, as measured by the kinetic assay (last column). K_i's for these compounds ranged from 7.7 nM for 3dp-4026 to 20.0 μM for 3dp-3811.

A stock human α-thrombin solution (1.56 mg/mL) from Enzyme Research Labs was first diluted to 0.5 mg/mL (11 μM) with 50 mM Hepes, pH 7.5, 0.1 M NaCl (assay buffer, unless mentioned otherwise), and stored on ice. The five ligands (recrystallized solids characterized by mass spectrometry and NMR) were accurately weighed out to be 1.5 to 2.0 mg and dissolved in 1.0 mL of 100% DMSO so that the concentration was between 1.8 and 3.8 mM. A 96 well V-bottom Costar microplate was then set up such that 100 μL of the 11 μM human α-thrombin solution was pipetted into wells A1 through A6. This was followed by the addition of 2 μL of 3dp-3811 into well A2, 2 μL of 3dp-3959 into well A3, 2 μL of 3dp-4077 into well A4, 2 μL of 3dp-4076 into well A5, 2 μL of 3dp-4026 into well A6, and 2 μL of 100% DMSO into control well A1. The contents were mixed by repeated uptake and discharge using a 100 μL pipette tip. Finally, one drop of mineral oil (Sigma, St. Louis, MO) was added on top of the wells to reduce evaporation of samples at elevated temperatures. The microplate was then placed on heating block 4 of a RoboCycler Gradient 96 Temperature Cycler (Stratagene, La Jolla, CA), set at 25°C, for 1 minute. The plate was then placed into a SPECTRAmax™ 250 spectrophotometer (set to 30°C) and the absorbance

at 350 nm was measured for each sample. This reading served as the blank or reference from which all the other readings at higher temperatures were compared. The assay was initiated by setting heating block 1 to 38°C, programming the temperature cycler to move the microplate to heating block 1, and keeping the microplate there for 3 minutes. Following the equilibration at 38°C, the plate was moved to the 25°C block (Block 4) for 30 seconds, inserted in the spectrophotometer, and absorbance was read at 350 nm. The microplate was then put back into the temperature cycler and was moved to heating block 2, which had been pre-equilibrated at 40°C. After 3 minutes at 40°C, the plate was returned to 25°C (on block 4) for 30 seconds, and was returned to the spectrophotometer for a measurement of absorbance at 350 nm. This process was repeated 18 more times until the temperature had been raised to 76°C in 2°C increments. After subtraction of the blank absorbance (A_{350} at 25°C), turbidity, reflected in the absorbance value, was plotted as a function of temperature. The thermal denaturation curves for this experiment are shown in Figure 1.

The control (in well A1), which contained only 11 μM human α-thrombin in 2% DMSO, was found to undergo a thermal denaturation transition starting at ~50°C, as reflected in the large increase in A_{350}. The midpoint in this transition was observed to be ~55°C. This result was consistent with differential scanning calorimetric measurements for bovine prothrombin 1, which revealed a denaturation transition at T_m = 58°C (Lentz, B.R. et al., Biochemistry 33:5460-5468 (1994)). The thermal denaturation curves for all of the tested inhibitor compounds displayed a shift in the transition towards higher temperatures. 3dp-4026 showed the largest shift in T_m: ~ 9°C. This result is consistent with the fact that, among the compounds tested, 3dp-4026 exhibited the greatest binding affinity, as judged by kinetic measurements with succinyl-Ala-Ala-Pro-Arg-p-nitroanilide as substrate. Indeed, the rank order of shifts in T_m, shown in Figure 1, paralleled the order of binding affinity as measured by conventional enzymology. These results indicate that by simply observing the shift in T_m for a series of compounds relative to the control, one can easily and correctly rank a series of compounds in increasing order of binding affinity to the protein of interest.

-72-

It was possible to take the microplate thermal shift assay one step further
and estimate the binding affinity of each ligand at T_m. This was done by
substituting T_0, T_m, ΔH_u and ΔC_{pu} into equation (1). If ΔH_u and ΔC_{pu} cannot be
measured because a calorimetric device is not available, one can make educated
5   guesses at ΔH_u and ΔC_{pu} for the therapeutic target. In the case of human α-
thrombin, it was possible to use $\Delta H_u = 200.0$ kcal/mol, a value measured for the
closely related protein bovine prothrombin 1 (Lentz, B.R. et al., Biochemistry
33:5460-5468 (1994)). A value of $\Delta C_{pu} = 2.0$ kcal/mol-°K was used to calculate
K_L at T_m since similar proteins of this size have been shown to yield similar
10   values. The binding affinities at T_m of the five test ligands closely paralleled the
K_i's measured with a spectrophotometric substrate (Table 3).

Table 3. Microplate Thermal Shift Assay for Ligands Binding to the Active
Site of Human α-thrombin. Turbidity as an Experimental Signal.

Protein/ Ligand	[Ligand] (μM)	T_m (°K)	ΔT_m (°K)	K_d at T_m[a] (nM)	K_d at 310°K[b] (nM)	K_i (310°K)[c] (nM)
Thrombin (TH)	none	327.15	0.0			
TH/3dp-3811	37	328.15	1.0	14400	5880	2000
TH/3dp-3959	76	332.15	5.0	660	224	250
TH/3dp-4077	48	333.15	6.0	160	51.7	46
TH/3dp-4076	60	334.15	7.0	76.3	23.6	26
TH/3dp-4026	67	336.15	9.0	12.3	3.5	7.7

[a] Calculations for K_d at T_m were made using equation (1) with $\Delta H^{T0}_u = 200.0$ kcal/mole, as
observed for prothrombin 1 by Lentz, B.R. et al., Biochemistry 33:5460-5468 (1994), and an
estimated ΔC_{pu} - 2.0 kcal/mole - °K; and $K_d = 1/K_a$.

[b] Estimates for K_d at T = 310°K were made using equation (3), where ΔH^T_L was estimated to
be -10.0 kcal/mole.

[c] K_i was measured by classical enzymological methods that look at the [inhibitor] dependence
of the enzymatic hydrolysis of the spectrophotometric substrate succinyl-Ala-Ala-Pro-Arg-p-
nitroanilide at 310°K (50 mM Hepes, pH 7.5, 0.2 M NaCl, 0.05%
β-octylglucoside).

-73-

Example 2
Ranking Ligands That Bind To The Heparin
Binding Site of Human α-thrombin

Assays for ligands that bind to the heparin binding site of human α-
thrombin are more difficult to perform than assays for ligands that bind to the
active site of human α-thrombin. At the heparin binding site, no substrate is
hydrolyzed, so no spectrophotometric signal can be amplified for instrumental
detection. Heparin activity is usually estimated in biological clotting time assays.
Alternatively, heparin binding affinity for human α-thrombin can be determined
by laboriously conducting 15 to 20 single point assays, in which the concentration
of low MW heparin is varied over two logs, and monitoring the quenching of the
fluorescent probe, p-aminobenzamidine, bound to the active site of human α-
thrombin (Olson, S.T. *et al., J. Biol. Chem.* 266:6342-6352 (1991)). Thus,
heparin binding to human α-thrombin represents the kind of challenge
encountered with the vast majority of non-enzyme receptor/ligand binding events,
which are commonly observed for hormone/receptor interactions, repressor/DNA
interactions, neurotransmitter/receptor interactions, etc. Several heparin-like
sulfated oligosaccharides and sulfated naphthalene compounds were assayed by
the microplate thermal shift assay. Using the thermal shift assay, it was possible
to use a single compound per well to quickly rank the compounds in order of
increasing binding affinity, with K_d's ranging over three orders of magnitude (see
Table 4). Like the experiment in Example 1, the thermal shift assay results
agreed closely with the results obtained through an alternative method, which
required a series of laborious (15 to 20 single determinations) fluorescence
quench assays over a wide range of concentrations of low MW heparin (Olson,
S.T. et al., J. Biol. Chem. 266:6342-6352 (1991)). These results confirm that by
simply observing the shift in T_m for a series of compounds, relative to the control,
one can easily and correctly rank a series of compounds in increasing order of
binding affinity for the protein of interest.

A search of the literature did not locate alternatively measured binding
results for the other ligands, which may attest to the difficulty of these
experiments. However, the literature did reveal that pentosan polysulfate (PSO_4)

-74-

(Sigma, St. Louis, MO), dextran SO_4 (Sigma, St. Louis MO), and suramin (CalBiochem, LaJolla, CA) have been observed to have anticoagulant properties. Indeed, pentosan polysulfate and suramin were tested previously in clinical trials for anti-angiogenic activity, but were discounted due to toxic effects, many of which were described as coagulation anomalies (Pluda, J.M. et al., J. Natl. Cancer Inst. 85:1585-1592 (1993); Stein, C.A., Cancer Res. 53:2239-2249 (1993)). The affinities of pentosan PSO_4 and suramin at T_m, as measured by the thermal shift assay, were found to be 7-fold and 5700-fold higher, respectively, than the affinity of heparin 5000 (Table 4). These results suggested that these ligands may alter clotting rates by interfering with the heparin mediated binding of human α-thrombin to anti-thrombin III (AT III), a protein co-factor for human α-thrombin activity.

The results in Table 4 revealed another advantage of the microplate thermal shift assay for screening compound libraries: the process is blind and unbiased in the sense that it detects ligand binding regardless of whether it is at the active site, an allosteric cofactor binding site, or at a protein subunit interface. The ability to detect ligands that bind with high affinity to sites outside an enzyme's active site will greatly facilitate discovery of lead molecules.

Table 4. Microplate Thermal Shift Assay for Ligands Binding to the Heparin Binding Site of Human α-thrombin. Turbidity as an Experimental Signal.

Protein/ Ligand	[Ligand] (μM)	T_m (°K)	ΔT_m (°K)	K_d at T_m[a] (nM)	K_d at 298°K[b] (nM) Observed	K_i (298°K) (nM) Literature
Thrombin (TH)	none	329.15	0.0			
TH/Heparan SO$_4$	61	329.65	0.5	38,300	7,570	-
TH/Heparin 3000	50	330.15	1.0	19,700	3,810	-
TH/Heparin 5000	44	330.15	1.0	17,200	3,490	5,400[c]
TH/Pentosan PSO$_4$	40	332.15	3.0	2,425	427	-
TH/Dextran SO$_4$	48	336.15	7.0	68.8	10.1	-
TH/Suramin	102	340.15	11.0	3.02	0.37	-

[a] Calculations for K_d at T_m were made using equation (1) with $\Delta H^{T_0}_u = 200.0$ kcal/mole, as observed for pre-thrombin 1 by Lentz, B.R. et al., Biochemistry 33:5460-5468 (1994), and an estimated ΔC_{pu} = 2.0 kcal/mole -°K; and $K_d = 1/K_a$. The thrombin, human α-thrombin (Factor IIa), from Enzyme Research Labs (South Bend, IN) was diluted to 0.5 mg/mL (11μM) using 50 mM Hepes, pH 7.5, 0.1 M NaCl (3-fold dilution). All ligands were dissolved in the same buffer.

[b] Estimates for K_d at T = 298°K were made using equation (3), where ΔH^T_L is estimated to be - 10.0 kcal/mole.

[c] Olson, S.T. et al., J. Biol. Chem. 266:6342-6352 (1991).

Example 3
Ranking aFGF Ligands

The second therapeutic receptor tested in the microplate thermal shift assay was acidic fibroblast growth factor (aFGF), a growth factor that plays a key role in angiogenesis (Folkman, J. et al., J. Biol. Chem. 267:10931-10934 (1992)). A synthetic gene for this protein was purchased from R&D Systems (Minneapolis, MN), and was cloned and expressed in E. coli using methods similar to those described for basic fibroblast growth factor (bFGF) (Thompson, L.D. et al., Biochemistry 33:3831-3840 (1994); Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994); Springer, B.A. et al., J. Biol. Chem. 269:26879-26884 (1994)). Recombinant aFGF was then purified by heparin-

-76-

sepharose affinity chromatography as described (Thompson, L.D. et al.,
Biochemistry 33:3831-3840 (1994)). aFGF is also known to bind
heparin/heparan, which is a cofactor for mitogenic activity. Heparin-like
molecules, such as pentosan PSO_4 and suramin, inhibit the growth factor's
biological activity. A microplate thermal assay of these compounds was set up
in a way similar to that described above for human α-thrombin. The change in
turbidity, as a function of temperature, for each of the ligands suramin, heparin
5000, and pentosan PSO_4, is shown in Figure 2. The results are summarized in
Table 5. The affinity constants covered a fairly broad range of binding affinities,
with pentosan PSO_4 showing the highest affinity. The order of ligand binding
affinity of pentosan PSO_4, heparin 5000 and suramin paralleled that found for
bFGF, as measured using isothermal titrating calorimetry (Pantoliano, M.W. et
al., Biochemistry 33:10229-10248 (1994)). The lack of alternatively measured
binding affinities for these compounds probably attests to the difficulty of making
these measurements using assays which do not monitor physical, temperature-
dependent changes.

The results in Table 5 are consistent with the results in Tables 3 and 4.
Simply observing the shift in T_m for a series of compounds relative to the control,
one can easily and correctly rank a series of compounds in increasing order of
binding affinity to the protein of interest.

Table 5. Microplate Thermal Shift Assay for Ligands Binding to aFGF. Turbidity as an Experimental Signal.

Protein/ Ligand	[Ligand] (μM)	T_m (°K)	ΔT_m (°K)	K_d at T_m[a] (nM)	K_d at 298°K[b] (nM) Observed	K_i (298°K)[c] (nM) Literature
aFGF	none	317.15	0.0			
aFGF/EEEEE	50	317.15	0.0	>50,000		-
aFGF/Dermatan SO₄	50	318.15	1.0	37,000	12,700	-
aFGF/EEEEEEEE	50	322.15	5.0	10,076	3,040	-
aFGF/β-CD 14 SO₄	47	329.15	12.0	1055	213	1500
aFGF/suramin	200	330.15	13.0	3220	622	
aFGF/Heparin 5000	50	331.15	14.0	576	106	470
aFGF/Heparan SO₄	61	333.15	16.0	357	60	-
aFGF/Pentosan PSO₄	100	336.15	19.0	208	31	88

[a] Calculations for K_d at T_m were made using equation (1) with an estimated $\Delta H^{ro}_u = 60.0$ kcal/mole, and an estimated $\Delta C_{pu} = 0.95$ kcal/mole - °K; and $K_d = 1/K_a$. All ligands, except β-CD 14 SO₄, were purchased from Sigma and used without further purification. β-CD 14 SO₄ was purchased from American Maize Products Co. (Hammond, IN). The aFGF was diluted to 0.25 mg/mL in 50 mM Hepes, pH 7.5, 0.1 M NaCl. All ligands were dissolved in the same buffer.

[b] Estimates for K_d at T = 298°K were made using equation (3), where ΔH^T_L is estimated to be -10.0 kcal/mole.

[c] No published binding affinity data for these ligands was found in the literature, but the affinities for these ligands binding to bFGF, as measured by isothermal titrating calorimetry, are shown (Thompson, L.D. et al., Biochemistry 33:3831-3840 (1994); Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994)).

Example 4
Ranking bFGF Ligands

The microplate thermal shift assay was used to assess ligands for binding to the heparin binding site of basic fibroblast growth factor (bFGF). The gene for bFGF was purchased from R&D Systems and was cloned and expressed in E. coli as previously described (Thompson, L.D. et al., Biochemistry 33:3831-3840 (1994); Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994); Springer, B.A. et al., J. Biol. Chem. 269:26879-26884 (1994)). It was found that pentosan PSO₄ and suramin bound to bFGF with binding affinities of 55 nM and 3.5 μM,

respectively. This result for PSO_4 compared very well with the affinity of 88 nM observed for PSO_4 binding to bFGF, as determined by isothermal titrating calorimetry.

Example 5
Ranking Human α-thrombin Ligands Using Fluorescence Emission

Because fluorescence measurements are more sensitive than absorbance measurements, a fluorescence thermal shift assay was used to assess ligand binding to human α-thrombin. The fluorescence emission spectra of many fluorophores are sensitive to the polarity of their surrounding environment and therefore are effective probes of phase transitions for proteins (i.e., from the native to the unfolded phase). The most studied example of these environment dependent fluorophores is 8-anilinonaphthalene-1-sulfonate (1,8-ANS), for which it has been observed that the emission spectrum shifts to shorter wavelengths (blue shifts) as the solvent polarity decreases. These blue shifts are usually accompanied by an increase in the fluorescence quantum yield of the fluorophore. In the case of ANS, the quantum yield is 0.002 in water and increases to 0.4 when ANS is bound to serum albumin.

ANS was used as a fluorescence probe molecule to monitor protein denaturation. In the fluorescence assay, the final concentration of human α-thrombin was 0.5 μM, which is 20-fold more dilute than the concentrations used in the turbidity assays. This concentration of human α-thrombin is in the range used for the kinetic screening assays.

ANS was excited with light at a wavelength of 360 nm. The fluorescence emission was measured at 460 nm using a CytoFluor II fluorescence microplate reader (PerSeptive Biosystems, Framingham, MA). The temperature was ramped up as described above for the turbidity assays (see Example 1). The plot of fluorescence as a function of temperature is shown in Figure 3 for human α-thrombin alone, and for the 3dp-4026/human α-thrombin complex. The denaturation transition for human α-thrombin was clearly observed at 57°C, a temperature which is only slightly higher than that observed in the turbidity experiment. The result from the fluorescence assay is, nonetheless, in close

agreement with the T_m of 58°C observed for prothrombin 1 from differential scanning calorimetry experiments. Importantly, 3dp-4026 (at 67 μM) was found to shift the denaturation transition to ~66°C to give a shift in T_m of 9°C, which is identical to that found using turbidity as the detection signal (Table 3).

5   The results in Figure 3 and Table 4 illustrate several important points. First, at least a 20-fold increase in sensitivity can be gained by switching from an absorbance to a fluorescence emission detection system. This can be critical for those receptor proteins for which supplies are limited.

           Second, in the fluorescence assays, the denaturation transition signal is
10   much cleaner than the signal in the turbidity assays. In the turbidity assays, higher concentrations of protein led to precipitation of denatured protein. Precipitated protein contributed to the noisy signal.

           Third, shifts in T_m measurements from the microplate thermal shift assays are reproducible from one detection system to another.

15
Example 6
Ranking Ligands To The D(II) Domain of FGFR1

           The microplate thermal-shift assay was employed to test the binding of heparin 5000 and pentosan PSO$_4$ to the known heparin binding site in the D(II) domain of fibroblast growth factor receptor 1 (FGFR1). D(II) FGFR1 is a 124
20   residue domain which is responsible for most of the free energy of binding for bFGF. D(II) FGFR1 was cloned and expressed in E. coli. Recombinant D(II) FGFR1 was renatured from inclusion bodies essentially as described (Wetmore, D.R. et al., Proc. Soc. Mtg., San Diego, CA (1994)), except that a hexa-histidine tag was included at the N-terminus to facilitate recovery by affinity
25   chromatography on a Ni^{2+} chelate column (Janknecht, R. et al., Natl. Acad. Sci. USA 88:8972-8976 (1991)). D(II) FGFR1 was further purified on a heparin-sepharose column (Kan, M. et al., Science 259:1918-1921 (1993); Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994)). Purity was >95%, as judged by SDS-PAGE. The D(II) FGFR1 protein was concentrated to 12 mg/mL (~1
30   mM) and stored at 4°C.

The D(II) FGFR1 protein was dissolved in an ANS solution to a
concentration of 1.0 mg/mL (70 μM). The quantum yield for ANS bound to the
denatured form of D(II) FGFR1 was lower than the quantum yield for ANS bound
to human α-thrombin. Because ANS fluorescence is very environment dependent
5   (see Lakowicz, I.R., Principles of Fluorescence Spectroscopy, Plenum Press, New
York (1983)), the quantum yield observed for the denaturation of different
proteins will vary. For D(II) FGFR1, the signal for the turbidity version of the
assay, however, was nearly undetectable. Despite the decreased sensitivity for
D(II) FGFR1, ANS rescued this system for the microplate assay. A similar result
10   was obtained for Factor Xa, except that the fluorescence quantum yield for ANS
bound to denatured Factor Xa was almost as good as it was for human α-
thrombin. It was found that the fluorescence quantum yield for ANS bound to
denatured bFGF was as high as the quantum yield for ANS binding to human α-
thrombin.

15   The results of D(II) FGFR1 binding experiments, as determined by the
microplate thermal shift assay, are shown in Figure 4 and Table 6. As was
previously demonstrated for all of the other receptor proteins described above, the
microplate thermal shift assay facilitated the ranking of ligand binding affinities
for D(II) FGFR1.

Table 6. Microplate Thermal Shift Assay for Ligands Binding to D(II) FGFR1.
Fluorescence Emission as an Experimental Signal.

Protein/Ligand	[Ligand] (μM)	T_m (°K)	ΔT_m (°K)	K_d at T_m[a] (μM)	K_d at 298°K[b] (μM) Observed	K_d (298°K)[c] (μM) Literature
D(II) FGFR1	none	312.8	0.0			
D(II) FGFR1 / Heparin 5000	150	317.9	5.1	30.0	13.6	85.3
D(II) FGFR1 / Pentosan PSO₄	156	319.4	6.6	19.1	4.9	10.9

[a] Calculations for K_d at T_m were made using equation (1) with an estimated $\Delta H^{T_0}_u$ = 60.0 kcal/mole, and an estimated ΔC_{pu} = 0.95 kcal/mole - °K; and K_d = 1/K_a. The D(II) FGFR1 was diluted to 1.0 mg/mL (70 μM) in 50 mM Hepes, pH 7.5, 0.1 M NaCl with 136 μM ANS present. All ligands were dissolved in the same buffer and diluted 50-fold into the protein solution.
[b] Estimates for K_d at T = 298°K were made using equation (3), where ΔH^T_L = -12.1, and -7.48 kcal/mole for the pentosan PSO₄ and heparin 5000, respectively, as determined by isothermal titrating calorimetry (Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994)).
[c] Published binding affinity data for these ligands binding to D(II)-D(III) FGFR1 as determined by titrating calorimetry (Pantoliano, M.W. et al., Biochemistry 33:10229-10248 (1994)).

Example 7
Microplate Thermal Shift Assay of Factor D

In order to further demonstrate the cross target utility of the microplate thermal shift assay, another enzyme, Factor D, was tested for its ability to undergo thermal unfolding transitions. Factor D is an essential serine protease involved in the activation of the alternative pathway of the complement system, the major effector system of the host defense against invading pathogens. Factor D was purified from the urine of a patient with Fanconi's syndrome (Narayana *et al., J. Mol. Biol. 235*:695-708 (1994)) and diluted to 4 μM in assay buffer (50 mM Hepes, pH 7.5, 0.1 M NaCl). The assay volume was 10 μL and the concentration of 1,8-ANS was 100 μM. The experiment was carried out using 15 μL round bottom dimple plates (an 8 x 12 well array). The protein was heated in two degree increments between 42°C to 62° C, using a Robocycler™ temperature cycler. After each heating step, and prior to fluorescence scanning using the CytoFluor II™ fluorescence plate reader the sample was cooled to 25°C (see Example 1). The non-linear least squares curve fitting and other data analysis

-82-

were performed as described for Figure 3. The results of the microplate thermal

shift assay of Factor D is shown in Figure 5 and reveal a thermal unfolding

transition that occurs near 324 K (51°C) for the unliganded form of the protein.

No reversible ligands of significant affinity are known for Factor D. The results

5   in Figure 5 show that the microplate thermal shift assay can be used to screen a

library of compounds for Factor D ligands. The results in Figure 5 also show that

the microplate thermal shift assay is generally applicable to any target molecule.

Example 8
Microplate Thermal Shift Assay of Factor Xa

10   Human Factor Xa, a key enzyme in the blood clotting coagulation

pathway, was chosen as yet another test of the cross target utility of the

microplate thermal shift assay. Factor Xa was purchased from Enzyme research

Labs (South Bend, IN) and diluted to 1.4 μM in assay buffer (50 mM Hepes, pH

7.5, 0.1 M NaCl). The assay volume was 100 μL and the concentration of 1,8-

15   ANS was 100 μM. The protein was heated in two degree increments between

50°C to 80° C using a Robocycler™ temperature cycler. After each heating step,

prior to fluorescence scanning using the CytoFluor II™ fluorescence plate reader,

the sample was cooled to 25°C (see Example 1). The results of a microplate

thermal shift assay of Factor Xa is shown in Figure 6. A thermal unfolding

20   transition was observed at 338K (65°C). Data analysis was described as

described for Figure 3. The results in Figure 6 show that the microplate thermal

shift assay of protein stability is generally applicable to any target molecule.

Example 9
Miniaturization of the Microplate Thermal Shift Assay of
Ligands Binding to Human α-Thrombin

25

A miniaturized form of the microplate thermal shift assay was developed

to minimize the amount of valuable therapeutic protein and ligands required for

the assay. In the first attempt at decreasing the assay volume, the assay volume

-83-

was decreased from 100 μL to 50 μL without adversely affecting the fluorescent signal. When the assay volume was reduced further by a factor of ten, to 5 μL, favorable results were obtained for human α-thrombin. As shown in Figure 7, the human α-thrombin unfolding transition could be easily observed at its usual T_m.

5   More importantly, an active site inhibitor was observed to shift the T_m of the unfolding transition by 8.3°K to yield an estimate of the K_d of 15 nM at the T_m. The K_a at T_m was calculated using the relationship:

$$K_L^{T_m} = \frac{\exp\left\{-\frac{\Delta H_u^{T_0}}{R}\left[\frac{1}{T_m} - \frac{1}{T_0}\right] + \frac{\Delta C_{pu}}{R}\left[\ln\left(\frac{T_m}{T_0}\right) + \frac{T_0}{T_m} - 1\right]\right\}}{[L_{T_m}]} \qquad \text{(equation 1)}$$

where $K_L^{T_m}$ = K_a at T_m (ligand associate constant at T_m)

T_m =   332.2°K (midpoint of the unfolding transition in the absence of a
10   ligand)

T_0 =   323.9°K

$\Delta H_u^{T_0}$ =   200.0 kcal/mol (enthalpy of unfolding for pre thrombin observed by Lentz et al., 1994)

15 ΔC_{pu} =   2.0 kcal/mol (estimated change in heat capacity of unfolding for human α-thrombin)

L_{T_m} =   50.0 μM

The Kd at temperatures near 25 or 37°C will be of higher affinity if the
20 enthalpy of binding, ΔH_b, is negative for this ligand. Using a spectrophotometric assay, an apparent K_i of approximately 8 nM was observed at 37°C (310°K).

The measurements shown in Figure 7 were obtained using the CytoFluor II fluorescence plate reader (PerSeptive Biosystems, Framingham, MA). In the experiment, the excitation wavelength of light was 360 nm and the emission was
25 measured at 460 nm. The microplates employed for this miniaturized assay were

-84-

either the conventional polycarbonate V-bottom 96 well plate (Stratagene, or

Costar) or polycarbonate plates that contain 15 µL dimples in an 8 x 12 array

(Costar plate lids). In the reaction, the concentration of human α-thrombin was

µM in assay buffer (50 mM Hepes, pH 7.5, 0.1 M NaCl). The assay volume was

5   5 µL and the concentration of 1,8-ANS was 100 µM. The protein was heated in

two degree increments between 44°C to 64° C using a Robocycler™ temperature

cycler. After each heating step, and prior to fluorescence scanning using the

CytoFluor II™ fluorescence plate reader the sample was cooled to 25°C for 30

seconds (see Example 1). The non-linear least squares curve fitting and other

10   data analysis were performed as described for Figure 3.

Example 10
Miniaturization of the Microplate Thermal Shift Assay
of Ligands Binding to D(II) FGFR1

       Recombinant D(II) FGFR1 was purified from inclusion bodies and

15   purified by affinity chromatography on heparin sepharose. A stock solution of

D(II) FGFR1 (15 mg/mL; 1.1 mM) was diluted to 50 µM in assay buffer (50 mM

Hepes, pH 7.5, 0.1 M NaCl). The assay volume was 10 µL and the concentration

of 1,8-ANS was 250 µM. The unfolding transition in the absence of ligands was

found to be about 312 K (39°C) as shown in Figure 8. In the presence of the

20   heparin mimic aprosulate (300 uM), the unfoding transition was observed to

increase by about 8 K to about 320 K. Using this temperature midpoint T_m, it is

possible to estimate the binding affinity of aprosulate to D(II)FGFR1 to be about

18 µM at the T_m (Table 6). These results demonstrate the ability of the

microplate thermal shift assay to estimate ligand binding affinity to a non-enzyme

25   target molecule.

Example 11
Miniaturization of the Microplate Thermal Shift Assay
of Urokinase

       Another target molecule analyzed was human urokinase-type plasminogen

30   activator (u-PA). U-PA enzymatically converts plasminogen into the active

-85-

protease plasmin. U-PA is involved in tissue remodeling, cellular migration and metastases. The gene for u-PA was obtained from ATCC (Rockville, MD) and modified to appropriately express active enzyme in *E. coli*. u-PA was cloned, overexpressed in *E. coli*, and purified using procedures similar to those described

5   by Winkler *et al.* (*Biochemistry 25*:4041-4045 (1986)). The last step of u-PA purification was performed in the presence of the active site inhibitor glu-gly-arg-chloromethylketone (CMK) and hence the u-PA utilized for this experiment was the CMK-u-PA complex. The experiment was performed in the miniaturized format in 5 µL well volume. One µL of concentrated CMK-u-PA (13 g/L, 371.4

10   µM) was added to 4 µL of 62.5 mM MOPS, pH 7, 125 mM NaCl, and 250 µM 1,8-ANS, in multiple wells of a 96-well polycarbonate V-bottom microtiter plate. A thermal denaturation curve was generated as previously described for thrombin, aFGF, D(II)FGFR1, Factor D, and Factor Xa, by incremental heating of the microplate followed by a fluorescence reading after each temperature increase.

15   Analysis and non-linear least squares fitting of the data for this experiment show that the T_m for CMK-u-PA under these conditions is 81 °C, which is considerably higher than that seen for thrombin, aFGF, D(II)FGFR1, Factor D, and Factor Xa (55,44,40, 51, 55, and 65°C, respectively). This experiment demonstrates the utility of the current invention in determining the T_m for relatively thermostable

20   proteins or proteins stabilized by the high affinity binding of ligand(s) and further demonstrates the ability to perform such an experiment in a miniaturized format.

Example 12
Further Miniaturization of the Microplate Thermal Shift Assay of Human α-thrombin

25   A stock thrombin solution was diluted to 1 µM in 50 mM Hepes, pH 7.5, 0.1 M NaCl and 100 µM 1,8-ANS. An electronic multi-channel pipettor was used to dispense either 2 µL or 5 µL of diluted thrombin solution into wells of a 96-well polycarbonate microtiter plat. The plate was subjected to 3 minutes of heating in a thermal block capable of establishing a temperature gradient across

30   the microplate, followed by 30 seconds cooling to 25°C, and subsequent reading in the CytoFluor II fluorescence plate reader. Data were analyzed by non-linear

-86-

least squares fitting and plotted as shown in Figures 10 and 11. Each curve
represents a replicate experiment. Standard deviations for T_m determinations
were very good for experiments utilizing either 5 µL or 2 µL volumes (+/- 1.73
and +/- 0.90 K, respectively), demonstrating the ability of the current invention
5   to operate at very low volumes. In fact, the volume which one could employ in
the current invention seems to be limited only by the technology available to
dispense small volumes accurately.

The assay volume was reduced to 2 µL, as shown for human α-thrombin
(1.0 µM) in Figure 11. Reproducible pipetting of 2 µL in a 96 well array requires
10   the employment of specialized pipetting tools such as the multi-channel pipettor
available from Matrix Technologies Corp. (Lowell, MA) which has ±2.0% or
0.15 µL precision and ±2.5% or 0.15 µL accuracy for volumes 0.5 to 12.5 µL.

Example 13
Single Temperature Mode of the Microplate Thermal Shift Assay

15   Results of a single temperature assay are shown in Figure 12. The
compounds 3DP-3811, 3DP-3959, 3DP-4076, and 3DP-4660 bind to the active
site of human α-thrombin. The K_i's (enzymatically determined) of these four
compounds for human α-thrombin are of 20,000 nM, 250 nM, 25nM, and 8 nM,
respectively. Each of these four compounds were equilibrated with human α-
20   thrombin in separate 5 µl assay volumes in a 96 well plate. The final ligand
concentration was 50 µM.

For the ligands that bind to human α-thrombin with higher affinity, low
levels of fluorescence emission were observed, relative to the control reaction
(human α-thrombin alone) at 55°C. The result for the sample containing the
25   weakly binding ligand 3DP-3811 was little different from the result obtained for
the control sample. The decrease in fluorescence emission for 3DP-4076 was not
as large as expected, given its high affinity (K_i of 25 nM) for human α-thrombin.
This result could be due in part to the lower solubility of chloride salts of this
compound.

-87-

The data in Figure 12 clearly demonstrate the utility of the single temperature embodiment of the microplate thermal shift assay for quickly identifying ligands with binding affinities (K_d's) of 250 nM or better when the ligand concentration is 50 μM.

5

Example 14
Microplate Thermal Shift Assay of Intrinsic Protein
Tryptophan Fluorescence Emission

The intrinsic Trp fluorescence of human α-thrombin was assayed in a microplate thermal shift assay.   100 μL samples contained 2 μM human α-
10   thrombin. The samples were exposed to light from a Xenon-Arc lamp at 280 nm. Emission was detected at 350 nm using the BioLumin 960 (Molecular Dynamics). Temperature cycling, between 44°C and 66°C, was performed as described in previous examples. The results of the assay are shown in Figures 13 and 14. A small increase in fluorescence emission was observed at 350 nm with
15   increasing temperature. However, this increase in fluorescence emission was barely detectable above the level of fluorescence in the blank wells that contained no protein (Figure 13). Subtracting an average blank improved the signal to noise ratio (Figure 14), but the observed unfolding transition was different from that typically observed in assays employing 1,8-ANS. In contrast to the transition
20   observed using 1,8-ANS, the transition in Figure 14 appears broader and has a midpoint temperature T_m at 334.4 ± 5.1 °K, some five degrees higher than the T_m observed for human α-thrombin in assays performed with 1,8-ANS.

Example 15
Assay of Multi-Ligand Binding Interactions

25   As previously demonstrated, the thermal shift assay can be used for the screening of ligands for binding to single sites on target proteins. In light of the underlying physical principles upon which the microplate thermal shift assay is based, the near additivity of the free energy of ligand binding and protein unfolding, it is possible to employ the microplate thermal shift assay for

-88-

analyzing multi-ligand binding interactions with a target protein. If the free energy of binding of different ligands binding to the same protein are nearly additive, then one can analyze multi-ligand binding systems, whether the ligands bind in a cooperative (positive) fashion or a non-cooperative (negative) fashion.

5   Multiple ligand binding to human α-thrombin was assayed in a microplate thermal shift assay. Human α-thrombin it has at least four different ligand binding sites: (1) the catalytic binding site; (2) the fibrin binding site (exosite I); (3) the heparin binding site (exosite II); and (4) the Na^+ binding site, located ~15Å from the catalytic site. First, independent binding of three individual

10   ligands was assayed: 3DP-4660, Hirugen (hirudin 53-64) (Bachem), and heparin 5000 (CalBiochem). These ligands bind to the catalytic site, the fibrin binding site and the heparin binding site, respectively.

          A stock thrombin solution was diluted to 1 µM in 50 mM Hepes, pH 7.5, 0.1 M NaCl, 1 mM $CaCl_2$, and 100 µM 1,8-ANS. Each thrombin ligand was

15   included singly and in various combinations to 1 µM thrombin solutions at final concentrations of 50 µM each, except for heparin 5000, which was 200 µM. 100 µL of thrombin or thrombin/ligand(s) solution was dispensed into wells of a 96-well V-bottom polycarbonate microtiter plate. The plate was subjected to 3 minutes of heating in a thermal block capable of establishing a temperature

20   gradient across the microplate, followed by 30 seconds cooling at 25°C, and subsequent reading in a fluorescence plate reader. Data were analyzed by non-linear least squares fitting.

          The results of these individual binding reactions are shown in Figures 15 and 16. The rank order of binding affinity was 3DP-4660 > Hirugen > heparin

25   5000, corresponding to K_d values of 15 nM, 185 nM and 3434 nM, respectively, for the ligands binding at each T_m (see Equation (4)).

          The results reveal thermal unfolding shifts that are slightly smaller than would be expected if the free energies of binding were fully additive. For example, Hirugen alone displays a ΔT_m of 5.8°C, and 3DP-4660 alone displays

30   a ΔT_m of 7.7°C. In combination, however, Hirugen and 3DP-4660 display a ΔT_m of 12.2°C. This result means that the binding affinity of one or both ligands is diminished when both ligands are bound, and is an example of negative

-89-

cooperativity in binding between the fibrin and catalytic binding sites. Such a negatively cooperative effect is consistent with the human α-thrombin literature, in which the kinetics of hydrolysis of various chromogenic substrates were found to depend upon ligands binding to exosite I. Indeed, a 60% decrease in K_m for the hydrolysis of D-phenylalanylpipecolyl arginyl-p-nitroanilide was observed when Hirugen was present (Dennis *et al.*, *Eur. J. Biochem.* *188*:61-66 (1990)). Moreover, there is also structural evidence for cooperativity between the catalytic site and exosite I. A comparison of the isomorphous structures of human α-thrombin bound to PPACK (a human α-thrombin catalytic site inhibitor) and Hirugen revealed conformational changes that occur at the active site as a result of Hirugen binding at the exosite I (Vijayalakshmi *et al.*, *Protein Science 3*:2254-2271 (1994)). Thus, in the microplate thermal shift assay, the apparent cooperativity observed between the catalytic center and the exosite I is consistent with functional and structural data in the literature.

Similarly, when the binding of all three ligands was assayed, a ΔT_m of 12.9°C was observed (Figure 16). If the free energies of binding were fully additive, one would expect to observe a ΔT_m of 17.7°C. The observed result means that further negative cooperativity occurs via ligand binding at all three protein binding sites. This result is consistent with the literature. In a ternary complex with heparin and fibrin monomer, human α-thrombin has decreased activity toward tri-peptide chromogenic substrates and pro-thrombin (Hogg & Jackson, *J. Biol. Chem.* *265*:248-255 (1990)), and markedly reduced reactivity with anti-thrombin (Hogg & Jackson, *Proc. Natl. Acad. Sci. USA 86*:3619-3623 (1989)). Also, recent observations indicate that ternary complexes also form in plasma and markedly compromise heparin anticoagulant activity (Hotchkiss *et al.*, *Blood 84*:498-503 (1994)). A summary of these multi-ligand binding results is shown in Table 7.

The results in Figure 15, Figure 16, Table 7 illustrate the following advantages of using the microplate thermal shift assay to perform multi-variable analyses. First, the same microplate thermal shift assay can be used to simultaneously detect the binding of multiple ligands at multiple binding sites in a target protein. Second, the microplate thermal shift assay can be used to detect

-90-

the same ligand binding to two or more sites in a therapeutic target. Third, the microplate thermal shift assay affords the detection of cooperativity in ligand binding. Information about ligand binding cooperativity can be collected and analyzed very quickly. Thus, multi-ligand binding experiments that would take months to perform using alternative technologies take only hours to perform using the microplate thermal shift assay.

Table 7. Microplate thermal shift assay for Ligands Binding to the Active Site, Exosite, and Heparin Binding Site of Human α-thrombin

Protein/Ligand	[Ligand] (μM)	T_m (°K)	ΔT_m (°K)	K_d at T_m[a] (nM)	K_d at 298°[b] (nM)
Thrombin (TH)	none	323.75	0.0		
TH/Heparin 5000	200	327.95	4.2	3434	470
TH/Hirudin 53-65	50	329.52	5.8	185	23
TH/3dp-4660	50	331.40	7.7	29	3
TH/Heparin 5000	200	327.95			
TH/Hep./Hir.	50	330.57	2.6	4254	478
TH/Heparin 5000	200	327.95			
TH/Hep.3dp 4660	50	333.20	5.3	350	32
TH/Hirudin 53-65	50	329.52			
TH/Hir./Hep.	200	330.57	1.1	75422	8467
TH/Hirudin 53-65	50	329.52			
TH/Hir.3dp-4660	50	335.97	6.5	117	9
TH/3dp-4660	50	331.40			
TH/3dp-4660/Hep	200	333.20	1.8	38205	351
TH/3dp-4660	50	331.40			
TH/3dp-4660/Hir.	50	335.97	4.6	731	54

[a]Calculations for K_d at T_m were made using equation (1) with $\Delta H_u^{T^o}$ = 200.0 kcal/mole, as observed for pre-thrombin 1 by Lentz et al., (1994), and an estimated ΔC_{pu} = 2.0 kcal/mole - °K; and K_d = 1/ K_a.

[b]Estimates for K_d at T = 298°K were made using the equation (3), where ΔH_L^T is estimated to be -10.0 kcal/mole.

Example 16
Screening Biochemical Conditions that Increase Human α-thrombin Stability

The microplate thermal shift assay was used, with four different fluorophores, to simultaneously screen the effects of multiple pH values, sodium chloride concentrations, and reduction-oxidation compounds on human α-thrombin stability. Thrombin solution was diluted to 1 μM in 50 mM Hepes, pH 7.5, NaCl at either 0.1 M or 0.5 M, 10 mM EDTA, 10 mM $CaCl_2$, 10 mM dithiothreitol, 10 1 mM $CaCl_2$, and 100 μM 1,8-ANS, 10% (v/v) glycerol, or 0.1% (w/v) polyethylene glycol (PEG) 6000. Reaction volume was 100 μL.

The results of these multi-variable experiments are shown in Figures 17A-D and Figure 18. Figures 17A-D summarize the stability data collected in a single 96 well plate for human α-thrombin. In Figure 17A, the fluorophore is 1,8-ANS. In Figure 17B, the fluorophore is 2,6-ANS. In Figure 17C, the fluorophore is 2,6-TNS. In Figure 17D, the fluorophore is bis-ANS. The results in Figures 17A-D show a pH optimum of about 7.0 and an increase in stability with increasing NaCl concentration. A ΔT_m of about 12°C was observed when the NaCl concentration was increased from 0 to 0.5 M. Figure 18 shows a stabilizing effect of 10% glycerol and a destabilizing effect of dithiothreitol. From Figures 17A-D and 18 is evident that the flourophores 1,8-ANS and 2,6-TNS are most effective in the microplate thermal shift assay.

The stabilizing effect of NaCl is particularly interesting since there are recent reports in the literature of a weak Na^+ binding site (K_d of 30±3 mM in 5 mM Tris buffer pH 8.0, 0.1% PEG, 25°C) approximately 15 Å from the catalytic center of thrombin (Dang *et al.*, *Nature Biotechnology* 15:146-149 (1997)). Using equation (1), it is possible to estimate the NaCl binding to be ~6 mM near the T_m (53°C) in 50 mM Hepes pH 8.0 buffer (zero and 0.10 M NaCl).

The additional stabilization that occurs at a NaCl concentration of greater than 0.10 M may come from additional Na^+ and/or Cl^- binding events summed over the entire structure of human α-thrombin. Alternatively, the source of this further stabilization may come from less specific salting out effect that is usually observed at 0.5 to 2 M NaCl and is due to the preferential hydration of proteins induced by salts (Timasheff & Arakawa, In: *Protein Structure, A Practical*

-92-

Approach, T.E. Creighton, ed., IRL Press, Oxford, UK (1989), pp. 331-354)).

The stabilizing effect of glycerol on proteins has been attributed to a balance between the preferential exclusion of glycerol (i.e. preferential hydration of proteins) and the specific binding to polar regions on the surface of proteins (Timasheff & Arakawa, In: *Protein Structure, A Practical Approach*, T.E. Creighton, ed., IRL Press, Oxford, UK (1989), pp. 331-354)).

Example 17
Screening Biochemical Conditions that Increase D(II) FGF Receptor 1
Stability

The microplate thermal shift assay was used to simultaneously screen the effects of multiple biochemical conditions on D(II) FGF receptor 1 stability. The assays were performed by mixing 1 μL of D(II) FGFR1 (from a 500 μM concentrated stock in 50 mM HEPES pH 7.5) with 4 μL of each biochemical condition in wells of a 96-well polycarbonate microtiter plate. Final protein concentration after mixing was 100 μM and final 1,8-ANS concentration was 200 μM. Biochemical conditions were tested as follows: The pH's tested were 5 (Na acetate), 6 (MES), 7 (MOPS), 8 (HEPES), and 9 (CHES), with final buffer concentrations of 50 mM.

The salt concentrations tested were 0.1 or 0.5 M NaCl. Additives were tested in 50 mM MOPS, pH 7, 0.1 M NaCl, at final concentrations of 1 mM (EDTA, dithiothreitol), 10 mM (CaCl$_2$, MgCl$_2$, MgSO$_4$, NiSO$_4$), 50 mM (arginine), 100 mM ((NH$_4$)$_2$SO$_4$, LiSO$_4$, Na$_2$SO$_4$, ZnSO$_4$), 5% w/v (polyethylene glycol 6000), and 10% v/v glycerol.

Thermal denaturation profiles were generated as previously described for thrombin, aFGF, Factor D, and Factor Xa, by incremental heating of the microplate followed by a fluorescence reading after each temperature increase. Data were analyzed by non-linear least squares fitting as described previously.

The results of these multi-variable experiments are shown in Figures 19-24. As shown in Figure 19, stability increased with increasing NaCl concentration. A ΔT$_m$ of about 5°C was observed as NaCl concentration was increased from 0.1 to 0.5 M. As shown in Figure 20, both MgSO$_4$ and arginine

stabilized the protein. As shown in Figure 21, 10% glycerol stabilized the protein. Further, salts of the Hofmeister series such as Li_2SO_4, $Na SO_4$ $(NH_4)_2SO_4$ and Mg_2SO_4 all had stabilizing effects (Figure 21). As shown in Figure 22, dithiothreitol destabililzed the protein. These results are not very different form that of human α-thrombin. As shown in Figure 23, a pH optimum of about 8.0 was observed. The relative stabilizing effects of EDTA, $CaCl_2$,, $MgCl_2$, $MgSO_4$, arginine, $(NH_4)SO_4$, $Li SO_4$, $Na SO_4$, glycerol, polyethylene glycol 6000, and dithiothreitol are shown in Figure 24.

Example 18
Screening Biochemical Conditions that Increase Urokinase Stability

The microplate thermal shift assay was used to simultaneously screen the effects of multiple biochemical conditions on human urokinase stability. This experiment was performed by mixing 1 µL of urokinase (from a 371 5M concentrated stock in 20 mM Tris pH 8) with 4 µL of each biochemical condition in wells of a 96-well polycarbonate microtiter plate. Final protein concentration after mixing was 74 µM and final 1,8-ANS concentration was 200 µM. Biochemical conditions were tested as follows: The pH's tested were 5 (acetate), 6 (MES), 7 (MOPS), 8 (HEPES), and 9 (CHES) with final buffer concentrations of 50 mM. The salt concentrations tested were 0.1 or 0.5 M NaCl. Glycerol was tested at 10% v/v in 50 mM MOPS, pH 7, 0.1 M NaCl.

Thermal denaturation profiles were generated as previously described for thrombin, aFGF, Factor D, D(II) FGFR1, and Factor Xa, by incremental heating of the microplate followed by a fluorescence reading after each temperature increase. Data were analyzed by non-linear least squares fitting as described previously.

The results of these multi-variable experiments are shown in Figure 25. A pH optimum of about 7.0 was observed. Increasing concentrations of sodium chloride stabilized the protein. 10% glycerol also stabilized the protein. These results are consistent with the results reported in the literature (Timasheff &

-94-

Arakawa, In: *Protein Structure, A Practical Approach*, T.E. Creighton, ed., IRL Press, Oxford, UK (1989), pp. 331-354).

Figures 17-25 illustrate the advantage of using the microplate thermal
shift assay to simultaneously screen for multi-variable biochemical conditions
5   that optimize protein stability. Using the methods and apparatus of the present
invention, one can rapidly screen large arrays of biochemical conditions for
conditions that influence the stability of proteins. Thus, the present invention can
be used to rapidly identify biochemical conditions that optimize protein shelf-life.

Example 19
10   *Screening Biochemical Conditions that Facilitate
Protein Folding*

Factorial experiments were performed to identify biochemical conditions
that increased the yield of correctly folded His_6-D(II)-FGFR1. His_6-D(II)-FGFR1
is recombinant D(II) FGF receptor 1 protein, to which a polyhistidine tag is
15   attached to the N-terminus. The results are summarized in Table 8. When the
final guanidinium hydrochloride concentration was 0.38 M, a refolded protein
yield of 13.5±0.2% was obtained at pH 8.0 and 0.5 M NaCl. This yield could be
increased to 15.5±0.3% if glycerol was present at 7% (v/v). A further increase in
His_6-D(II)-FGFR1 refolding yield to about 18% was observed when the pH was
20   increased to 8.9. In fact, increasing the pH from 8.0 to 8.9 improved the yields
in all experiments. These results demonstrate that a pH between 8 and 9, and 7%
glycerol, are two important conditions that facilitate D(II)-FGFR1 folding. Each
of these conditions increased the folded protein yield by about 15 to 20% over the
starting conditions at pH 8.0 and 0.5 M NaCl.

25   Importantly, the effects of pH and glycerol appear to be nearly additive.
The increased yield of refolded protein at pH 8.9 and 7% glycerol was found to
be 17.8 %, 32% higher than the yield obtained at a pH 8.0 and 0.5 M NaCl (13.5
± 0.2% yield). The near additivity of refolding determinants has important
consequences since it suggests that the small individual free energy components
30   that comprise the overall free energy of folding can be incrementally combined
to optimize the yield of folded protein.

Table 8. Factorial Experiment to Optimize the Protein Folding Yield for Immobilized His$_6$D(II)-FGFRl at a final Gdn-HCl concentration of 0.38 M[a]

	500 mM NaCl	50 mM NaCl	7% Glycerol/ 50 mM NaCl
pH 8.0	13.3%[b]	9.3%	15.1%
pH 8.0	13.6%	9.4%	15.8%
pH 8.9	16.1%	13.5%	17.8%
pH 8.9		10.3%	17.8%

[a] Refolding was initiated by diluting a 3.2 mL suspension of Ni^{2+}NTA / 6M Gdn-HCl to 50 mL in the respective refolding buffers (1:15.6 dilution) so that the final Gdn-HCl concentration was 0.38 M.

[b] Yields are based on measured A$_{280}$ values for fractions eluted off a Heparin Sepharose column. The immobilized protein concentration was 1.2 mg/mL, as measured by a Bio-Rad protein assay. Since the column size was 21 mL, 25.2 mg of D(II) FGFR1 was bound to the resin.

Results of a second round of refolding experiments at a final Gdn-HCl concentration of 0.09 M revealed that the Gdn-HCl is an even more important factor affecting the folding of His$_6$-D(II)FGFR1 (Table 9). At pH 8.0 and 0.5 M NaCl, decreasing the Gdn-HCl concentration to 0.09 M doubled the refolded protein yield, relative to the yield obtained at pH 8.0, 0.5 M NaCl, and 0.38 M Gdn-HCl (Table 9). In accordance with the results obtained at a Gdn-HCl concentration of 0.38 M, the yield of refolded His$_6$-D(II)-FGFR1 in 0.09 M Gdn-HCl was also increased in the presence of glycerol. These results suggest that the improved yield of refolded His$_6$D(II)-FGFR1 in glycerol (5 to 10%) and lower Gdn-HCl concentration are additive. Further, the results in Table 9 reveal that the Hofmeister salt Na$_2$SO$_4$ increases the yield of refolded protein almost as well as 5 to 10 % glycerol.

Table 9. Factorial Experiment to Optimize the Protein Folding Yield for Immobilized His$_6$D(II)-FGFR1. Final Gdn-HCl of 0.09 M[a]

	500 mM NaCl	50 mM NaCl	5% Glycerol 50 mM NaCl	10% Glycerol 50 mM NaCl	100 mM Na$_2$SO$_4$	300 mM Na$_2$SO$_4$
pH 8.0	25.6%[b]	29.7%	36.5%	35.6%	32.2%	33.4%

[a] Refolding was initiated by diluting a 7.5 mL suspension of Ni^{2+}NTA / 6M Gdn-HCl to 50 mL in the respective refolding buffers (1:6.7 dilution) so that the final Gdn-HCl concentration was 0.09 M.

[b] Yields are based on measured A$_{280}$ values for fractions eluted off a Heparin Sepharose column. The immobilized protein concentration was 1.6 mg/mL, as measured by Bio-Rad protein assay. Since the column size was 20 mL, 32 mg of D(II) FGFR1 was bound to the resin.

Upon comparison of the biochemical conditions that increase the yield of refolded Ni^{2+}NTA bound His$_6$-D(II)-FGFR1 (Tables 8 and 9) and those conditions that increase the overall protein stability of His$_6$-D(II)-FGFR1 (Figures 19-24), it is clear that there is a strong correlation between the protein folding results and the protein stability results. Glycerol, salts of the Hofmeister series, and pH 8.5 to 8.9 improve protein folding yield and overall protein stability of His$_6$-D(II)-FGFR1.

These results are consistent with the model of protein folding in Figure 26. If the aggregation of unfolded His$_6$-D(II)-FGFR1 is suppressed when immobilized to Ni^{2+}NTA, and a simple two state equilibrium exists between U and N, then the factors that influence the relative position of the equilibrium between U and N should be the same whether one starts from U (in the refolding experiment) or start from N (in the microplate thermal shift assay protein stability screen). Since thermodynamics are path independent, only the initial and final states of this reaction should be important. Since similar biochemical conditions facilitate protein stability and folded protein yield, the simple model for protein folding depicted in Figure 26 is accurate for this protein. Thus, the microplate thermal shift assay can serve as a rapid and general method for screening biochemical conditions that optimize protein folding.

-97-

Example 20

Figure 28 shows the results of microplate thermal shift assays of using each of four fluorescence probe molecules: bis-ANS, 2,6-TNS, 1,8-TNS, and 2,6-ANS. Thrombin solution was diluted to 1 µM in 50 mM Hepes, pH 7.5, and 0.1 M NaCl.

Example 21
Comparison of Assay Results for a Fluorescence Scanner and a Charge
Coupled Device Camera

A Gel Documentation and Analysis System (Alpha Innotech Corp., San Leandro, CA) was used to perform a microplate thermal shift assay. This system uses a CCD camera to detect fluorescence emission from stained gels, dot blot assays, and 96 well plates. The excitatory light source was a long wavelength UV trans-illumination box located directly below the CCD camera. The 96 well plate to be assayed was placed on the trans-illumination box within the focal viewing area of the CCD camera (21 x 26 cm).

A 2 µM solution of human α-thrombin was prepared in 50 mM Hepes, pH 7.5, 0.1 M NaCl by diluting a 34 µM stock solution (1:17) of purified human α-thrombin (Enzyme Research Labs, Madison, WI). The human α-thrombin solution also contained 100 µM 1,8-ANS. 100 µL of the human α-thrombin-1,8-ANS solution was aliquoted into each of twelve wells of a single row (row A) of a V-bottom polycarbonate microplate (Costar). A gradient block (RoboCycler™, Stratagene) was used to heat the twelve samples, from 44 to 66°C, across the rows of the microplate. i.e. a temperature gradient of 2°C per well was established. Thus, well A1 was at 66°C and well A12 was at 44°C. The control solution that contained 100 µM 1,8 ANS in the same buffer (no protein) was placed in each of wells B1 to B12. After adding a drop of mineral oil to each well to prevent evaporation, the plate was heated on the gradient block for 3 min. The contents of each well were then allowed to reach room temperature and transferred to a flat bottom microplate.

In this experiment, no filters were employed to narrow the excitatory wavelength
to ~360 nm and the emission wavelength to ~460 nm, which are optimal
wavelengths for the 1,8 ANS fluorophore. The flat bottom plate was then placed
on the near UV transillumination box and the CCD camera was used to measure

5   the amount of emitted light. The plate was also read using a conventional
fluorescence plate reader (CytoFluor II), in order to compare the results obtained
by the two different detection methods. The results for the two detection methods
are plotted in Figure 40. The results in Figure 40 show that the CCD camera is
useful as a fluorescence emission detector for monitoring the unfolding of a

10   protein in the microplate thermal shift assay.

Example 22
Microplate Thermal Shift Assay Using a Charge Coupled Device Camera

An emission filter was used to block out all stray light outside the region
of the emission region for 1,8-ANS (~460 nm). In addition, the 5 μL

15   miniaturized form of the microplate thermal shift assay was employed to test the
CCD camera detection method in this configuration. Both the polycarbonate V-
bottom and dimple plates were tested. The experiment was essentially the same
as described in Example 21, except that the volume of the assay was 5 μL in
either the V-bottom or dimple 96 well plates. The temperature range was 44 to

20   66°C (right to left) for the V-bottom plate, and 46 to 70°C (right to left) for the
dimple plate. Photographs of the CCD images are shown in Figure 41. The V-
bottom well microplate image is shown in Figure 41A. The dimple plate image
is shown in Figure 41B. The results obtained from the plate in Figure 41A is
shown in Figure 42. The results in Figure 42 show that data obtained using a

25   CCD camera compare very well with data obtained using a fluorescence plate
reader that employs a photo-multiplier tube (PMT) for fluorescence detection.

All publications and patents mentioned hereinabove are hereby
incorporated in their entireties by reference.

While the foregoing invention has been described in some detail for

30   purposes of clarity and understanding, it will be appreciated by one skilled in the

-99-

art from a reading of this disclosure that various changes in form and detail can be made without departing from the true scope of the invention and appended claims.

- 100 -

What is claimed is:

1.   A multi-variable method for ranking the efficacy of one or more of a multiplicity of different molecules or one or more of a multiplicity of different biochemical conditions for stabilizing a target molecule which is capable of unfolding due to a thermal change, which comprises

(a)   contacting said target molecule with one or more of said multiplicity of different molecules or one or more of said multiplicity of different biochemical conditions in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating;

(d)   generating a thermal unfolding curve for said target molecule as a function of temperature for each of said wells;

(e)   comparing each of said unfolding curves in step (d) to (i) each of said other unfolding curves and to (ii) the unfolding curve obtained for said target molecule under a reference set of biochemical conditions or in the absence of any of said molecules in said multiplicity of different molecules; and

(f)   ranking the efficacies of said multiplicity of different molecules or said multiplicity of different biochemical conditions according to the change in each of said thermal unfolding curves.

SUBSTITUTE SHEET   AMENDED SHEET

- 101 -

2.   The method of claim 1, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

3.   The method of claim 1, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said different molecules or obtained under a reference set of biochemical conditions; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said multiplicity of different molecules or said multiplicity of different biochemical conditions according to the change in T_m of each of said thermal unfolding curves.

4.   The method of claim 1, wherein said target molecule is a protein.

5.   The method of claim 1, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said wells.

6.   The method of claim 4, wherein said step (a) comprises contacting said protein with said one or more different molecules or different biochemical conditions, in

SUBSTITUTE SHEET

AMENDED SHEET

- 102 -

the presence of a fluorescence probe molecule present in each of said multiplicity of wells

and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of

wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells .

7.   The method of claim 6, wherein said fluorescence is fluorescence emission.

8.   The method of claim 1, wherein said target molecule is a nucleic acid.

9.   The method of claim 8, wherein said step (c) comprises measuring the

change in hyperchromicity of said nucleic acid.

10.   The method of claim 8, wherein said target molecule is a fluorescently

labeled double-stranded oligonucleotide.

11.   The method of claim 10, wherein one strand of said oligonucleotide

contains a donor fluorophore and the other strand of said oligonucleotide contains an

acceptor fluorophore.

12.   The method of claim 10, wherein said step (a) comprises contacting said

oligonucleotide with said multiplicity of different molecules, or with said multiplicity of

SUBSTITUTE SHEET

AMENDED SHEET

- 103 -

different biochemical conditions, in each of said multiplicity of wells, and wherein said step (c) comprises

(c1) exciting said donor fluorophore, in each of said multiplicity of wells, with light; and

(c2) measuring the fluorescence from said acceptor fluorophore in each of said multiplicity of wells.

13. The method of claim 12, wherein said fluorescence is fluorescence emission.

14. The method of claim 6, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells one well at a time.

15. The method of claim 6, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

16. The method of claim 6, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells simultaneously.

17. The method of claim 4, wherein said step (c) comprises

(c1) exciting tryptophan residues in said protein, in each of said multiplicity of wells, with light; and

(c2) measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

18.   The method of claim 17, wherein said fluorescence is fluorescence emission.

19.   A multi-variable method for ranking the affinity of one or more combinations of a multiplicity of different molecules for a target molecule which is capable of unfolding due to a thermal change, which comprises

(a)   contacting said target molecule with a combination of two or more different molecules of said multiplicity of different molecules in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating;

(d)   generating a thermal unfolding curve for said target molecule as a function of temperature for each of said wells;

(e)   comparing each of said thermal unfolding curves in step (d) with (i) each of said other thermal unfolding curves obtained for said target molecule and to (ii) the thermal unfolding curve for said target molecule in the absence of any of said molecules in said multiplicity of different molecules; and

(f)   ranking the affinities of said combinations of different molecules for said target molecule according to the change each of said thermal unfolding curves.

20.   The method of claim 19, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

SUBSTITUTE SHEET

AMENDED SHEET

- 105 -

21.   The method of claim 19, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said combinations of different molecules according to the change in T_m of each of said thermal unfolding curves.

22.   The method of claim 19, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said multiplicity of wells.

23.   The method of claim 19, wherein said target molecule is a protein.

24.   The method of claim 19, wherein said step (a) comprises contacting said target molecule with said combinations of said multiplicity of different molecules, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

AMENDED SHEET

- 106 -

25.   The method of claim 24, wherein said fluorescence is fluorescence emission.

26.   The method of claim 19, wherein said target molecule is a nucleic acid.

27.   The method of claim 26, wherein said step (c) comprises measuring the change in hyperchromicity of said nucleic acid.

28.   The method of claim 19, wherein said target molecule is a fluorescently labeled double-stranded oligonucleotide.

29.   The method of claim 19, wherein one strand of said oligonucleotide contains a donor fluorophore and the other strand of said oligonucleotide contains an acceptor fluorophore.

30.   The method of claim 29, wherein said step (a) comprises contacting said oligonucleotide with said combinations of of different molecules in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said donor fluorophore, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from said acceptor fluorophore in each of said multiplicity of.

SUBSTITUTE SHEET

AMENDED SHEET

- 107 -

31.   The method of claim 30, wherein said fluorescence is fluorescence

emission.

32.   The method of claim 24 or 30, wherein said step (c2) further comprises

measuring the fluorescence from said multiplicity of wells one at a time.

33.   The method of claim 24 or 30, wherein said step (c2) further comprises

measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

34.   The method of claim 24 or 30, wherein said step (c2) further comprises

measuring the fluorescence from each of said multiplicity of wells simultaneously.

35.   The method of claim 19, wherein said multiplicity of different molecules

comprises a combinatorial library.

36.   The method of claim 35, wherein said combinatorial library is a

DirectedDiversity® library.

37.   A multi-variable optimization method for ranking the efficacies of one or

more combinations of a multiplicity of different biochemical conditions to facilitate the

folding or refolding of an unfolded protein, which comprises

(a)   placing a sample of said folded or refolded protein in each of a multiplicity

of wells in a microplate, wherein said folded or refolded protein has been previously

SUBSTITUTE SHEET

AMENDED SHEET

- 108 -

folded or refolded according to one or more of a combination of said multiplicity of different biochemical conditions;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said protein resulting from said heating;

(d)   generating a thermal unfolding curve for said protein as a function of temperature for each of said wells;

(e)   comparing each of said unfolding curves in step (d) to (i) each of said other thermal unfolding curves and to (ii) the thermal unfolding curve obtained for said protein in its native form under a reference set of biochemical conditions; and

(f)   ranking the efficacies of said combinations of different folding or refolding conditions according to the change in each of said thermal unfolding curves.

38.   The method of claim 37, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

39.   The method of claim 37, further comprising

(g)   generating combinations of biochemical conditions that increase the magnitude of said physical change, relative to the magnitude of said physical change of each of said thermal unfolding curves in said step (f); and

(h)   repeating said steps (a) through (g) until a combination of biochemical conditions is determined that promotes maximal protein folding or refolding.

SUBSTITUTE SHEET

AMENDED SHEET

- 109 -

40.   The method of claim 37, wherein said step (e) further comprises

(e1)   assessing folded protein yield.

41.   The method of claim 37, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said protein in its native form under a reference set of biochemical conditions; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said combinations of different folding or refolding conditions according to the change in T_m of each of said thermal unfolding curves.

42.   The method of claim 37, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said wells.

43.   The method of claim 37, wherein said step (a) comprises contacting said protein with said combination of different biochemical conditions, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

SUBSTITUTE SHEET

(c2)   measuring the fluorescence from each of said multiplicity of wells.

44.   The method of claim 43, wherein said fluorescence is fluorescence emission.

45.   The method of claim 43, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells one at a time.

46.   The method of claim 43, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

47.   The method of claim 37, wherein said step (c) comprises

(c1)   exciting tryptophan residues in said protein, in each of said multiplicity of wells , with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

48.   The method of claim 47, wherein said fluorescence is fluorescence emission.

49.   A multi-variable optimization method for ranking the efficacies of one or more combinations of a multiplicity of different biochemical conditions to facilitate the folding or refolding of an unfolded protein, which comprises

SUBSTITUTE SHEET

- 111 -

(a)   determining one or more combinations of a multiplicity of different biochemical conditions which promote protein stability;

(b)   folding said unfolded protein under said one or more combinations of biochemical conditions in said step (a) that promote protein stability;

(c)   assessing folded protein yield;

(d)   ranking the efficacies of said combinations of different folding or refolding conditions according to folded protein yield; and

(e)   repeating steps (a) - (d) until a combination of biochemical conditions that promote optimal protein folding or refolding are identified.

50.   The method of claim 49, further comprising

(f)   repeating said steps (a) through (e) until a combination of biochemical conditions is determined that promotes maximal protein folding or refolding.

51.   The method of claim 49, wherein said step (a) further comprises the method of any one of claims 41-47.

52.   The method of claim 51, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

53.   In a recombinant DNA method of producing a protein comprising expressing a protein heterologous to a host, obtaining said protein in an inclusion body in said host, and recovering functional protein from said inclusion body by refolding or

SUBSTITUTE SHEET

- 112 -

renaturing said protein under refolding or renaturing conditions, the improvement which comprises ranking the efficacies of said multiplicity of different sets of refolding or renaturing conditions by the method of claim 37 or 49.

54.   A multi-variable optimization method for ranking the of one or more combinations of a multiplicity of different biochemical conditions for facilitating the crystallization of a protein which is capable of unfolding due to a thermal change, which comprises

(a)   contacting said protein with a combination of said multiplicity of different biochemical conditions in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said protein resulting from said heating;

(d)   generating a thermal unfolding curve for said protein as a function of temperature for each of said wells;

(e)   comparing each of said unfolding curves in step (d) to (i) each of said other thermal unfolding curves and to (ii) the thermal unfolding curve obtained for said protein under a reference set of biochemical conditions; and

(f)   ranking the efficacies of said multiplicity of different biochemical conditions according to the change in each of said thermal unfolding curves.

55.   The method of claim 54, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

SUBSTITUTE SHEET

AMENDED SHEET

- 113 -

56.   The method of claim 54, further comprising

(g)   generating combinations of biochemical conditions that increase the

magnitude of said physical change, relative to the magnitude of said physical change of

each of said thermal unfolding curves in said step (f); and

(h)   repeating said steps (a) through (g) until a combination of biochemical

conditions

is determined that promotes maximal protein crystallization.

57.   The method of claim 54, wherein said step (d) further comprises

determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m

of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding

curve obtained for said protein under a reference set of biochemical conditions; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said combinations of different biochemical

conditions according to the change in T_m of each of said thermal unfolding curves.

58.   The method of claim 54, wherein said step (c) comprises measuring the

absorbance of light by said contents of each of said multiplicity of wells.

59.   The method of claim 54, wherein said step (a) comprises contacting said

target molecule with said combination of different biochemical conditions, in the presence

SUBSTITUTE SHEET

- 114 -

of a fluorescence probe molecule present in each of said multiplicity of wells, and wherein

said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of

wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

60.   The method of claim 59, wherein said fluorescence is fluorescence

emission.

61.   The method of claim 59, wherein said step (c2) further comprises

measuring the fluorescence from said multiplicity of wells one at a time.

62.   The method of claim 59, wherein said step (c2) further comprises

measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

63.   The method of claim 59, wherein said step (c2) further comprises

measuring the fluorescence from each of said multiplicity of wells simultaneously.

64.   The method of claim 54, wherein said step (c) comprises

(c1)   exciting tryptophan residues in said protein, in each of said multiplicity of

wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

- 115 -

65.   The method of claim 64, wherein said fluorescence is fluorescence emission.

66.   A method for ranking the affinity of each of a multiplicity of different molecules for a target molecule which is capable of unfolding due to a thermal change, which comprises

(a)   contacting said target molecule with one molecule of said multiplicity of different molecules in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating;

(d)   generating a thermal unfolding curve for said target molecule as a function of temperature for each of said wells;

(e)   comparing each of said thermal unfolding curves in step (d) with the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules; and

(f)   ranking the affinities of said multiplicity of different molecules for said target molecule according to the change in each of said thermal unfolding curves.

67.   The method of claim 66, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

SUBSTITUTE SHEET

AMENDED SHEET

- 116 -

68.   The method of claim 66, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said multiplicity of wells.

69.   The method of claim 66 wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules; and

wherein said step (f) comprises

(f1)   ranking the affinities of said multiplicity of different molecules for said target molecule according to the change in T_m of each of said thermal unfolding curves.

70.   The method of claim 66, wherein said target molecule is a protein.

71.   The method of claim 70, wherein said step (a) comprises contacting said target molecule with said multiplicity of different molecules, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

AMENDED SHEET

72.   The method of claim 71, wherein said fluorescence is fluorescence

emission.

73.   The method of claim 70, wherein said step (c) comprises

(c1)   exciting tryptophan residues in said protein, in each of said multiplicity of

wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

74.   The method of claim 73, wherein said fluorescence is fluorescence

emission.

75.   The method of claim 66, wherein said target molecule is a nucleic acid.

76.   The method of claim 75, wherein said step (c) comprises measuring the

change in hyperchromicity of said nucleic acid.

77.   The method of claim 75, wherein said target molecule is a fluorescently

labeled double-stranded oligonucleotide.

78.   The method of claim 77, wherein one strand of said oligonucleotide

contains a donor fluorophore and the other strand of said oligonucleotide contains an

acceptor fluorophore.

SUBSTITUTE SHEET

AMENDED SHEET

79.   The method of claim 78, wherein said step (a) comprises contacting said oligonucleotide with said multiplicity of different molecules in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said donor fluorophore, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from said acceptor fluorophore in each of said multiplicity of wells.

80.   The method of claim 79, wherein said fluorescence is fluorescence emission.

81.   The method of claim 70 or 79, wherein said step (c2) further comprises measuring the fluorescence from said multiplicity of wells one at a time.

82.   The method of claim 70 or 79, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

83.   The method of claim 70 or 79, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells simultaneously.

84.   The method of claim 66, wherein said multiplicity of different molecules comprises a combinatorial library.

SUBSTITUTE SHEET

- 119 -

85.   The method of claim 84, wherein said combinatorial library is a DirectedDiversity® library.

86.   In a combinatorial method for generating lead compounds which comprises synthesizing a multiplicity of compounds and testing the ability of said compounds to bind to a receptor molecule, the improvement comprising

(a)   contacting said receptor molecule with one compound of said multiplicity of compounds in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said receptor molecule resulting from said heating;

(d)   generating a thermal unfolding curve for said receptor molecule as a function of temperature for each of said wells;

(e) comparing each of said thermal unfolding curves in step (d) with the thermal unfolding curve obtained for said receptor molecule in the absence of any of said compounds in said multiplicity of different compounds; and

(f) ranking the affinities of said multiplicity of different compounds for said receptor molecule according to the change in each of said thermal unfolding curves.

87.   The method of claim 86, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

SUBSTITUTE SHEET

- 120 -

88. The method of claim 86, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1) comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said compounds in said multiplicity of different compounds; and

wherein said step (f) comprises

(f1) ranking the efficacies of said multiplicity of different compounds for said receptor molecule according to the change in T_m of each of said thermal unfolding curves.

89. The method of claim 86, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said multiplicity of wells.

90. The method of claim 86, wherein said target molecule is a protein.

91. The method of claim 90, wherein said step (a) comprises contacting said target molecule with said multiplicity of different molecules, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells, and wherein said step (c) comprises

(c1) exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

(c2) measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

AMENDED SHEET

- 121 -

92.   The method of claim 91, wherein said fluorescence is fluorescence

emission.

93.   The method of claim 86, wherein said step (c) comprises

(c1)   exciting tryptophan residues in said protein, in each of said multiplicity of

wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

94.   The method of claim 93, wherein said fluorescence is fluorescence

emission.

95.   The method of claim 86 wherein said target molecule is a nucleic acid.

96.   The method of claim 95, wherein said step (c) comprises measuring the

change in hyperchromicity of said nucleic acid.

97.   The method of claim 95, wherein said target molecule is a fluorescently

labeled double-stranded oligonucleotide.

98.   The method of claim 97, wherein one strand of said oligonucleotide

contains a donor fluorophore and the other strand of said oligonucleotide contains an

acceptor fluorophore.

SUBSTITUTE SHEET

AMENDED SHEET

- 122 -

99.   The method of claim 98, wherein said step (a) comprises contacting said oligonucleotide with said multiplicity of different molecule in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said donor fluorophore, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from said acceptor fluorophore in each of said multiplicity of wells.

100.   The method of claim 99, wherein said fluorescence is fluorescence emission.

101.   The method of claim 93 or 98, wherein said step (c2) further comprises measuring the fluorescence from said multiplicity of wells one at a time.

102.   The method of claim 93 or 98, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

103.   The method of claim 93 or 98, wherein said step (c2) further comprises measuring the fluorescence from a each of said multiplicity of wells simultaneously.

104.   The method of claim 86, which further comprises selecting one or more compounds from said multiplicity of wells by their maximal binding affinity for said

SUBSTITUTE SHEET

- 123 -

receptor molecule and generating a second library of compounds having high affinity for said receptor molecule.

105.   The method of claim 86, wherein said multiplicity of compounds comprises a combinatorial library.

106.   The method of claim 105, wherein said combinatorial library is a DirectedDiversity® library.

107.   A product of manufacture, which comprises a carrier having a multiplicity of containers therein, each of said containers containing

(a)   a target molecule which is capable of denaturing due to heating; and

(b)   one molecule selected from a multiplicity of different molecules present in a combinatorial library, each of said different molecules present in a different one of said multiplicity of containers in said carrier.

108.   The product of manufacture of claim 107, wherein said target molecule is a protein.

109.   The product of manufacture of claim 108, which further comprises a fluorescence probe molecule in each of said multiplicity of containers.

SUBSTITUTE SHEET

AMENDED SHEET

- 124 -

110.   The product of manufacture of claim 107, wherein said target molecule is a nucleic acid.

111.   The product of manufacture of claim 110 wherein said nucleic acid is a fluorescently labeled double-stranded oligonucleotide.

112.   The product of manufacture of claim 111, wherein one strand of said oligonucleotide contains a donor fluorophore and the other strand of said oligonucleotide contains an acceptor fluorophore.

113.   The product of manufacture of claim 107, wherein said multiplicity of containers comprises a multiplicity of wells in a microplate.

114.   The product of manufacture of claim 107, wherein said combinatorial library is a DirectedDiversity® library.

115.   A method for ranking the affinity of each of at least two of a multiplicity of different molecules for a target molecule which is capable of unfolding due to a thermal change, which comprises

(a)   contacting said target molecule with a collection of at least two molecules of said multiplicity of different molecules in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

SUBSTITUTE SHEET

AMENDED SHEET

- 125 -

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating;

(d)   generating a set of thermal unfolding curves for said target molecule as a function of temperature for each of said wells;

(e)   comparing each of said thermal unfolding curves in step (d) with the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules;

(f)   ranking the affinities of said collections of different molecules for said target molecule according to the change in each of said thermal unfolding curves;

(g)   selecting the collection of different molecules which contains a molecule with affinity for said target molecule;

(h)   dividing said collection into smaller collections of molecules in each of a multiplicity of wells; and

(i) repeating steps (b) through (h) until a single molecule from said multiplicity of different molecules is identified that causes a shift in the thermal unfolding curve for said target molecule, relative to the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules .

116.   The method of claim 115, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

117.   The method of claim 114, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

SUBSTITUTE SHEET

AMENDED SHEET

- 126 -

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said molecules in said multiplicity of different molecules; and

wherein said step (f) comprises

(f1)   ranking the affinities of said collections of different molecules according to the change in T_m of each of said thermal unfolding curves.

118.   The method of claim 115, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said multiplicity of wells.

119.   The method of claim 115, wherein said target molecule is a protein.

120.   The method of claim 115, wherein said step (a) comprises contacting said target molecule with said multiplicity of different molecules, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

AMENDED SHEET

- 127 -

121.   The method of claim 120, wherein said fluorescence is fluorescence emission.

122.   The method of claim 120, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

123.   The method of claim 115, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells simultaneously.

124.   The method of claim 119, wherein said step (c) comprises

(c1)   exciting tryptophan residues in said protein, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

125.   The method of claim 121, wherein said fluorescence is fluorescence emission.

126.   The method of claim 115, wherein said multiplicity of different molecules comprises a combinatorial library.

127.   The method of claim 126, wherein said combinatorial library is a DirectedDiversity® directed diversity chemical library.

SUBSTITUTE SHEET

AMENDED SHEET

- 128 -

128. The method of claim 115, wherein said step (c) comprises simultaneously measuring said physical change in all of said multiplicity of wells.

129. A method for ranking the affinity of each of a multiplicity of different molecules for a target molecule which is capable of unfolding due to a thermal change, which comprises

(a) determining the magnitude of a physical change associated with the thermal unfolding of said target molecule resulting from heating by generating a thermal unfolding curve for said target molecule as a function of temperature over a range of one or more discrete temperatures, measuring a physical change associated with the thermal unfolding of said target molecule resulting from said heating, and noting the magnitude of said physical change at each of said discrete temperatures within said temperature range;

(b) contacting said target molecule with one molecule of said multiplicity of different molecules in each of a multiplicity of wells in a microplate;

(c) simultaneously heating said multiplicity of wells from step (b) to one or more discrete temperatures within said temperature range;

(d) measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating and determining the magnitude of said physical change therefrom at said one or more discrete temperatures;

(e) comparing the magnitude of said physical changes in step (d) at said one or more discrete temperatures with the magnitude of said physical change obtained for said target molecule at said same one or more discrete temperatures in the absence of any of said molecules in said multiplicity of different molecules; and

SUBSTITUTE SHEET

AMENDED SHEET

- 129 -

(f)   ranking the affinities of said multiplicity of different molecules for said

target molecule according to the change in the magnitude of the physical change of each

of said wells.

130.   The method of claim 129, wherein said unfolding is denaturing, and

wherein said thermal unfolding curve is a thermal denaturation curve.

131.   The method of claim 129, wherein said discrete temperature is the midpoint

temperature (T_m) for said thermal unfolding curve for said target molecule in the absence

of any of said molecules in said multiplicity of different molecules.

132.   The method of claim 129, wherein said step (d) comprises measuring the

absorbance of light by said contents of each of said multiplicity of wells.

133.   The method of claim 129, wherein said target molecule is a protein.

134.   The method of claim 129, wherein said step (b) comprises contacting said

target molecule with said multiplicity of different molecules, in the presence of a

fluorescence probe molecule present in each of said multiplicity of wells, and wherein said

step (d) comprises

(d1)   exciting said fluorescence probe molecule, in each of said multiplicity of

wells, with light; and

(d2)   measuring the fluorescence from each of said multiplicity of wells.

SUBSTITUTE SHEET

AMENDED SHEET

- 130 -

135. The method of claim 132, wherein said fluorescence is fluorescence emission.

136. The method of claim 133, wherein said step (d) comprises

(d1) exciting tryptophan residues in said protein, in each of said multiplicity of wells, with light; and

(d2) measuring the fluorescence from each of said multiplicity of wells.

137. The method of claim 136, wherein said fluorescence is fluorescence emission.

138. The method of claim 129, wherein said target molecule is a nucleic acid.

139. The method of claim 129, wherein said step (c) comprises measuring the change in hyperchromicity of said nucleic acid.

140. The method of claim 129, wherein said target molecule is a fluorescently labeled double-stranded oligonucleotide.

141. The method of claim 140, wherein one strand of said oligonucleotide contains a donor fluorophore and the other strand of said oligonucleotide contains an acceptor fluorophore.

SUBSTITUTE SHEET

- 131 -

142. The method of claim 134 or 136, wherein said step (d2) further comprises measuring the fluorescence from said multiplicity of wells one at a time.

143. The method of claim 134 or 136, wherein said step (d2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

144. The method of claim 134 or 136, wherein said step (d2) further comprises measuring the fluorescence from each of said multiplicity of wells simultaneously.

145. The method of claim 129, wherein said step (c) comprises

(d1) exciting tryptophan residues in said protein, in each of said multiplicity of wells, with light; and

(d2) measuring the fluorescence from each of said multiplicity of wells.

146. The method of claim 145, wherein said fluorescence is fluorescence emission.

147. The method of claim 129, wherein said multiplicity of different molecules comprises a combinatorial library.

148. The method of claim 147, wherein said combinatorial library is a DirectedDiversity® directed diversity chemical library.

SUBSTITUTE SHEET

AMENDED SHEET

- 132 -

149. A multi-variable optimization method for ranking the efficacy of a combination of a multiplicity of different molecules or different biochemical conditions for optimizing the shelf life of a protein which is capable of unfolding due to a thermal change, which comprises

(a) contacting said protein with one or more of said multiplicity of different molecules or different biochemical conditions in each of a multiplicity of wells in a microplate;

(b) simultaneously heating said multiplicity of wells from step (a);

(c) measuring in each of said wells a physical change associated with the thermal unfolding of said protein molecule resulting from said heating;

(d) generating a thermal unfolding curve for said protein as a function of temperature for each of said wells;

(e) comparing each of said unfolding curves in step (d) to (i) each of said other thermal unfolding curves and to (ii) the thermal unfolding curve obtained for said protein in the absence of any of said different molecules or under a reference set of biochemical conditions; and

(f) ranking the efficacies of said multiplicity of different molecules or said different biochemical conditions according to the change in each of said thermal unfolding curves.

150. The method of claim 149, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

SUBSTITUTE SHEET

AMENDED SHEET

- 133 -

151.   The method of claim 149, further comprising

(g)   generating combinations of biochemical conditions that increase the magnitude of said physical change, relative to the magnitude of said physical change of each of said thermal unfolding curves in said step (f); and

(h)   repeating said steps (a) through (g) until a combination of biochemical conditions is determined that promotes maximal shelf-life.

152.   The method of claim 149, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding curve obtained for said target molecule in the absence of any of said different molecules or obtained under a reference set of biochemical conditions; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said multiplicity of different molecules or said different biochemical conditions according to the change in T_m of each of said thermal unfolding curves.

153.   A multi-variable method for ranking the efficacy of one or more combinations of two or more of a multiplicity of different biochemical conditions for stabilizing a target molecule which is capable of unfolding due to a thermal change, which comprises

SUBSTITUTE SHEET

- 134 -

(a)   contacting said target molecule with a combination of two or more of said multiplicity of different biochemical conditions in each of a multiplicity of wells in a microplate;

(b)   simultaneously heating said multiplicity of wells from step (a);

(c)   measuring in each of said wells a physical change associated with the thermal unfolding of said target molecule resulting from said heating;

(d)   generating a thermal unfolding curve for said target molecule as a function of temperature for each of said wells;

(e)   comparing each of said unfolding curves in step (d) to (i) each of said other unfolding curves and to (ii) the unfolding curve obtained for said target molecule under a reference set of biochemical conditions; and

(f)   ranking the efficacies of said combinations of different biochemical conditions according to the change in each of said thermal unfolding curves.

154.   The method of claim 153, wherein said unfolding is denaturing, and wherein said thermal unfolding curve is a thermal denaturation curve.

155.   The method of claim 153, wherein said step (d) further comprises determining a midpoint temperature (T_m) from the thermal unfolding curve;

wherein said step (e) comprises

(e1)   comparing the T_m of each of said unfolding curves in step (d) to (i) the T_m of each of said other thermal unfolding curves and to (ii) the T_m of the thermal unfolding

SUBSTITUTE SHEET

- 135 -

curve obtained for said target molecule under a reference set of biochemical conditions; and

wherein said step (f) comprises

(f1)   ranking the efficacies of said combinations of different biochemical conditions according to the change in T_m of each of said thermal unfolding curves.

156.   The method of claim 153, wherein said target molecule is a protein.

157.   The method of claim 153, wherein said step (c) comprises measuring the absorbance of light by said contents of each of said wells.

158.   The method of claim 156, wherein said step (a) comprises contacting said protein with said combinations of different biochemical conditions, in the presence of a fluorescence probe molecule present in each of said multiplicity of wells and wherein said step (c) comprises

(c1)   exciting said fluorescence probe molecule, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

159.   The method of claim 158, wherein said fluorescence is fluorescence emission.

160.   The method of claim 158, wherein said target molecule is a nucleic acid.

SUBSTITUTE SHEET

- 136 -

161.   The method of claim 158, wherein said step (c) comprises measuring the change in hyperchromicity of said nucleic acid.

162.   The method of claim 153, wherein said target molecule is a fluorescently labeled double-stranded oligonucleotide.

163.   The method of claim 162, wherein one strand of said oligonucleotide contains a donor fluorophore and the other strand of said oligonucleotide contains an acceptor fluorophore.

164.   The method of claim 153, wherein said step (a) comprises contacting said oligonucleotide with said combination of different biochemical conditions, in each of said multiplicity of wells, and wherein said step (c) comprises

(c1)   exciting said donor fluorophore, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from said acceptor fluorophore in each of said multiplicity of wells.

165.   The method of claim 164, wherein said fluorescence is fluorescence emission.

166.   The method of claim 158, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells one well at a time.

SUBSTITUTE SHEET

AMENDED SHEET

- 137 -

167.   The method of claim 158, wherein said step (c2) further comprises measuring the fluorescence from a subset of said multiplicity of wells simultaneously.

168.   The method of claim 158, wherein said step (c2) further comprises measuring the fluorescence from each of said multiplicity of wells simultaneously.

169.   The method of claim 156, wherein said step (c) comprises (c1) exciting tryptophan residues in said protein, in each of said multiplicity of wells, with light; and

(c2)   measuring the fluorescence from each of said multiplicity of wells.

170.   An apparatus for sensing fluorescence emissions from a plurality of heated samples, comprising

a first heat conducting block configured to receive a first plurality of samples;

a temperature controller coupled to said first heat conducting block;

a light source disposed adjacent to said first heat conducting block;

a fluorescence emission sensor disposed adjacent to said first heat conducting block; and

a computer program product comprising a computer useable medium having control logic embodied in said medium, said control logic comprising

thermal unfolding data recording means for causing a computer system to record thermal unfolding data received from said fluorescence emission sensor,

SUBSTITUTE SHEET

- 138 -

thermal curve generation means for causing the computer system to generate thermal curves from the thermal unfolding data, and

thermal curve comparison means for causing the computer system to compare thermal curves.

171. The apparatus according to claim 170, wherein said temperature controller comprises:

a temperature profile controller.

172. The apparatus according to claim 170, wherein said temperature controller comprises:

a temperature gradient controller.

173. The apparatus according to claim 170, wherein said temperature controller comprises:

a temperature profile controller; and

a temperature gradient controller.

174. The apparatus according to claim 170, further comprising:

a second heat conducting block configured to receive a second plurality of samples.

SUBSTITUTE SHEET

AMENDED SHEET

- 139 -

175.   The apparatus according to claim 174, wherein said temperature controller comprises:

means for independently controlling respective temperatures of said first and second heat conducting blocks.

176.   The apparatus according to claim 170, wherein said fluorescence emission sensor is configured to receive fluorescence emissions from one sample at a time.

177.   The apparatus according to claim 170, wherein said fluorescence emission sensor is configured to receive fluorescence emissions from two or more samples at a time.

178.   The apparatus according to claim 170, wherein said fluorescence emission sensor is configured to receive fluorescence emissions from all of the first plurality of samples at a time.

179.   The apparatus according to claim 170, further comprising:

a first heat conducting adaptor disposed within said first heat conducting block, said first heat conducting adaptor configured to receive a first heat conducting container for holding the first plurality of samples.

SUBSTITUTE SHEET

AMENDED SHEET

- 140 -

180.   The apparatus according to claim 170, wherein the first heat conducting

container comprises:

a microtiter plate.

181.   The apparatus according to claim 170, further comprising a computer

program product comprising a computer useable medium having control logic embodied

in said medium, said control logic comprising:

temperature controlling means for causing the computer system to control

said temperature controller;

light source controlling means for causing the computer system to energize

said light source; and

fluorescence emission receiving means for causing the computer system

to receive fluorescence emissions from said fluorescence emission sensor.

182.   The apparatus according to claim 170, wherein said thermal unfolding data

recording means comprises:

thermal denaturing data recording means for causing the computer system to

record thermal denaturing data of the one or more samples.

183.   The apparatus according to claim 191, wherein said thermal curve

generation means comprises:

thermal denaturing curve generation means for causing the computer system to

generate thermal denaturing curves from the thermal denaturing data.

SUBSTITUTE SHEET

- 141 -

184. The apparatus according to claim 170, wherein said thermal curve comparison means comprises:

thermal denaturing curve comparison means for causing the computer system to compare thermal denaturing curves.

185. The apparatus according to claim 170, wherein said curve comparison means comprises:

midpoint temperature comparison means for causing the computer system to compare thermal unfolding temperature midpoints of two or more of the samples.

186. The apparatus according to claim 185, wherein said midpoint temperature comparison means comprises:

midpoint denaturing temperature comparison means for causing the computer system to compare thermal denaturing temperature midpoints of two or more of the samples.

187. The apparatus according to claim 170, wherein said light source comprises a tungsten-halogen lamp.

188. The apparatus according to claim 170, wherein said light source comprises a xenon- arc lamp.

SUBSTITUTE SHEET

- 142 -

189.   The apparatus according to claim 170, wherein said light source comprises a mercury lamp.

190.   The apparatus according to claim 170, wherein said light source comprises a laser.

191.   The apparatus according to claim 170, wherein said light source comprises a fiber optic cable.

192.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a fluorescence plate reader.

193.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a charge coupled device.

194.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a fiber optic probe.

SUBSTITUTE SHEET

AMENDED SHEET

- 143 -

195.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a photomultiplier tube.

196.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a fluorescence scanner.

197.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a fluorescence imaging camera.

198.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a fluorescence polarization sensor.

199.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a charge coupled device fluorescence imaging camera.

200.   The apparatus according to claim 170, wherein said fluorescence emission sensor comprises:

a diode array.

SUBSTITUTE SHEET

- 144 -

201.	The apparatus according to claim 170, further comprising:

a temperature sensor coupled to said temperature controller.

202.	The apparatus according to claim 217, wherein said temperature sensor

comprises:

an infrared temperature sensor.

203.	The apparatus according to claim 217, wherein said temperature sensor is

disposed adjacent to said fluorescence emission sensor.

204.	An apparatus for sensing fluorescence emissions from a plurality of heated

samples, comprising:

a plurality of heat conducting blocks;

a temperature controller coupled to said plurality of heat conducting blocks;

a light source disposed adjacent to said plurality of heat conducting blocks;

a fluorescence emission sensor disposed adjacent to said plurality of heat

conducting blocks; and

a positioning system coupled between said plurality of heat conducting blocks and

said fluorescence emission sensor.

205.	A method for sensing fluorescence emissions from a plurality of heated

samples, comprising the steps of

SUBSTITUTE SHEET

AMENDED SHEET

(1)   aligning a fluorescence emission sensor with a first heat conducting block having a first plurality of samples disposed thereon;

(2)   heating the first block;

(3)   shining an excitatory light towards first block;

(4)   sensing fluorescence emissions from the first plurality of samples; and

(5)   recording thermal unfolding data from the first plurality of samples.

206.   The method according to claim 205, further comprising the step of:

(6)   aligning the fluorescence emission sensor with a second heat conducting block having a second plurality of samples disposed thereon;

(7)   heating the second block;

(8)   shining an excitatory light towards the second block;

(9)   sensing fluorescence emissions from the second plurality of samples; and

(10)   recording thermal unfolding data from the first plurality of samples.

207.   The apparatus according to claim 170, wherein said temperature controller comprises:

a temperature ramp controller.

208.   The apparatus according to claim 170, further comprising:

a positioning system coupled between said first heat conducting block and said fluorescence emission sensor.

SUBSTITUTE SHEET

- 146 -

209. The apparatus according to claim 208, wherein said positioning system comprises:

a translatable platform configured to receive said first heat conducting block.

210. The apparatus according to claim 209, wherein said positioning system further comprises:

a translatable sensor armature coupled to said fluorescence emission sensor.

211. The apparatus according to claim 209, further comprising:

a second heat conducting block disposed on said translatable platform, said second heat conducting block configured to receive a second plurality of samples.

212. The apparatus according to claim 211, wherein said temperature controller comprises:

first and second temperature controllers that independently control respective temperatures of said first and second heat conducting blocks.

213. The apparatus according to claim 208, wherein said positioning system comprises:

a rotatable platform configured to receive said first heat conducting block.

SUBSTITUTE SHEET

AMENDED SHEET

214.   The apparatus according to claim 213, wherein said positioning system further comprises:

a translatable sensor armature coupled to said fluorescence emission sensor.

215.   The apparatus according to claim 213, further comprising:

a second heat conducting block disposed on said rotatable platform, said second heat conducting block configured to receive a second plurality of samples.

216.   The apparatus according to claim 215, wherein said temperature controller comprises:

first and second temperature controllers that independently control respective temperatures of said first and second heat conducting blocks.

217.   The apparatus according to claim 208, wherein said control logic further comprises:

positioning control means for causing the computer system to control said positioning system.

218.   The method according to claim 205, wherein step (4) comprises the step of:

(a) sensing fluorescence emissions from one of the samples at a time.

SUBSTITUTE SHEET

- 148 -

219.   The method according to claim 205, wherein step (4) comprises the step

of:

(a) sensing fluorescence emissions from multiple samples at a time.

220.   The method according to claim 205, wherein step (4) comprises the step

of:

(a) sensing fluorescence emissions from all of the samples at a time.

SUBSTITUTE SHEET

FIG.1

2/40

FIG.2

3/40

TEMPERATURE (°C)

$$y(T) = y_u + \frac{(y_f - y_u)}{1 + \exp\left(\left[\frac{\Delta H_u}{R}\right]\left[\frac{1}{T} - \frac{T}{T_m}\right] + \left[\frac{\Delta C_{pu}}{R}\right]\left[\left(\frac{T_m}{T} - 1\right) + \ln\left(\frac{T}{T_m}\right)\right]\right)}$$

TEMPERATURE (°K)

FIG.3

FIG.4

5/40

FIG.5

FIG.6

FIG.7

TEMPERATURE ('C)
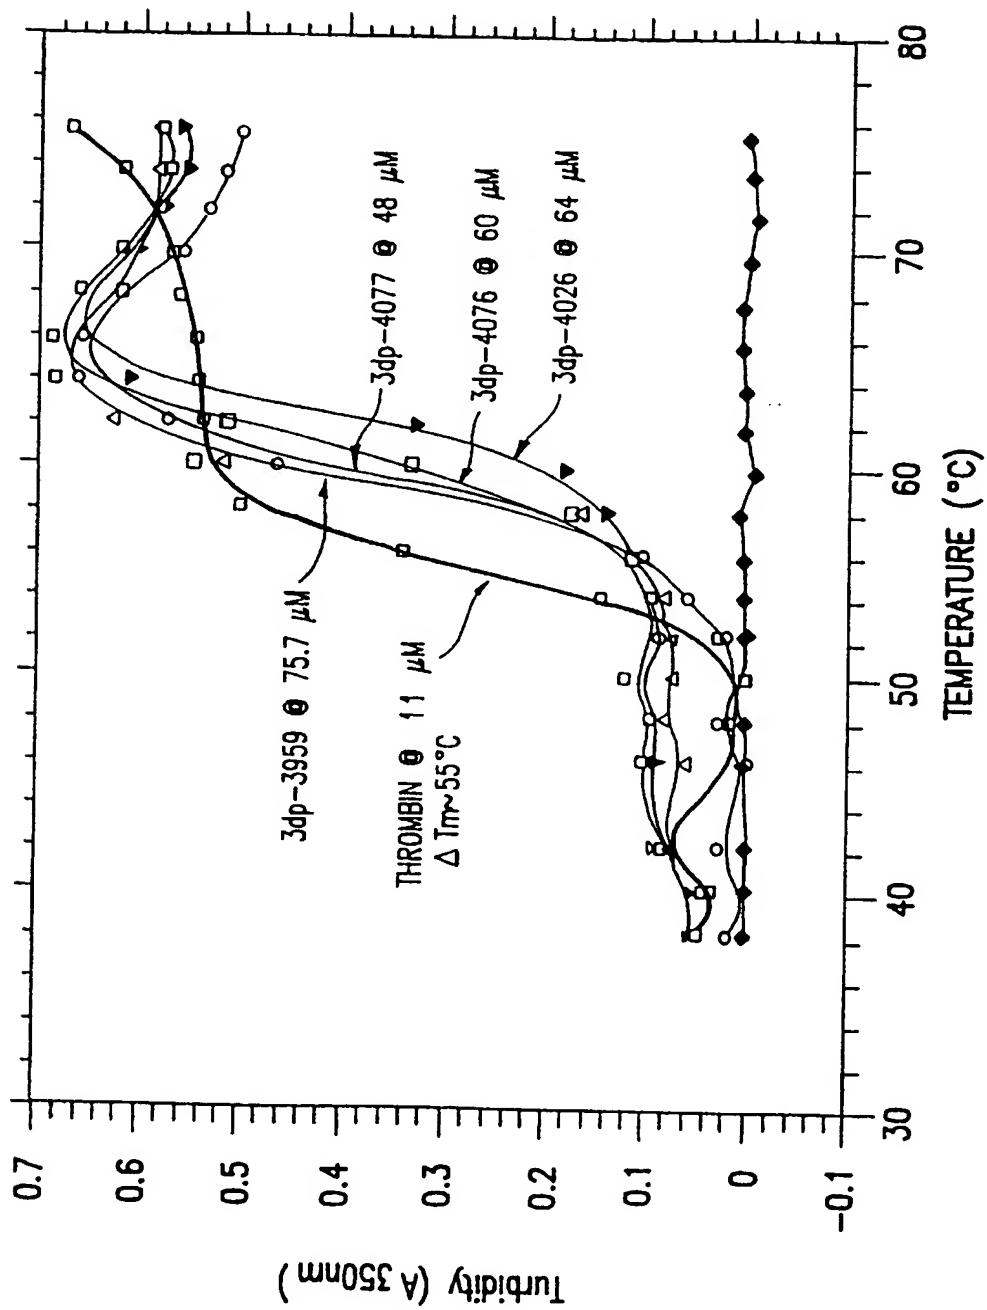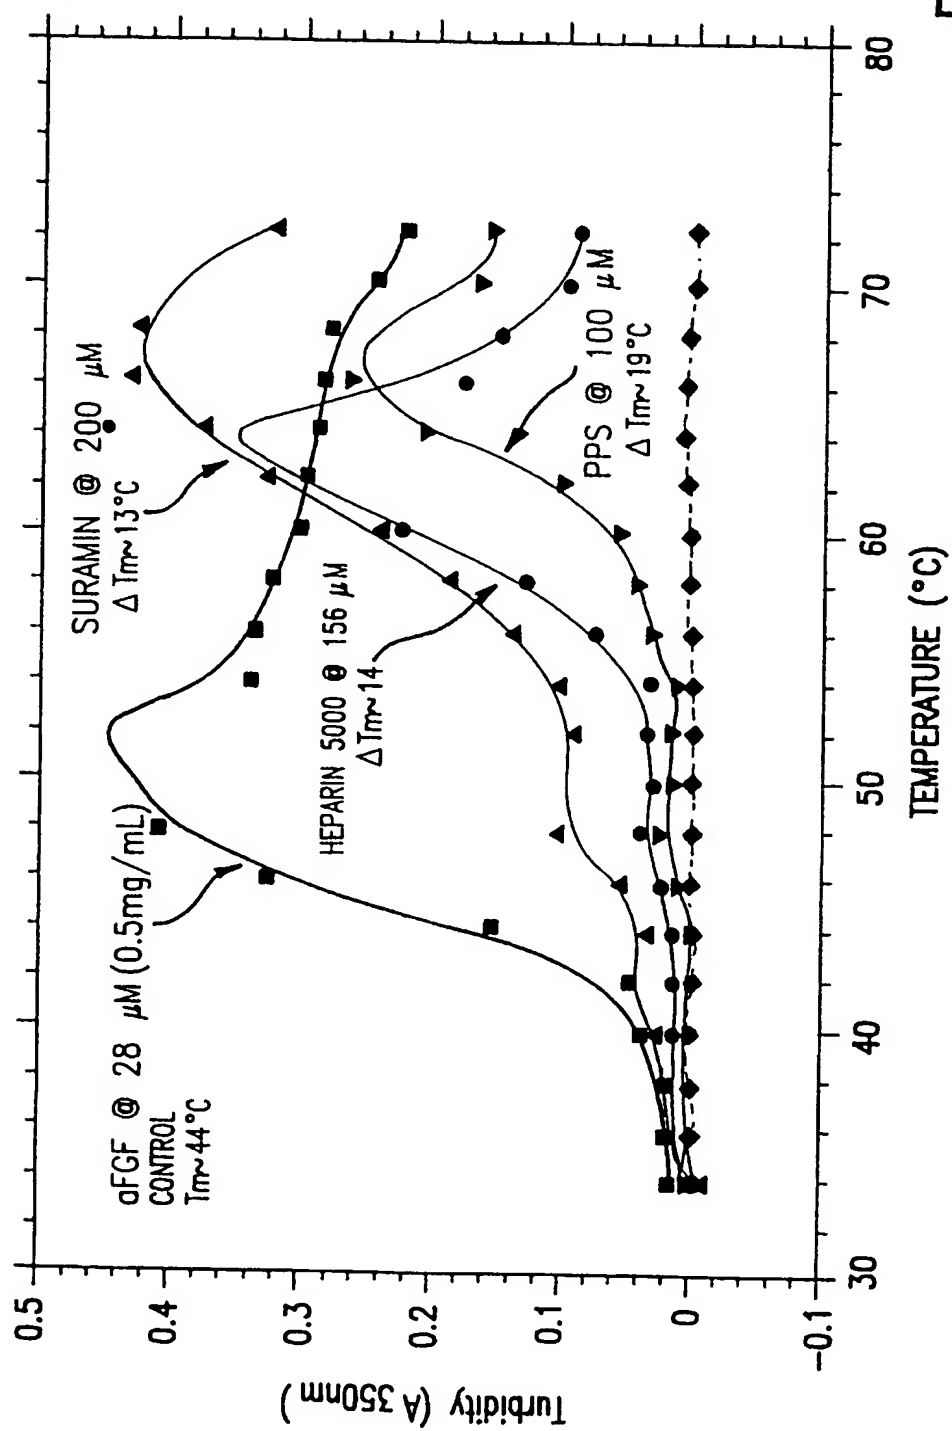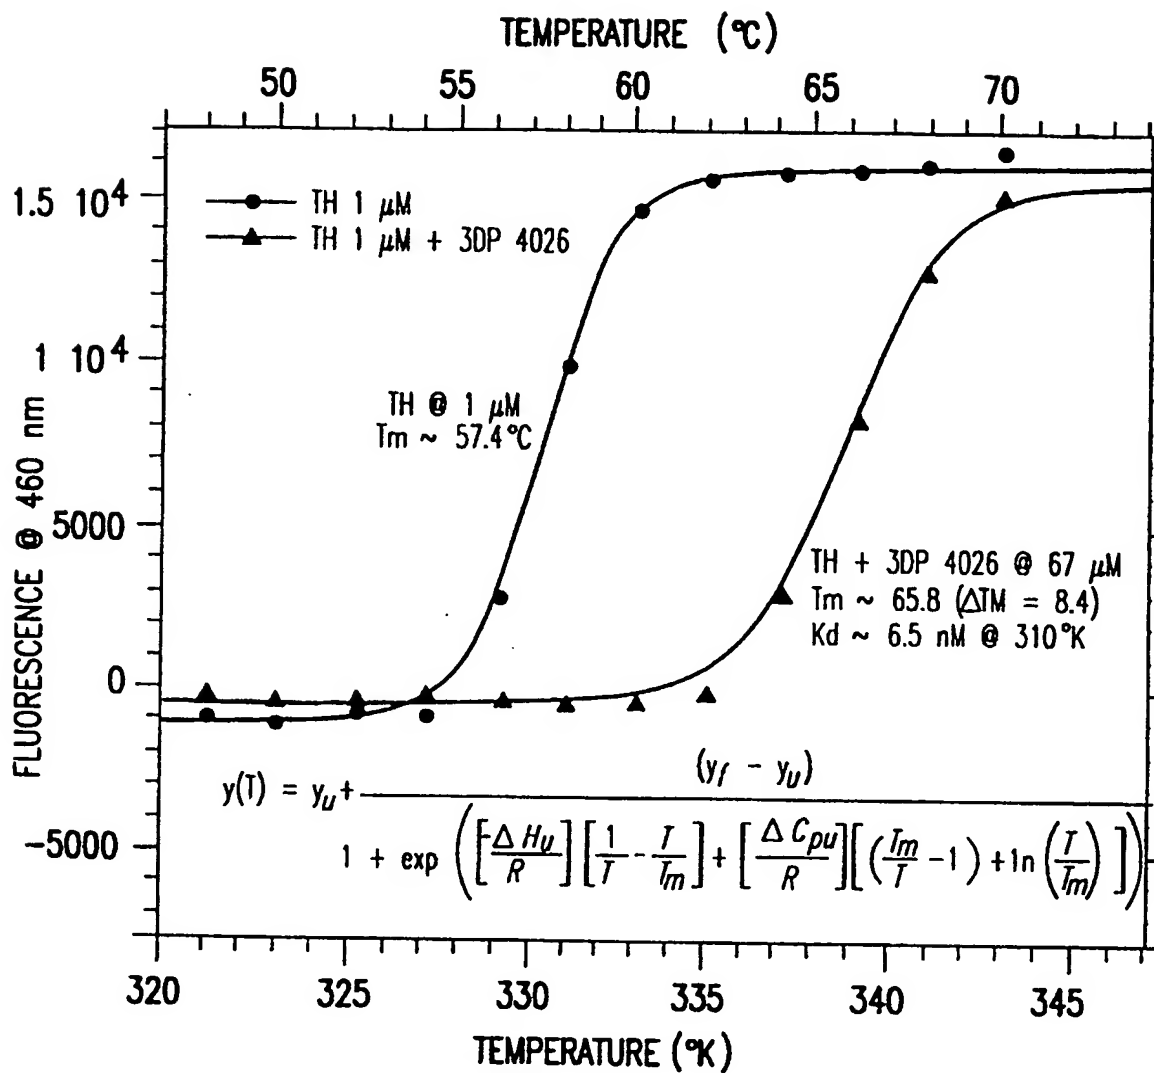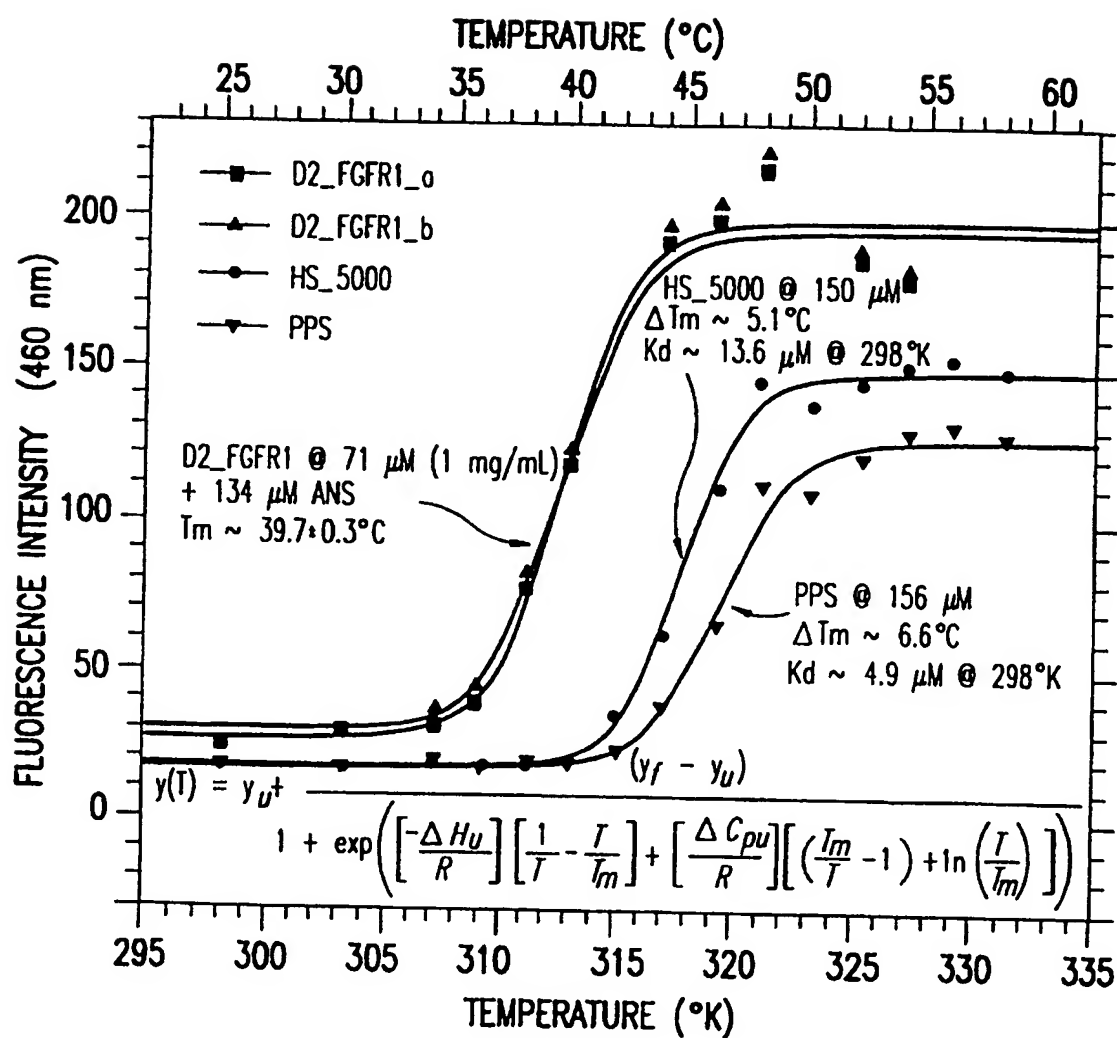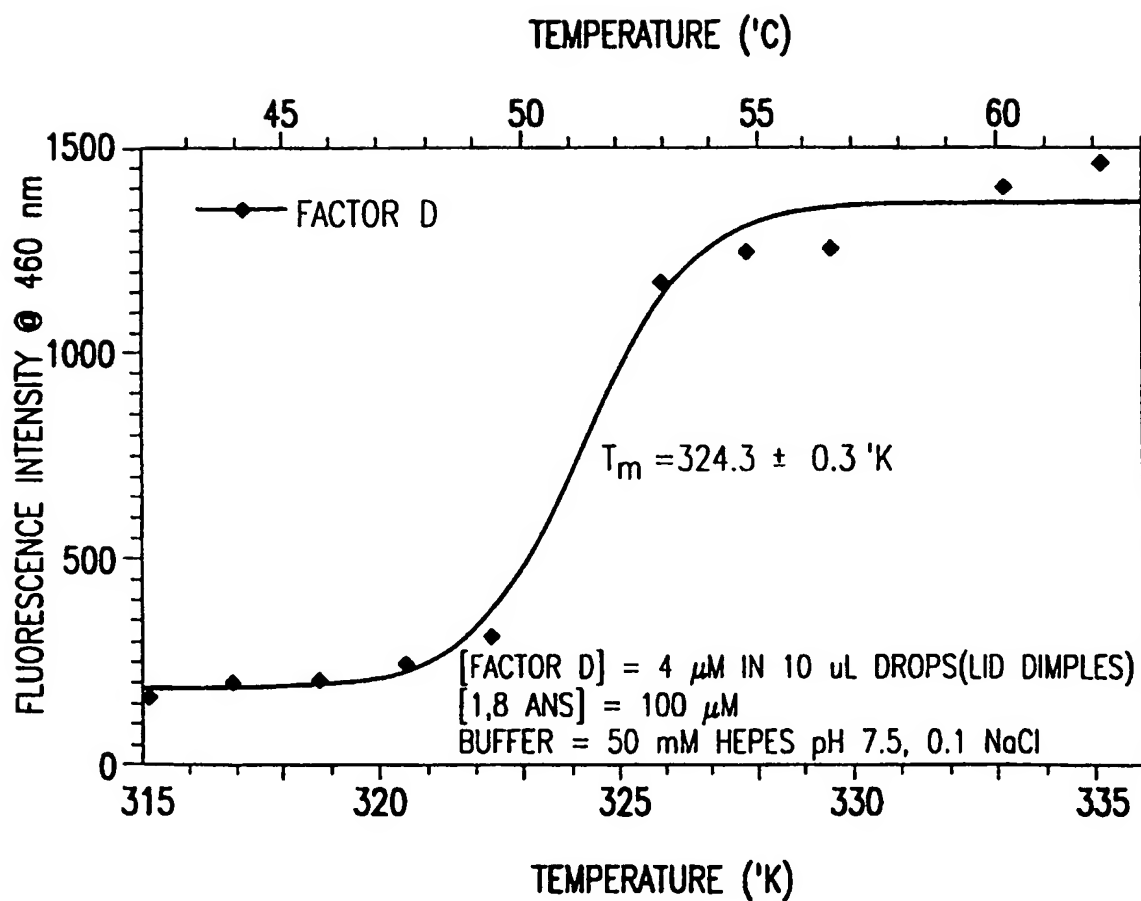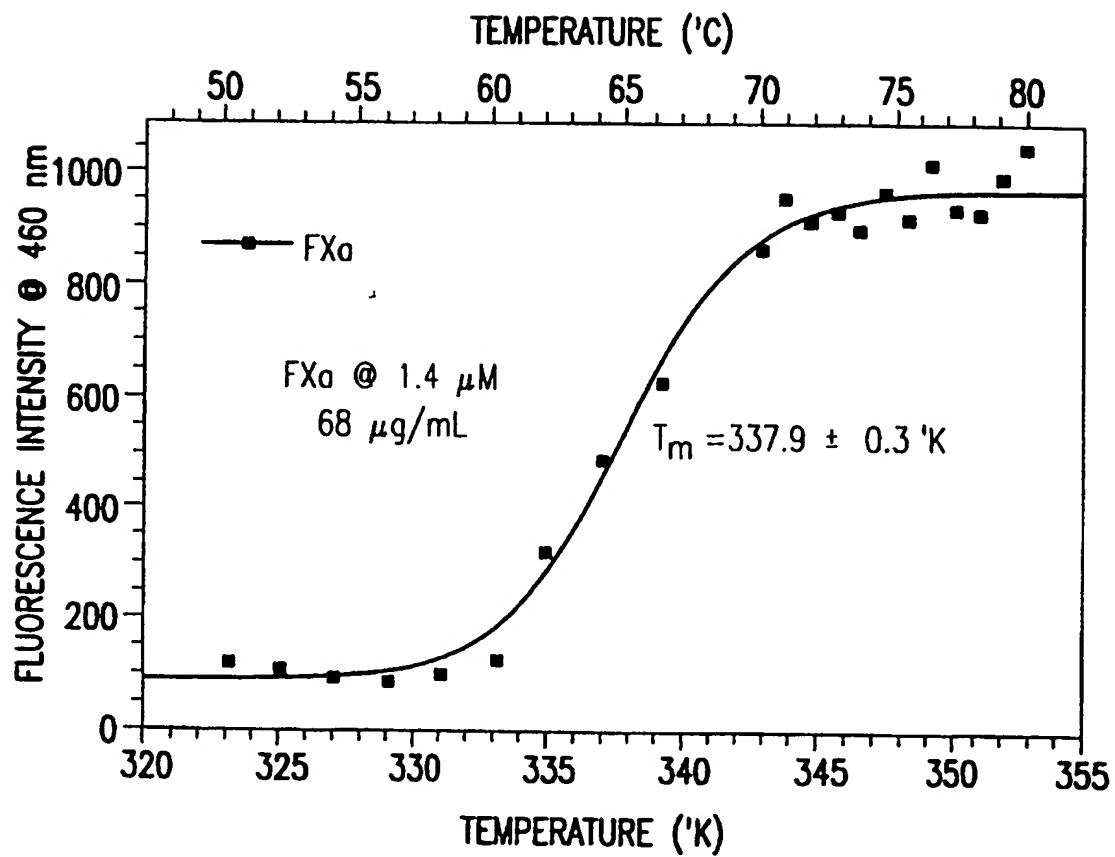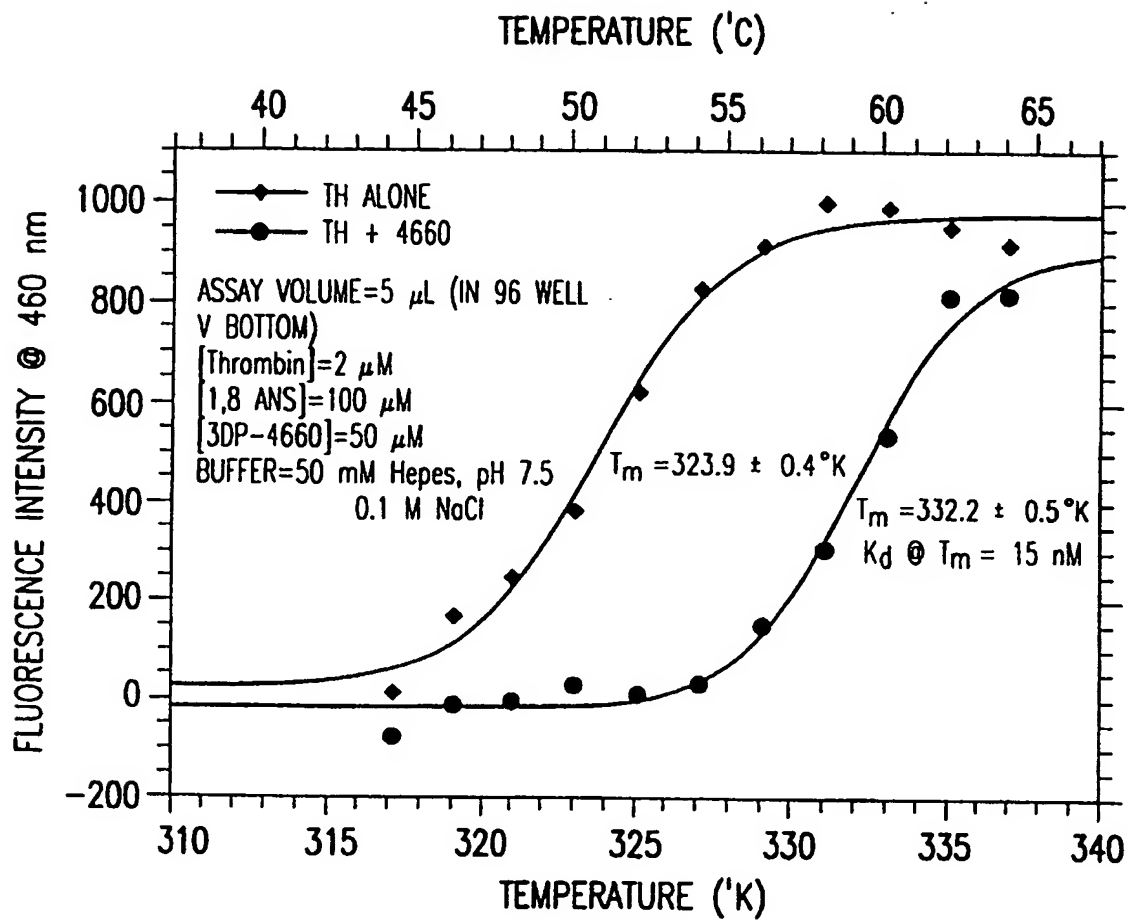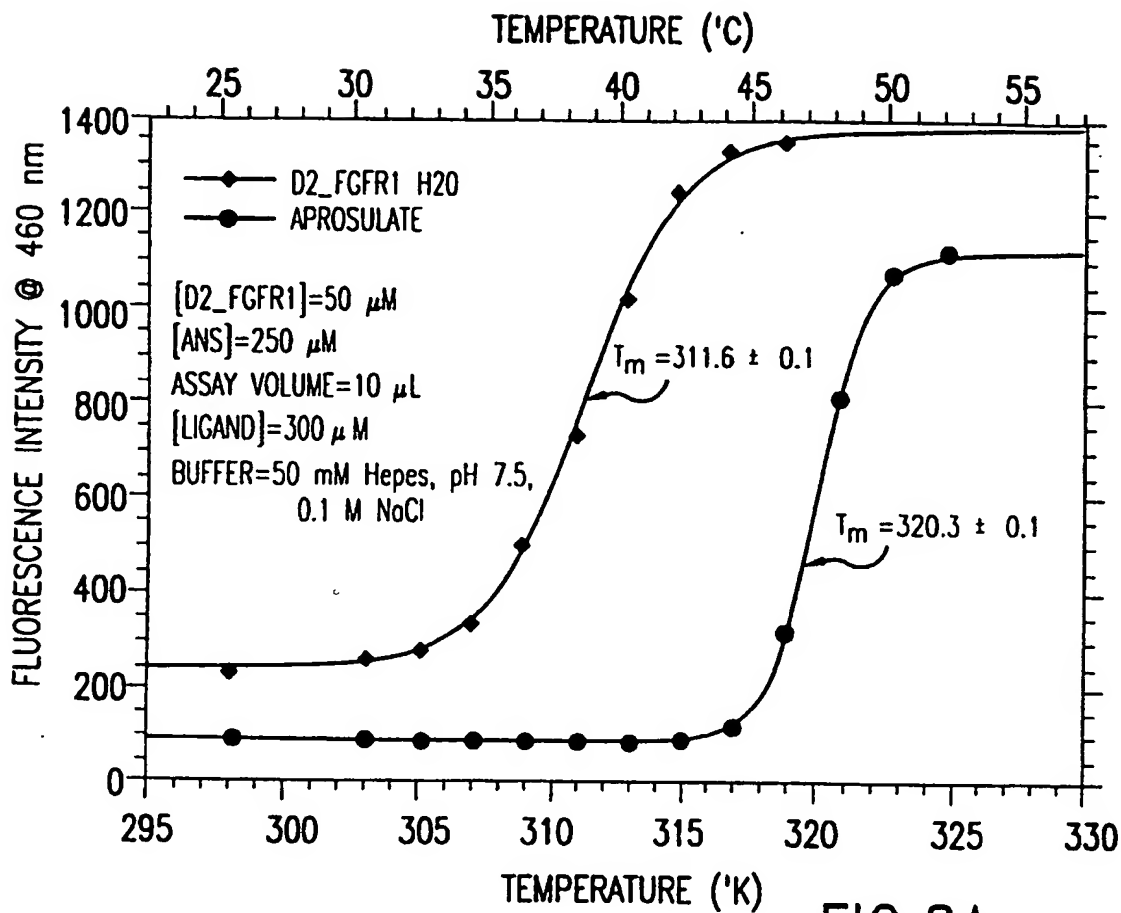
FIG.8A
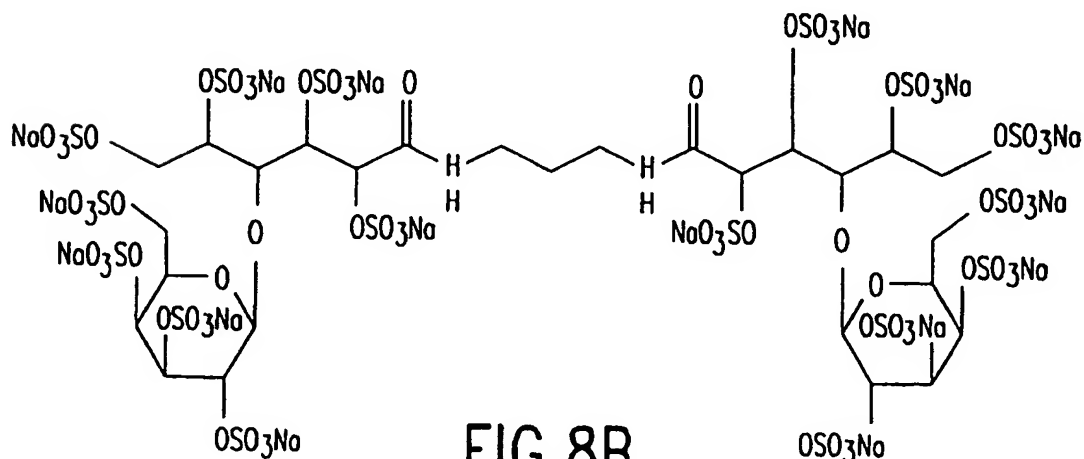
FIG.8B

9/40
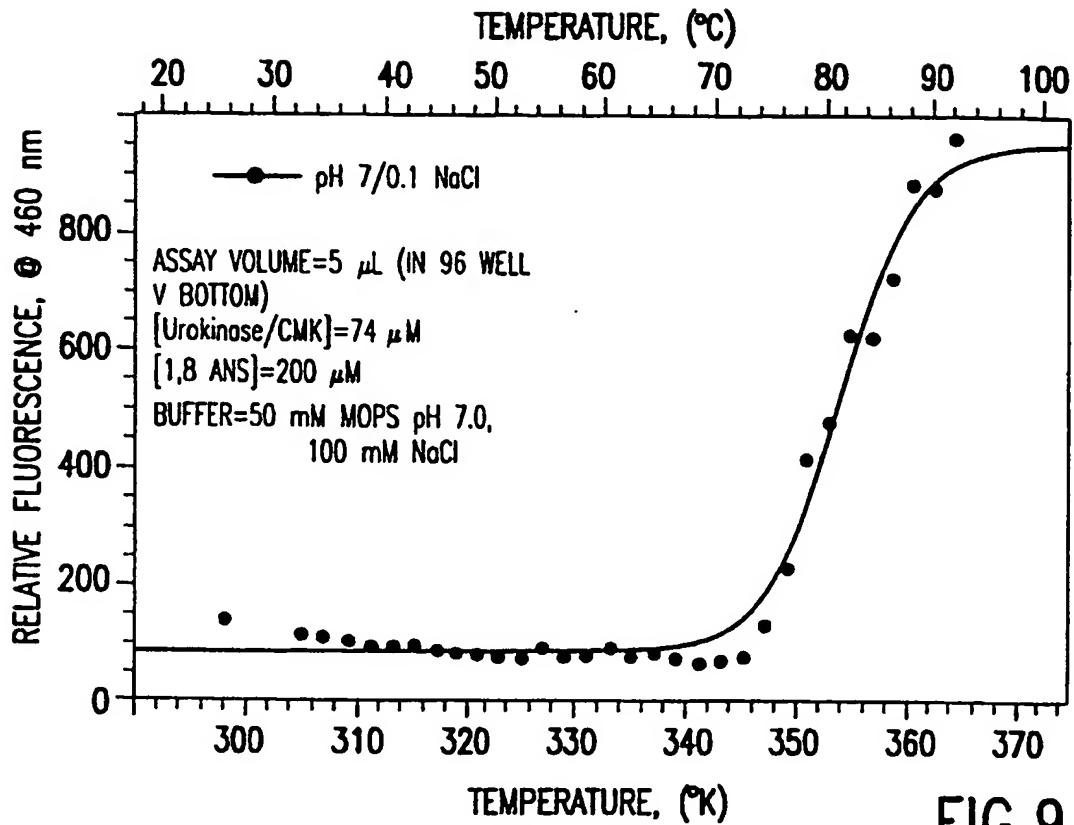
FIG.9
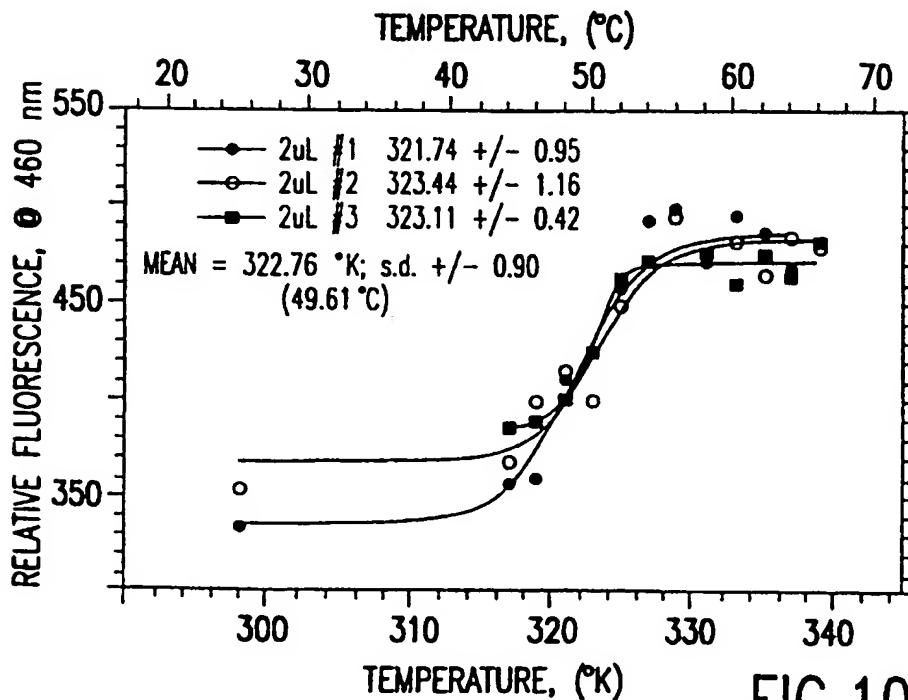
FIG.10

10/40
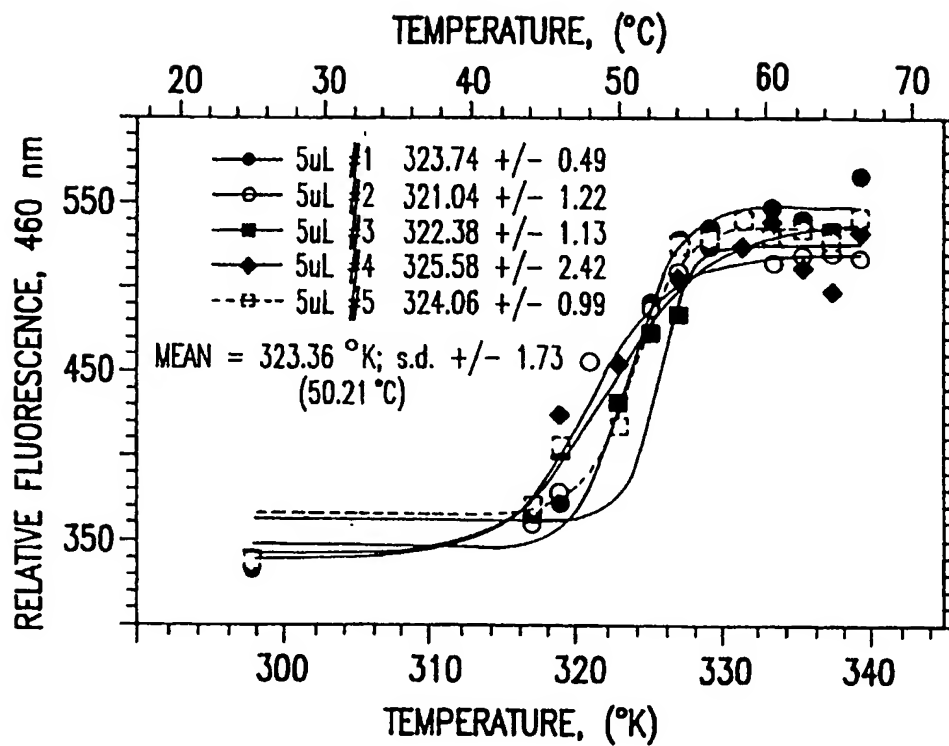
FIG.11

11/40
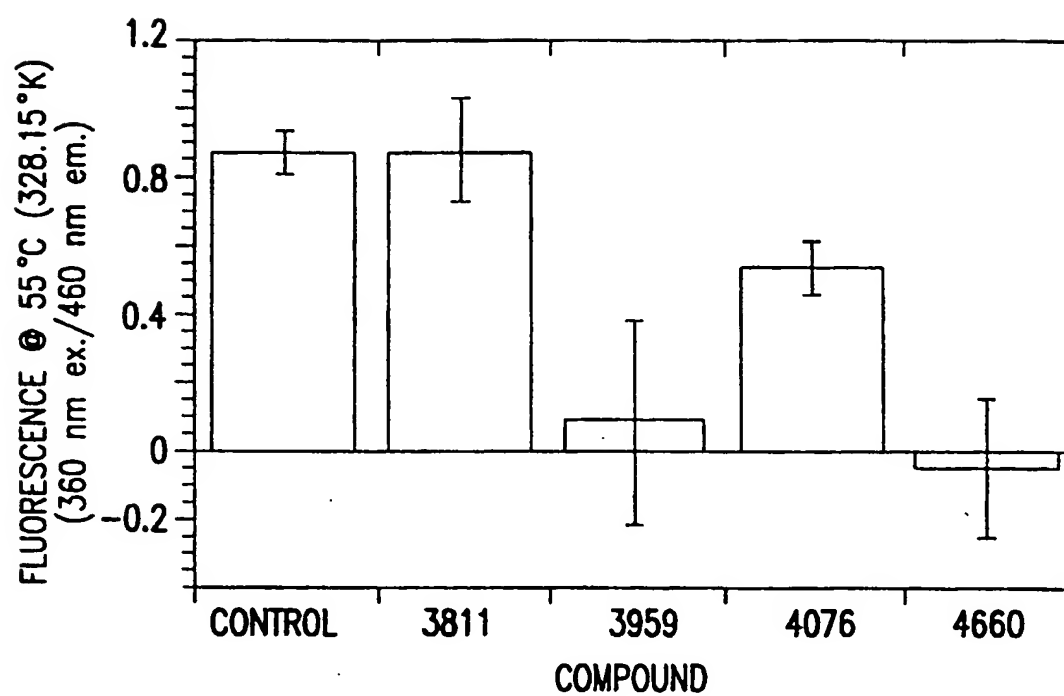
FIG.12

12/40
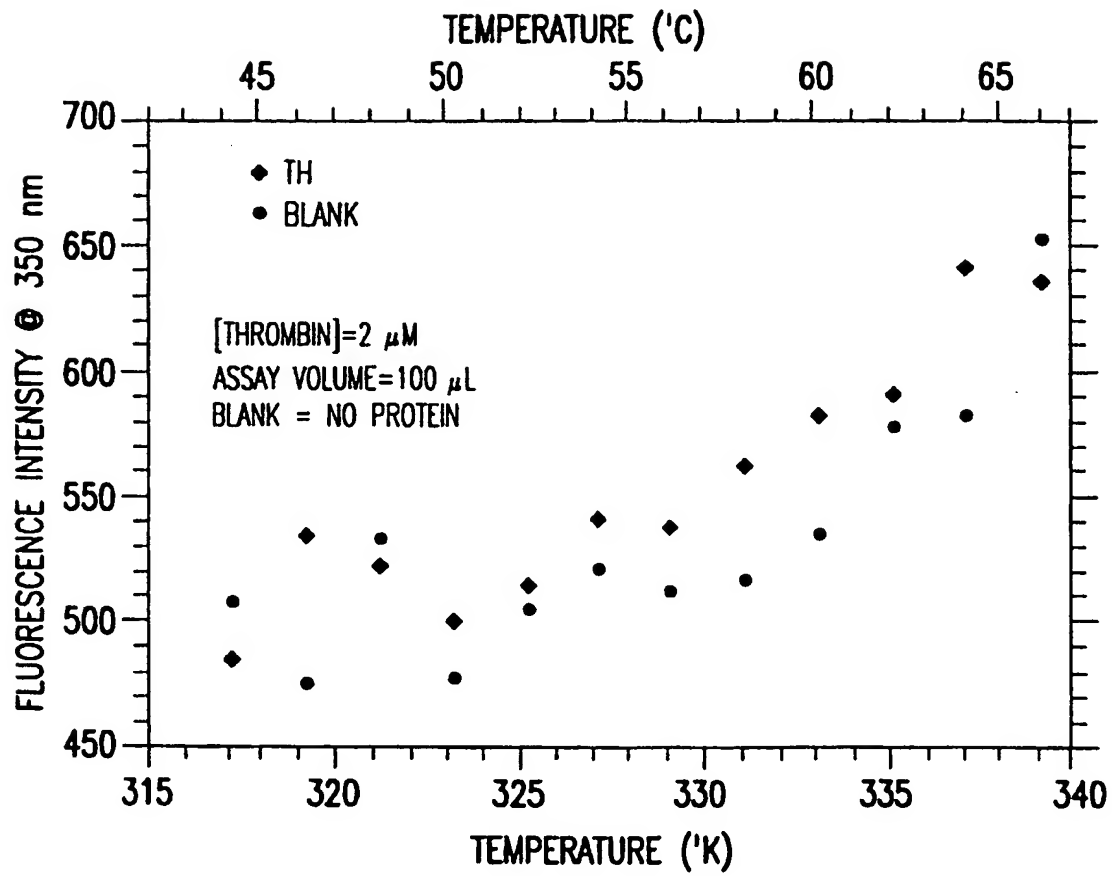
FIG.13

13/40

FIG.14

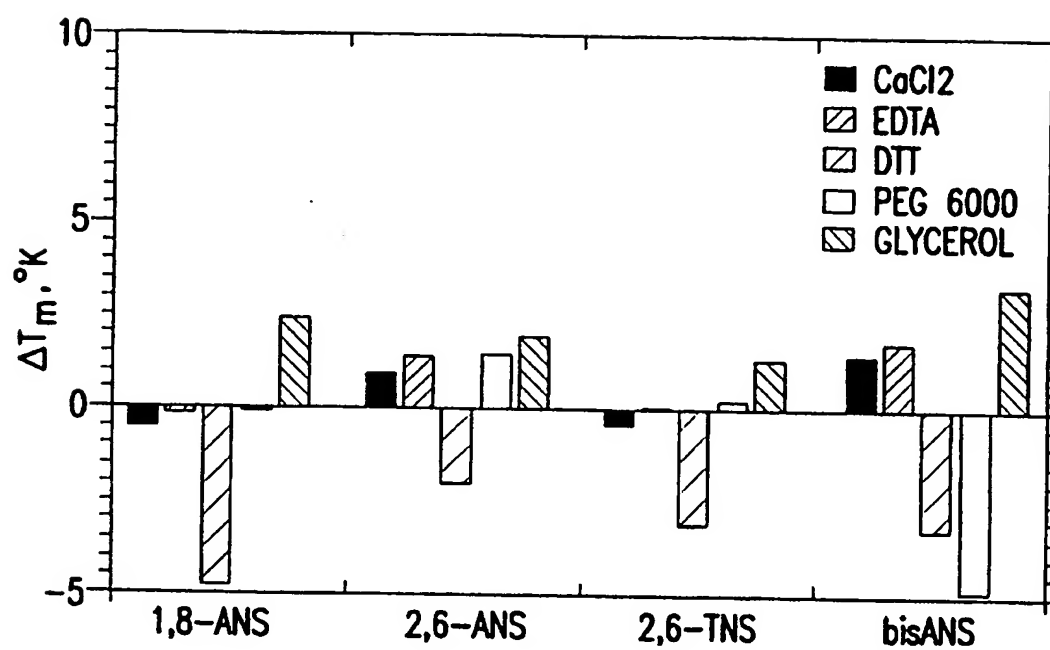14/40

FIG.15

FIG.16

16/40

FIG.17B
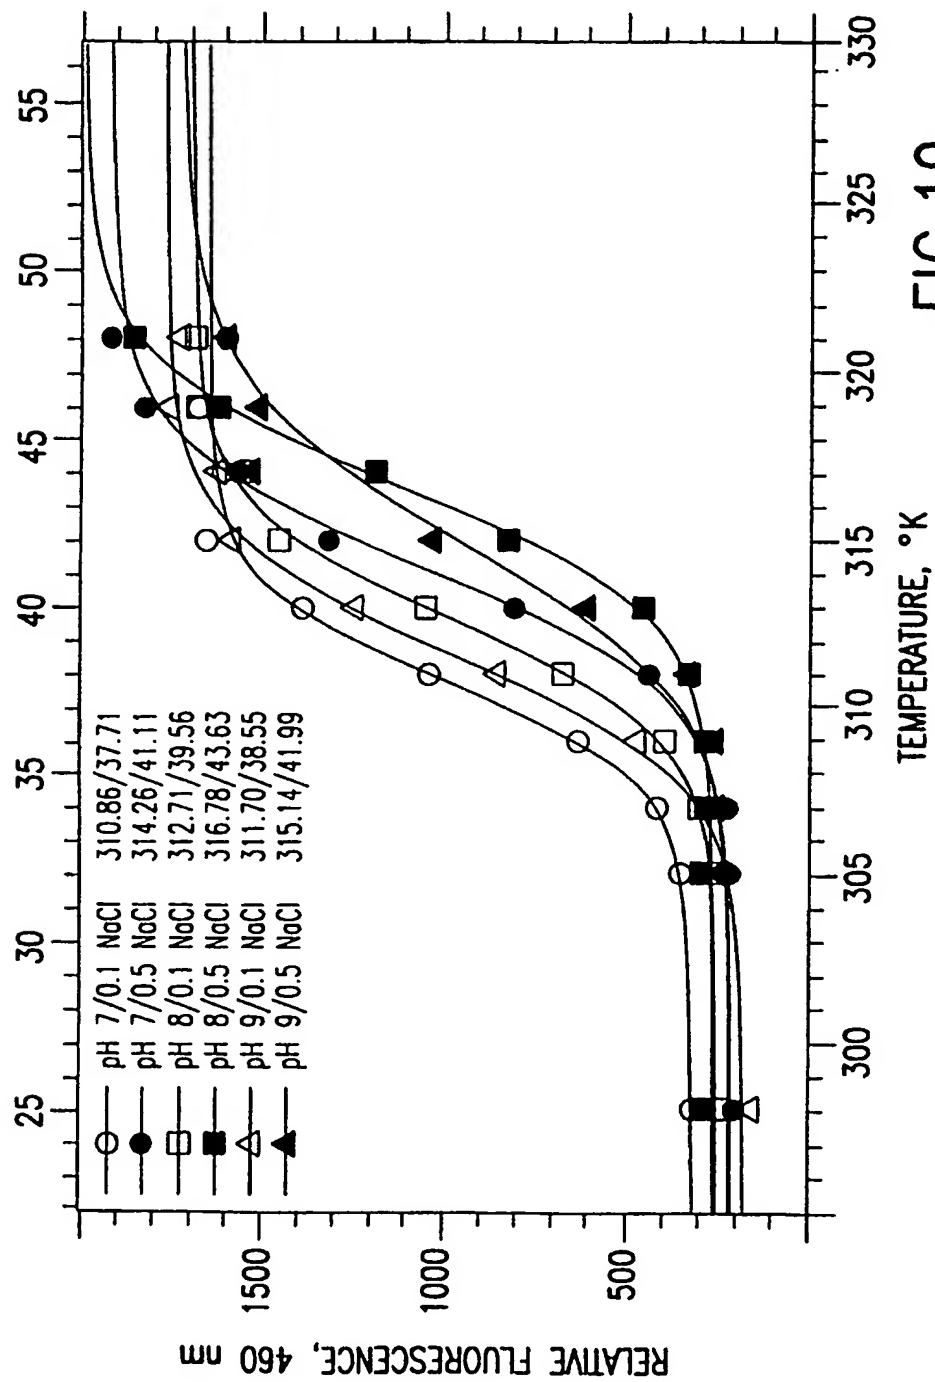
FIG.17D

FIG.17A

FIG.17C
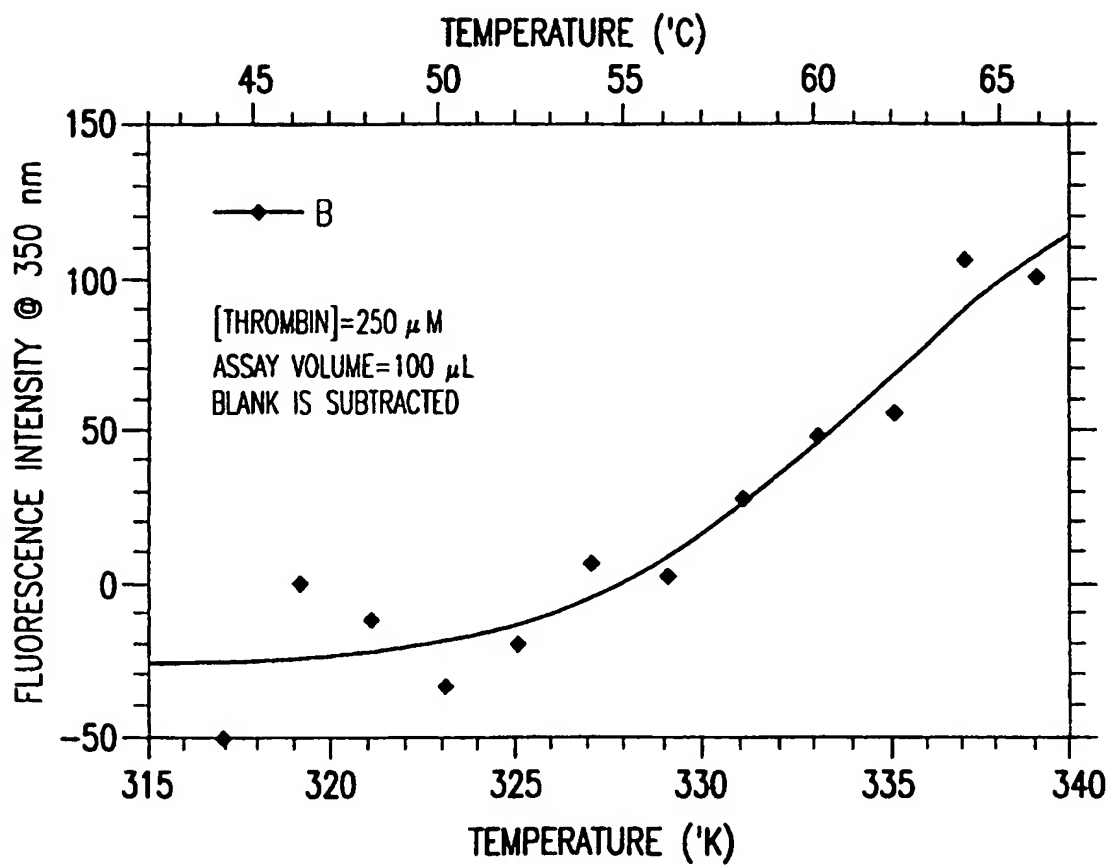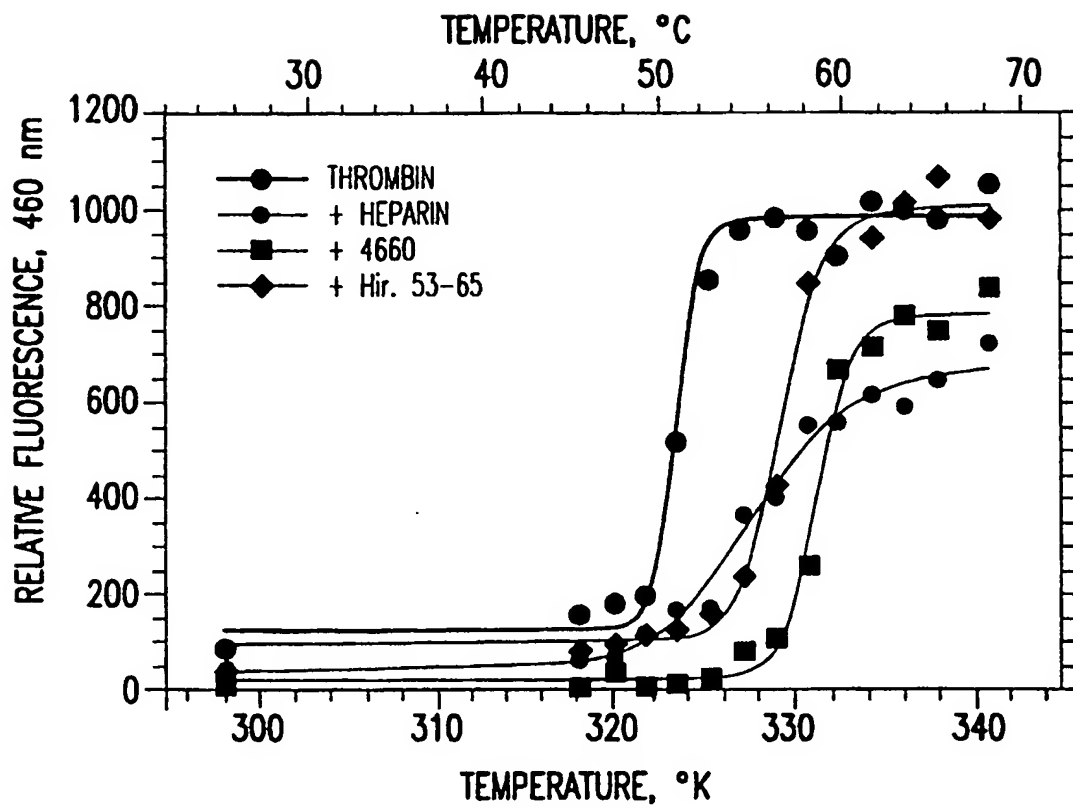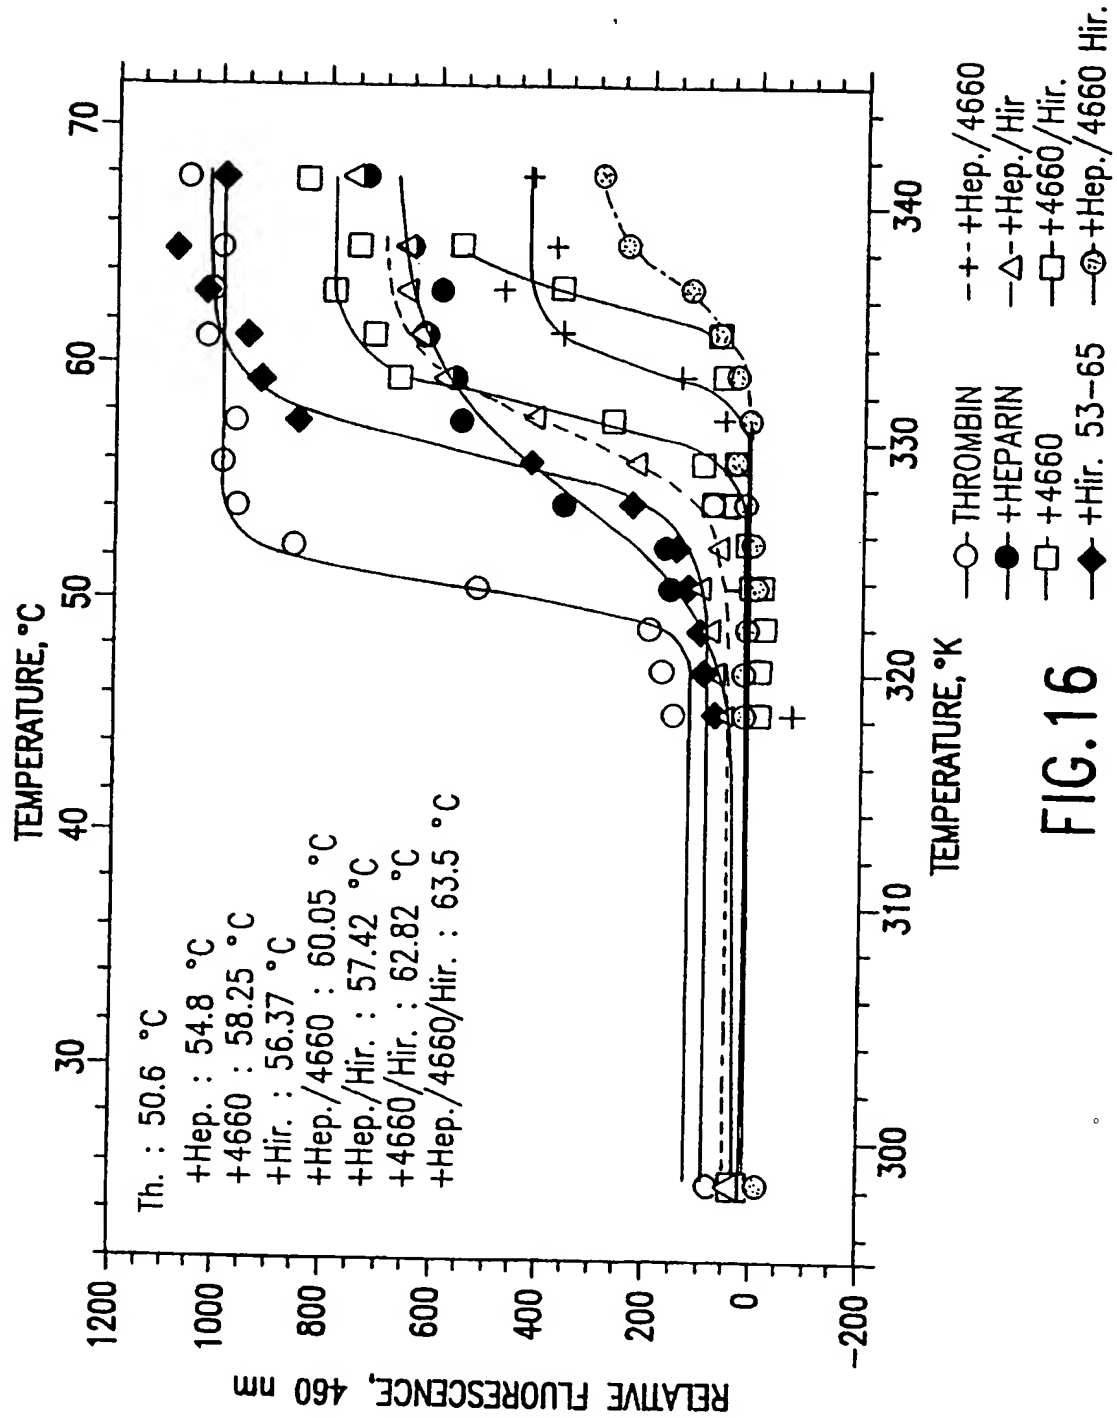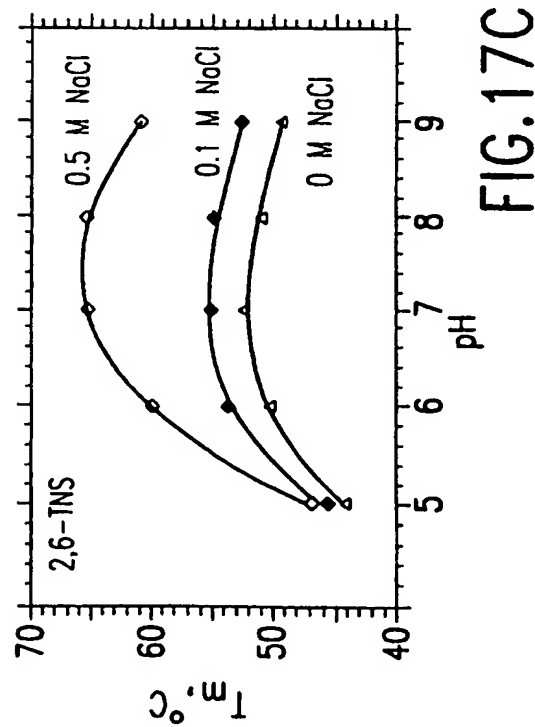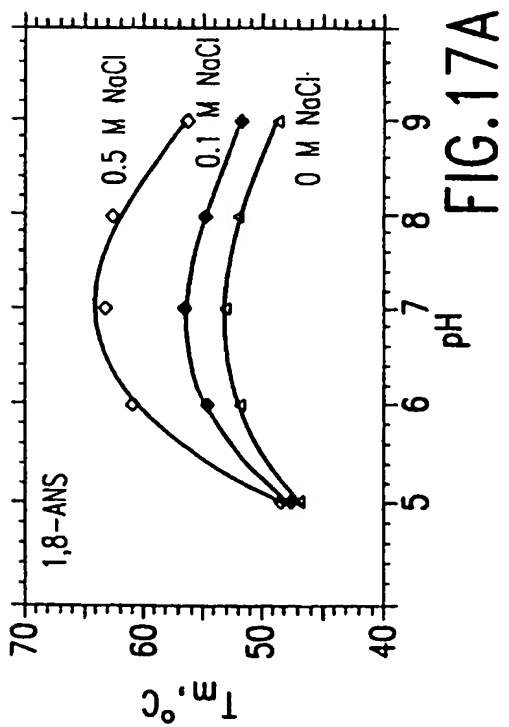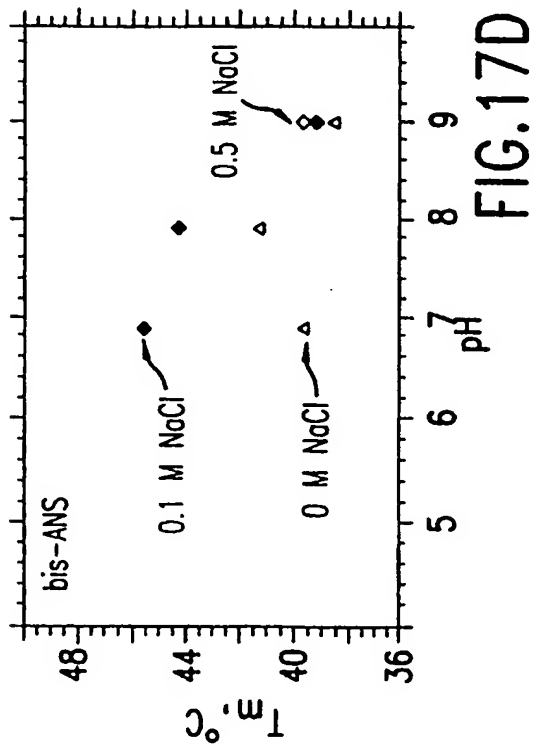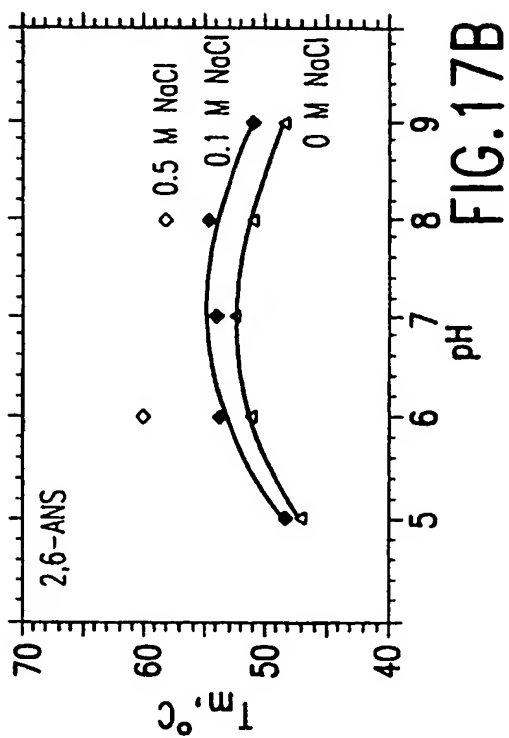
17/40

FIG.18

18/40

FIG.19

19/40
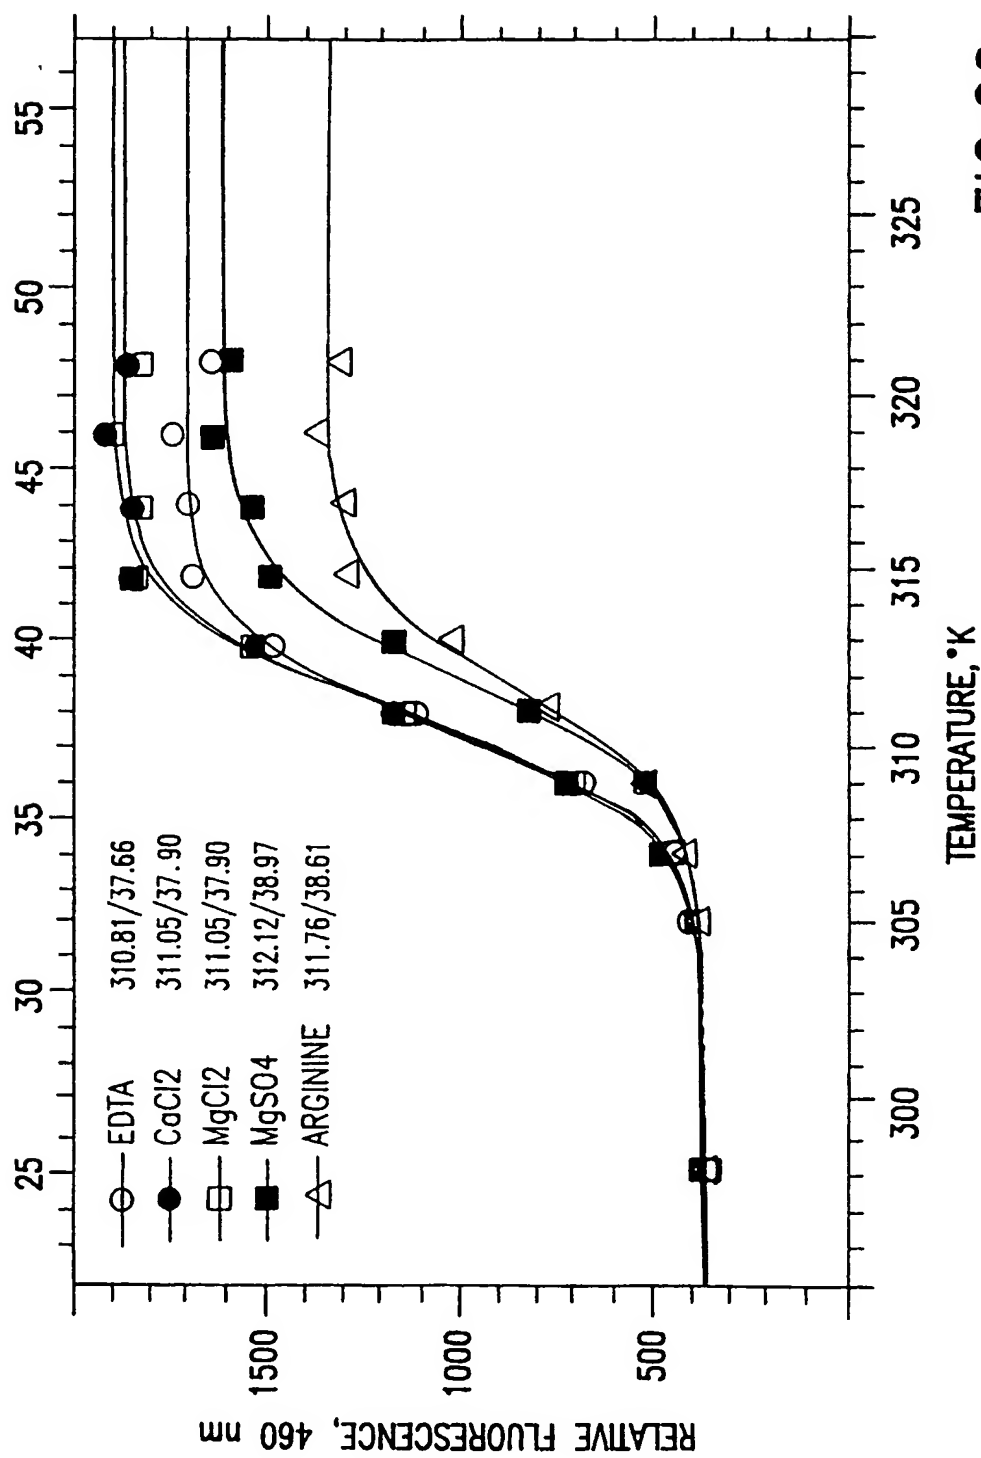

FIG.20

20/40

FIG.21

FIG.22

FIG.23

23/40

FIG.24

FIG.25

NATIVE-LIGAND COMPLEX

NATIVE STATE

UNFOLDED STATE

$$\triangle = \text{WATER MOLECULES}$$
$$\oplus = \text{IONIZABLE PROTONS}$$
$$\boxed{C} = \text{COUNTERIONS OR} \atop \text{HOFMEISTER SALTS}$$
$$\diamond = \text{DETERGENT OR} \atop \text{LIPID MOLECULES}$$

$$N'L' + [a'W + b'H + c'C + d'D]$$

$$\Delta G_{bind}$$

$$N'L' + [a'W + b'H + c'C + d'D] \atop N+L + [aW + bH + cC + dD]$$

$$\Delta G_{fold} = \Delta G_{conf} + \sum_i \Delta g_{i,int} + \sum_i \Delta g_{i,s} + \Delta W_{el} + (\Delta G_{bind})$$

$$\Delta G_{fold}$$

$$U + [a''W + b''H + c''C + d''D]$$

SELF-AGGREGATION

FIG.26

TAGGED DENATURED PROTEIN

H-H-H-H-H-H-

-R-R-R-R-R-R

DENATURANT: 6 M Gdn-HCl
              8 M Urea
              0.2% SDS
REDUCING AGENTS: DTT, OR βME

Ni^{2+}NTA Resin (Novagen)
Heparin Sepharose
(Pharmacia Biotech)

FILTER SCREEN
PLATE (Millipore)

A
B
C
D
E
F
G
H

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |

SUCTION FILTER TO REMOVE
DENATURANT

MICROPLATE PROTEIN FOLDING

REPLACE WITH n-VARIABLE REFOLDING CONDITIONS

A
B
C
D
E
F
G
H

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |

VARIABLE X (pH, TEMP., GLYCEROL, DETERGENT, [DETERGENT],
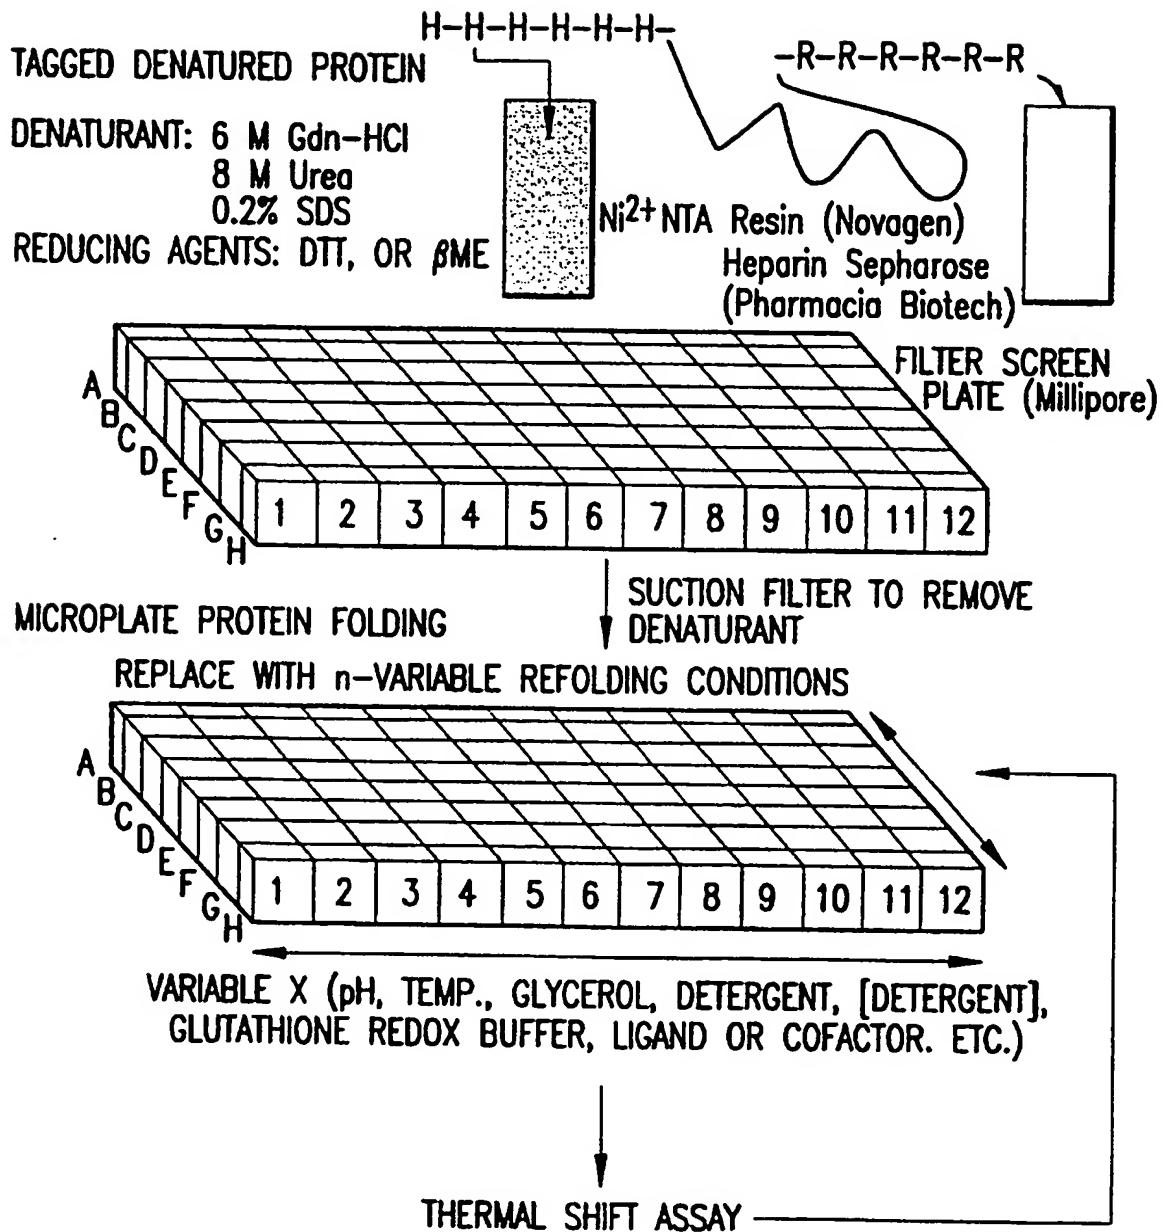GLUTATHIONE REDOX BUFFER, LIGAND OR COFACTOR. ETC.)

THERMAL SHIFT ASSAY

FIG.27

27/40

FIG.28

28/40

FIG.29

FIG.30

30/40

FIG.31

31/40

FIG.32A

FIG.32B

FIG.32C

FIG.32D

FIG.32E

32/40

FIG.33

33/40

FIG.34

FIG.35

HEAT CONDUCTING
BLOCK TEMPERATURE

ΔT

66 SECONDS = 6 READS + 6 MOVES

FIG.36A

TIME

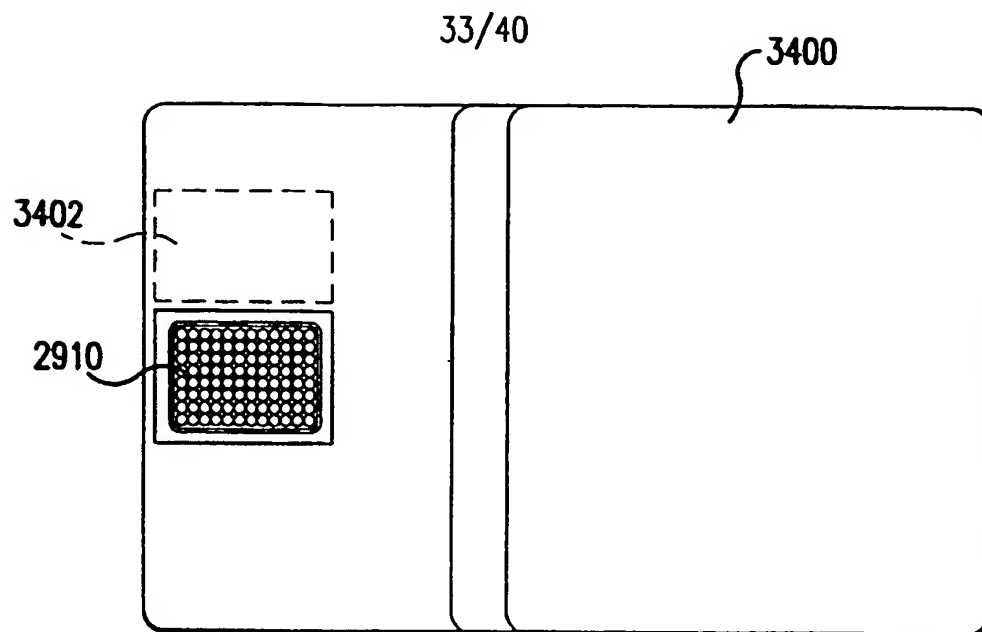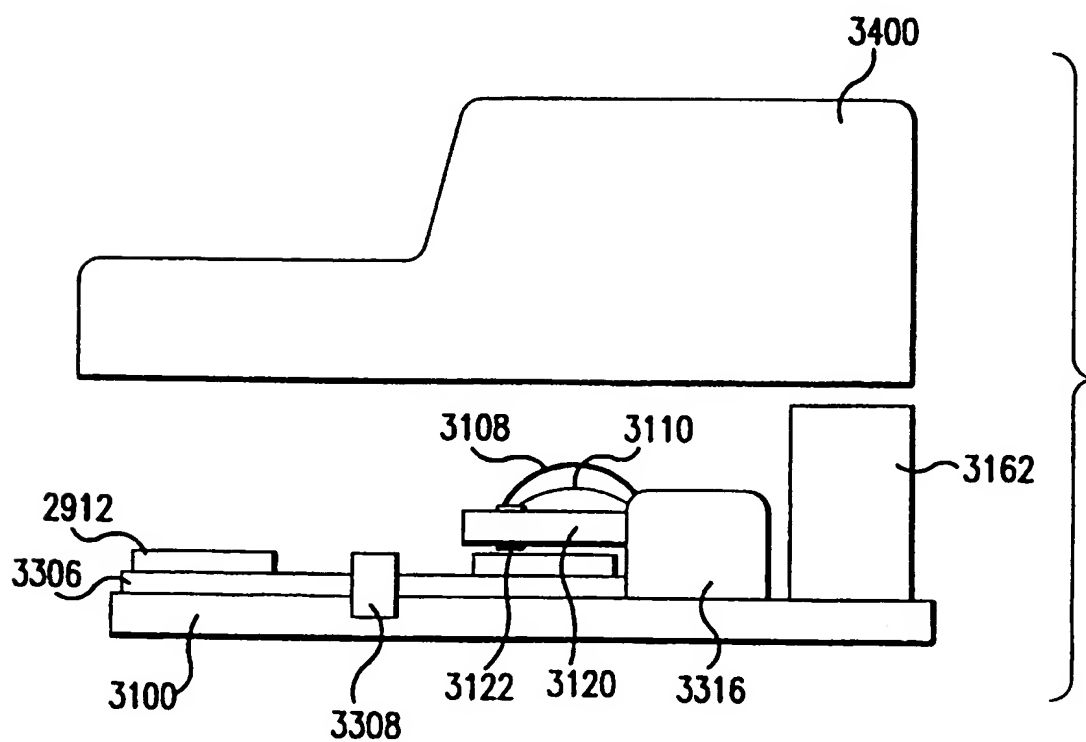1　2　3　4　5　6

READ
PLATE 1
(10 SEC)

MOVE
PLATFORM
TO NEXT
PLATE (1 SEC)

READ
PLATE 2
(10 SEC)

FIG.36B

35/40

FIG.37

36/40

```
                    ┌──────────────────┐
                    │      START       │  ╮ 3802
                    └──────────────────┘
                              │
                              ▼
                    ┌──────────────────┐
                    │   START TEMP     │  ╮ 3804
                    │    PROFILE       │
                    └──────────────────┘
                              │
                              ▼
                    ┌──────────────────┐
                    │   MOVE SENSOR    │  ╮ 3806
                    │  OVER SAMPLE OR  │
                    │  ROW OF SAMPLES  │◄─────────────┐
                    └──────────────────┘              │
                              │                       │
                              ▼                       │
                    ┌──────────────────┐              │
                    │    TRANSMIT      │  ╮ 3808       │
                    │    EXCITATORY    │◄──────┐       │
                    │      LIGHT       │       │       │
                    └──────────────────┘       │       │
                              │                │       │
                              ▼                │       │
                    ┌──────────────────┐       │       │
                    │ RECEIVE SPECTRAL │       │       │
                    │  EMISSION FROM   │  ╮ 3810│       │
                    │    SAMPLE(S)     │       │       │
                    └──────────────────┘       │       │
                              │                │       │
                              ▼                │       │
                         ◇ ALL ◇               │       │
                YES    ◇ ROWS OR ◇  ╮ 3812      │       │
          ┌──────────◇  SAMPLES  ◇             │       │
          │          ◇   DONE    ◇             │       │
          ▼            ◇  ?  ◇                 │       │
     ◇  ALL  ◇   NO        │ NO               │       │
   ◇ BLOCKS ◇ ──────┐      ▼                  │       │
   ◇  DONE  ◇       │  ┌──────────────────┐   │       │
     ◇ ? ◇          │  │  MOVE SENSOR TO  │   │       │
  3816   │ YES      │  │ NEXT WELL OR ROW │───┘       │
         ▼          │  └──────────────────┘  ╮ 3814   │
   ┌─────────┐      │            │                     │
   │   END   │      │            │           ┌─────────┴──┐
   │  TEMP   │      │            └──────────►│  ROTATE    │
   │ PROFILE │──► ┌──────┐                   │  PLATFORM  │
   └─────────┘    │ DONE │ ╮ 3822            └────────────┘
      3820        └──────┘                        ╮ 3818
```

FIG.38

3900

START 3902

START TEMP PROFILE 3904

TRANSMIT EXCITATORY LIGHT 3906

RECEIVE SPECTRAL EMISSION 3908

3910

ALL BLOCKS DONE ? NO

ROTATE PLATFORM 3912

YES

END TEMP PROFILE 3914

DONE 3916

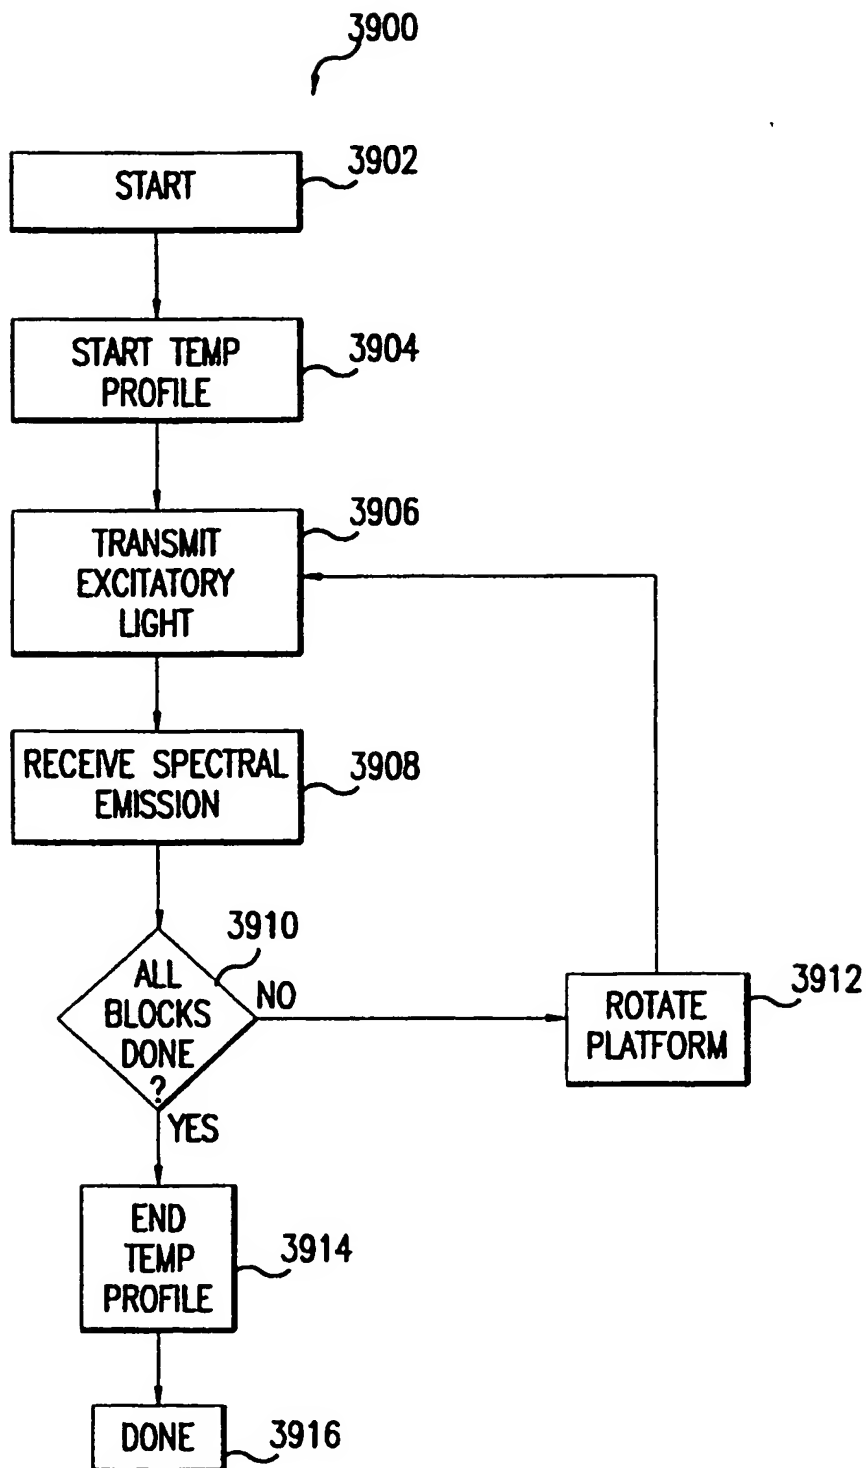FIG.39

38/40

FIG.40

39/40

CONTROL
ANS/
NO PROTEIN →

66°C ← —————————————— 44

FIG.41A

70°C ← —————————————— 46

CONTROL →

FIG.41B

40/40

FIG.42